


American Autowire has high quality crimp tools for your project !



Single wire crimp tool. Used for smaller gauge terminals.
p/n **500518**.....\$45



Double crimp tool. Used for larger gauge terminals and double wire crimps.
p/n **500523**.....\$89.95

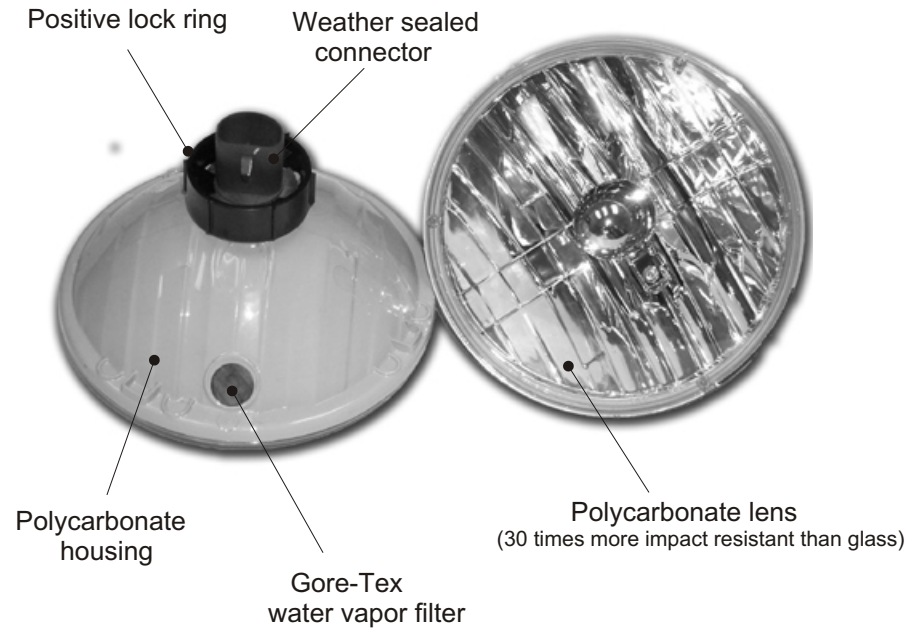

.8 pounds lighter than a stock headlight bulb !

DOT approved !

American
Autowire
Factory
automotive
wiring
Fit
We Make Wiring Easy!!
856-933-9301



INSTALLATION INSTRUCTIONS

Note: If you are installing this kit along with an American Autowire System wiring kit, proceed to step #4.

1- Existing sealed beam headlight.



2- Remove existing headlight bezel, retaining ring, and bulb. Disconnect headlight connector.



3- Remove existing connector and terminals



4- Install the supplied 3 position female terminals and connector on existing headlight wires. Note: the driver's side headlight usually has two wires going to the low beam circuit, and two wires to the hi beam circuit. Be sure that these wires are doubled together, as per the original configuration




5- Re-install housing and trim ring on new halogen bulb.



6-- Plug new wire harness into new halogen bulb, and trim wires to length.

If spacing is tight behind bulb assembly, a protective foam pad is included to protect wires.

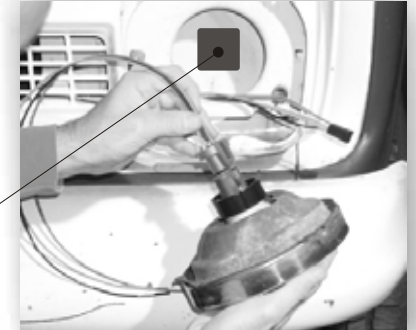

7- Install the supplied 3 position male terminals and connector on new halogen wires, matching wire FUNCTION with the existing headlight wires.

Tan- Low beam
Lt Green- Hi beam
Black- Ground



8- Completed assembly.

