
Fuse Box



Fuse Box Lid

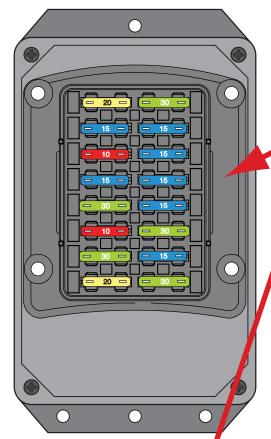

NOTE:

If your fuse box and fuse box lid look like this, these **ARE** the correct instructions for your application. If the word "BUSSMANN" appears on your fuse box or fuse box lid, you have have an earlier version of this kit and these **ARE NOT** the correct instructions.

KIT BOX CONTENTS:


KIII BOX	OOM EMOS
<u>Number</u>	<u>Description</u>
E40470	Alternator & Main Davier Companies Wit
510476	Alternator & Main Power Connection Kit
510883	Main Dash Harness Kit w/ AAW Fuse Panel
510653	Instrument Cluster Wiring Kit
510654	Rear Body Wiring Kit
510657	Headlight Bucket Wiring Kit
510730	Vehicle Speed Sensor, VSS, Lead Wires
520002	Digital Gauge System Dim Wire
510905	Front Light Wiring Kit
510906	Engine Wiring Kit
500042	Floor Dimmer Switch
510264	Headlight Switch
510557	Fuse, Relay & Flasher Kit
510655	Ignition Switch
510656	Grommet & Parts Kit
500919	Practice Terminal Kit
92973558	Kit Instruction Sheets
92971669	Firewall Template
92973597	Warning Page
	Classic Line



www.americanautowire.com 856-933-0801

Classic Update Kit 1957-60 Ford Truck **510651**

92973796 Rev. 1.0 10/21/2025



WARNING: This harness is intended to be used in a modified vehicle. Please read this sheet thoroughly and be sure that you understand everything explained on it prior to opening any of the enclosed packages, or before attempting to install any of the components. Once this kit has been opened or any component has been installed, the kit is not returnable.

- 1. This kit should be used in a **MODIFIED** application only, and is **NOT** intended as an OEM replacement.
- 2. This kit **Does Not** include any factory original A/C Wiring, but does include wiring for both the standard and deluxe style heater systems, and will also support any aftermarket heat or A/C system.
- 3. This kit **Does** support the use of a self-exciting 1-wire alternator or other style internally regulated alternator. An adapter may be necessary in some applications. Please check the manufacturer's instructions as a resistor may be necessary on the exciter wire if using anything other than a 1-wire unit.
- 4. This kit **WILL NOT** support the use of a factory tachometer in its original connection application as those tachometers wired the primary ignition circuit directly in series with the tachometer and then out to the positive side of the coil. Any addition of a high energy ignition (HEI), or some aftermarket ignition systems, may cause the ignition system to become non-functional. **HOWEVER**, if your original factory tachometer has been upgraded or retrofitted to a later style movement where the pulse post on the tachometer connects to the negative side of the ignition coil, or to the tachometer output of an aftermarket control module, and the feed post of the tachometer uses a conventional 12 volt ignition connection, you will be able to use this harness system.
- 5. This kit **IS NOT** set up with a resistance wire for a standard, points-type ignition system. It is wired with a full 12 volt primary ignition feed that is hot in both the start and run positions. It will support HEI, MSD or other electronic ignition systems as well as computerized fuel injection systems. If you wish to run a "points-type" system, a ballast resistor will be required (not included in this kit). There are illustrations on the engine connection pages, to do so.



510651 - Classic Update Series Kit 1957-60 Ford Truck

This kit contains the following components:


Part Number	<u>Description</u>	Quantity
500042	Floor Dimmer Switch	1
500919	Practice Terminal Crimping Set	1
510655	Ignition Switch	1
510264	Headlight Switch	1
510557	Fuse, Relay, and Flasher Kit	1
510656	Grommet and Parts Kit	1
510883	Dash/Main Harness Kit	1
510653	Instrument Cluster Kit	1
510905	Front Light Kit	1
510906	Engine Kit	1
510654	Rear Body Kit	1
510657	Headlight Extension Kit	1
510730	VSS Connection Kt	1
510476	Alternator and Main Power Connection	n kit 1
520002	Digital Gauge System Dim Wire - For	d Kits 1
92973558	Introduction Instruction Sheet	1
92973597	Warning Sheet	1
92971669	Fuse Block Installation Sheet	1
	500042 500919 510655 510264 510557 510656 510883 510653 510905 510906 510654 510657 510730 510476 520002 92973558 92973597	500042 Floor Dimmer Switch 500919 Practice Terminal Crimping Set 510655 Ignition Switch 510264 Headlight Switch 510557 Fuse, Relay, and Flasher Kit 510656 Grommet and Parts Kit 510883 Dash/Main Harness Kit 510905 Front Light Kit 510906 Engine Kit 510654 Rear Body Kit 510657 Headlight Extension Kit 510730 VSS Connection Kt 510476 Alternator and Main Power Connection 520002 Digital Gauge System Dim Wire - Fore 92973558 Introduction Instruction Sheet

Validate the kit contents with this component list. If there are any discrepancies with incorrect or missing parts, stop your installation and notify the supplier you purchased the kit from before proceeding.



retaining clamp

1957-1960 Ford truck fuse block mounting instructions

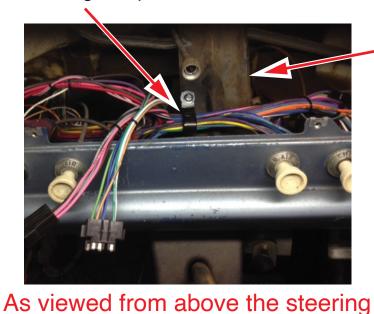

wheel, looking into the dash

steering column/ dash support bracket

> emergency brake firewall bracket

Cab truck

photograph is of a 1960 Ford F100 Custom

dimmer

switch

NOTE:

1. With the wires exiting the top end of the fuse block, position the fuse block on the firewall approximately as shown in the photo. The general location will be above the dimmer switch and to the right of the emergency brake firewall bracket. There is one mounting hole in the lower flange and three in the top flange; use the two top holes that are on either side of the wires exiting the fuse block. Mark and drill three 1/8" (.125) dia holes in your firewall. Use the three screws, "item CCC", in the 92971642 loose piece kit (for the 510652 dash harness), to attach the fuse block to your firewall. If necesarry, cut back any sound deadener or carpet, to mount the fuse block.

As viewed from under the dash

- 2. Be sure to check for clearances of any accessories that you might be adding. The stock clutch and brake pedal assembly pose no concerns at all when mounted in this location.
- 3. The design of your new AAW dash/main harness allows for you to route it approximately the same way as your original dash harness did. Once the fuse block has been attached to the firewall of the truck, the harness routes up and over top of the pedal carriage (in behind the speedometer assembly) and will be held in place by a retaining clamp, mounted to the steering column/dash support bracket as shown above; a second clamp is included, should you require it (clamps "item S" and hardware "item R" are included in parts kit 510656). It will then continue over to the RH door jamb area above the choke and heater/blower control switches and over top of the ashtray assembly and then continuing on to the the glove box, heater box, and RH underdash courtesy lamp areas. Please take time to keep the harness wires away from any moving items.



www.americanautowire.com 856-933-0801

92971669

Classic Update Series

1957-60 Ford Truck -START HERE!

PLEASE READ THIS BEFORE STARTING INSTALLATION!

This wiring kit is designed for ease of installation. Please read the guidelines below, BEFORE STARTING your installation to guarantee a successful job. Use an appropriate crimping tool which folds the wings of the open barrell terminals down into the wire as shown below. If you use our crimping tools and correctly crimp the included terminals, soldering is not necessary. If you are unsure about a particular crimp, soldering is recommended. Our factory crimped terminations are installed by GM approved five ton presses, and soldering these terminations is not necessary. AAW offers a great terminal crimping video entitled "Proper Crimping Video". It can be viewed by visting YouTube. Type the following address into your web browser to go directly to the video: www.youtube.com/watch?v=JAgEDoVI-co.



PLEASE READ THESE HELPFUL INSTALLATION TIPS BEFORE GOING ANY FURTHER!

Prior to installing the Dash/Main harness in your vehicle, plug all of the fuses (see a detailed picture, on page 18, of the fuse installation locations) and Horn Relay (see page 9), into this harness.

AS THIS HARNESS IS DESIGNED FOR USE IN A MODIFIED VEHICLE REQUIRING A HIGHER RATE OF CHARGE, IT DOES NOT SUPPORT THE USE OF A STOCK (ORIGINAL) GENERATOR. IT IS DESIGNED FOR USE WITH AN INTERNALLY REGULATED GM "SI" STYLE OR SINGLE WIRE STYLE ALTERNATOR. ADAPTERS (WHICH ARE NOT INCLUDED WITH THIS KIT) THAT ARE AVAILABLE FROM SEVERAL SOURCES WILL BE NECESSARY TO USE ANY ALTERNATOR OTHER THAN A GM "SI" STYLE OR SINGLE WIRE STYLE UNIT.

STEP 1: DISCONNECT YOUR BATTERY:

Disconnect the battery before installing the wiring kit to prevent any accidental shorting caused by loose bare wire ends.

STEP 2: START INSTALLING KIT (see page 5):

This kit is broken down into individual steps that are identified by a letter printed on the instruction sheets visible through each bag. These letters are the order of operation for installing your kit, start with bag letter G. The order of installation is shown below. You will use this main instruction sheet, **92971606**, to complete the installation process of bag G. See page five of this instruction set and Fuse Block Mounting instruction sheet 92971669 to begin.

G - 510883 Dash Harness Kit

J - 510905 Front Light Kit

K - 510906 Engine Kit

N - 510657 Headlight Harness Kit

H - 510653 Gauge Cluster Kit

M - 510654 Rear Body Kit

Z - 510476 Alternator and Main Connection Kit

STEP 3: RECONNECT YOUR BATTERY:

When you have completed the installation and are ready to reconnect the battery, make sure that the following electrical system grounds are in place:

- A. Battery is grounded to the ENGINE BLOCK. B. Battery is grounded to the frame.
- C. Engine block is grounded to the frame.
- D. Body is grounded to the frame.

STEP 4: CHECK ALL ELECTRICAL FUNCTIONS:

Any non-functioning items should be checked for proper installation. Any problems with your wiring and electrical circuit functions should be addressed to American Autowire Systems, Inc. as soon as possible to avoid any warranty problems.

If you have any questions concerning this or any of our products, please feel free to call us at 1-856-933-0801.

AMERICAN AUTOWIRE MAKES IT EASY !!

We carry many accessories for your 1957-60 Ford Truck

p/n 510585

OEM small terminal crimping tool (18-14 gauge)



p/n 510586

OEM large terminal crimping tool (12-8 gauge)



p/n 500479 Universal Relay Kit

p/n 500093 Universal Waterproof Relay Kit



p/n 500918



p/n 500801 Ballast Resistor Kit



p/n 500802 GM "SI" series to Ford "3G" int. regulated alternator











1957-60 Ford Truck

Classic Update Series

510651


© COPYRIGHT 2004 American Autowire / Factory-Fit Used with express permission of American Autowire / Factory-Fit 92973558 Rev 0.0 2/1/2022

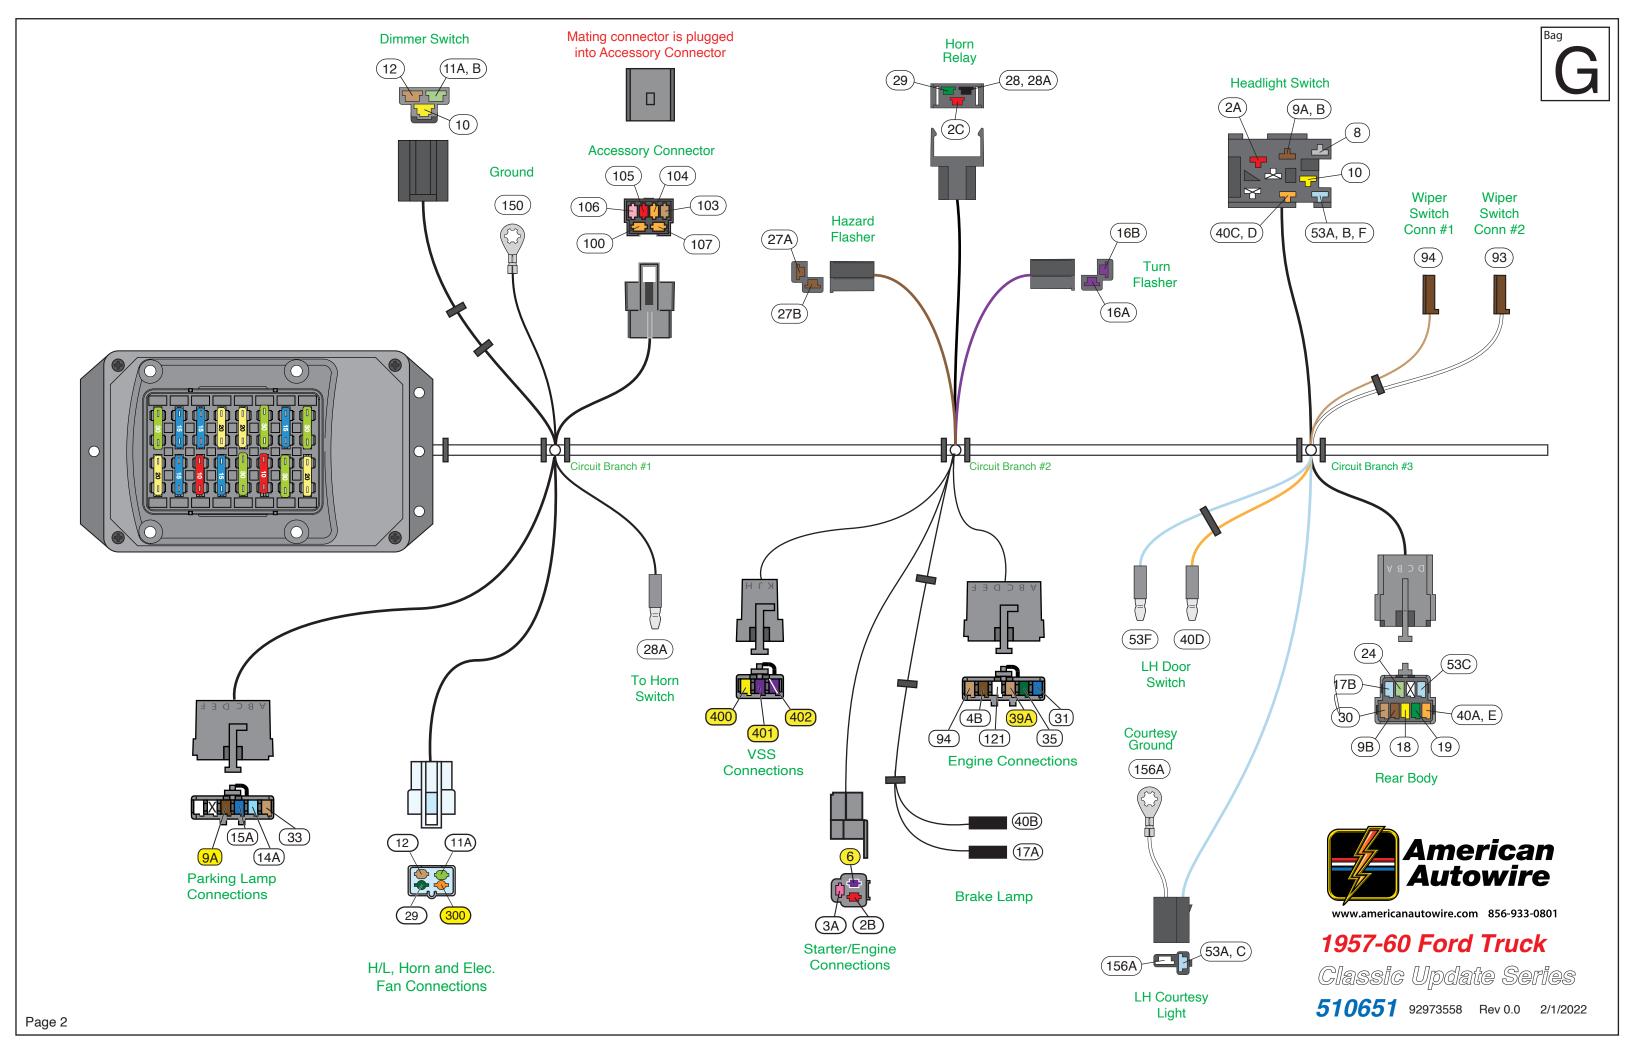


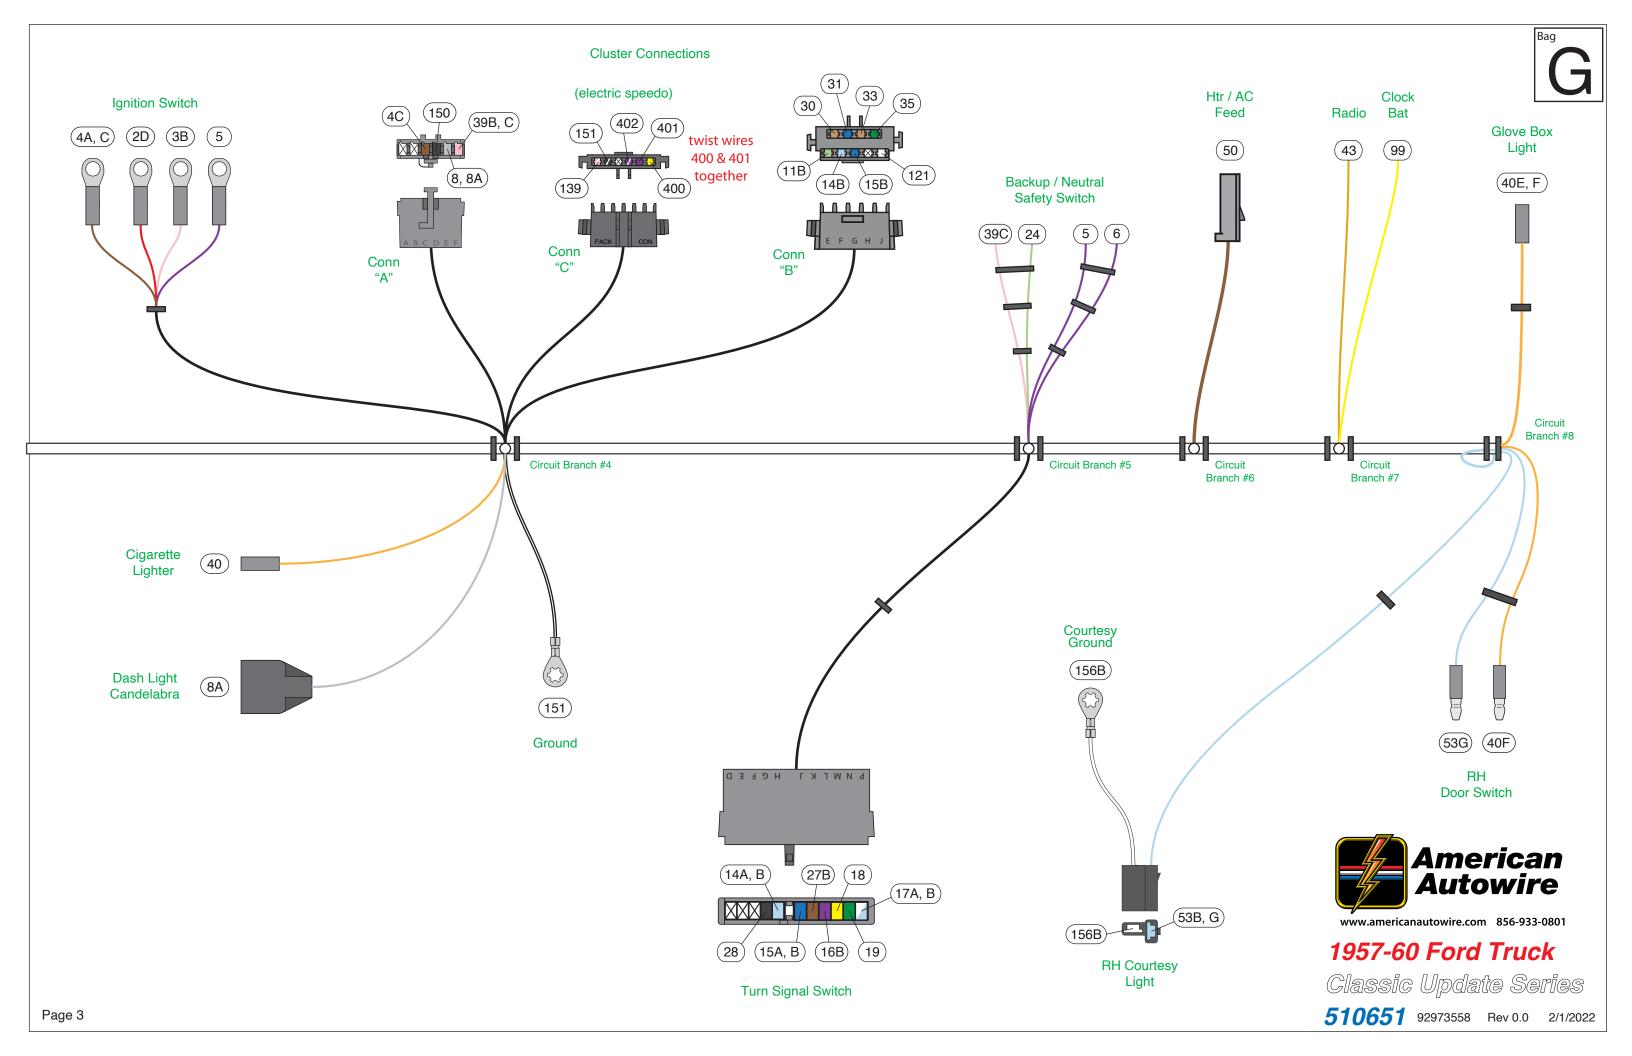

<u>Dash Harness Jumpers and Extensions:</u>



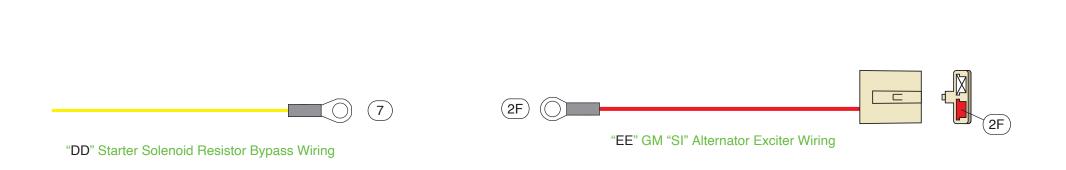

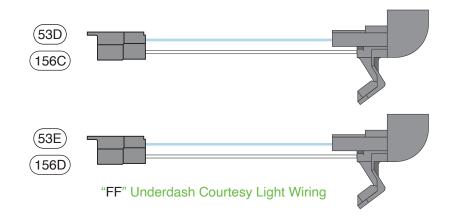


NOTE: Your new underdash courtesy light extensions, use # 631 bulbs (not included with this kit)
They may be purchased at any auto parts store.




"GG" Heater Switch to Blower Motor, Standard Heater





"JJ" Heater Switch to Blower Motor, Deluxe Heater

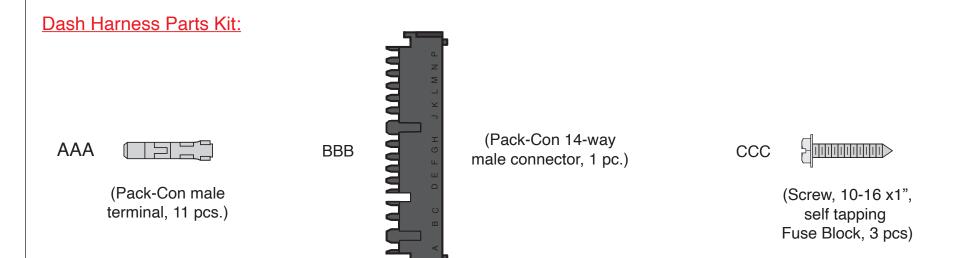



1957-60 Ford Truck

Classic Update Series

Note: Prior to installing the Dash Harness, obtain the Fuse, Flasher, and Relay Kit #510557 (located in Bag G) and plug all of the Fuses in the Fuse Block (See Figure "F" on page 18 for the location of the fuses). Install the Horn Relay and the two Flashers to the Dash Harness (see Circuit Branch #2 - Under Dash Connections).

NOTE: All Grommets, Terminals, Connectors, Door Jamb Switches, Screws, Washers, Clamps and Sleeves, can be found in Parts Kit 510656 and are denoted with one letter: "X".

The various Dash Harness Jumper Harnesses can be found in Bag G and are denoted with two letters: "XX". See page 4 for a depiction of the Jumper Harnesses.

The Fuse Block Attaching Screws and the Turn Signal Switch Connector and Terminals are found in the Dash Harness Parts Kit 92971642 and are denoted with three letters "XXX".

Main Fuse Panel Installation

Install the Fuse Block per the Fuse Block Mounting Instructions Template 92971669. Use the three screws "CCC" in the Dash Loose Piece Kit 92971642 to attach the Fuse Block.

Dash Harness Routing

The Main Dash Harness routing of the wires that go in the Instrument Panel will be the same as the original factory Instrument Panel Wiring Harness routing. The Main Dash Harness routing of the wires that go into the Engine Compartment will pass through Grommet "F".

Obtain Grommet "F" and attach to the Firewall in the original factory location. Use your original metal retainer (or a replacement) to hold the grommet in place; the metal retainer is not included in this kit (see Figure "H" on page 14). You will pass the wires from Circuit Branch #1 of your Dash Harness, that go into the Engine Compartment, through Grommet "F" first, from Circuit Branch #2 second, and then the Rear Body Harness wires in Circuit Branch #3 will be routed through Grommet "F" last.

J Clamps

There are four rubber coated smaller J-Clamps (item "G") to be used to secure the main bundle of the Dash Harness as it routes across the Firewall in the Engine Compartment.

There are two rubber coated larger J-Clamps (item "S") and two 1/4x20x1/2" screws, two 1/4x20 locking nuts, and two 1/4" Washers (item "R") to secure the main bundle of the Dash Harness as it routes across the Steering Column Support Bracket in the Instrument Panel.

Circuit Branch #1 – Engine Compartment Connections (see Figure "A" on page 15). Plug the 510905 Front Light Extension harnesses onto the dash at this location and bring the wires through the firewall as shown on page 15. See page 15, "Figure A" for typical connections. For loose piece terminals and connectors, see kit # 510656.

1. Horn Switch in Steering Column Connection

When you press the Horn Switch, it turns on the Horn Relay by grounding one of the wires (circuit 28 or 28A) from the Horn Relay. Wire 28A, which is in the Dash Harness, should plug into the stock Horn Switch Ground wire coming out of the bottom of the original Ford Truck Steering Column.

If you have an Aftermarket Steering Column, Wire 28A will not be used and should be taped back. There is another circuit, Wire 28, which is also in the Dash Harness but is located in the Turn Signal Switch Connector. This Wire 28 will connect to the Aftermarket Steering Column and provide ground for the Horn Relay through the Turn Signal Switch in the Steering Column.

Wire #	Wire Color	Printing	Description
28A	Black	Horn Ground	Horn Relay ground wire to the Horn Switch.

Upgraded Brake System

NOTE: If you choose to upgrade your single reservoir Brake System to an upgraded dual resevoir Brake System with a "check light", we have provided the circuits in the Dash Harness for a Brake Warning Light (Dash lamp and switch/switch connection not provided in kit).

2. The Brake Pressure Differential Warning Switch

NOTE: if you have a Ford style twin post switch and wish to use it, simply cut the wires about 6 inches back from your old original connector, double them together, and splice them into wire assembly 33 (from page 5 of this instruction sheet) to complete your brake warning circuit. If you have an aftermarket single post switch, splice it into wire assembly 33 (from page 5 of this instruction sheet) to complete your brake warning circuit (also see Figure A on page 15).

3. Brake Pressure Differential Warning Switch Dash Harness Connection

Route wire 33 from the Dash Harness to the master cylinder area, cut to length, and splice it to the Brake Pressure Differential Warning Switch Extension (if needed).


Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
33	Tan	BRAKE LIGHT/SWITCH	Brake Warning Light wire

4. Aftermarket Electric Fan Wire

This wire is a fused 12V Accessory feed wire which comes directly from the Fuse Block and is intended to be used as the relay trigger wire for an Electric Fan Relay. Route this orange "ELECTRIC FAN" wire (circuit 300) to a relay kit.

Note: An Optional Relay Kit (Universal Relay Kit 500479 or Universal Waterproof Relay Kit 500093) can be purchased from AAW. Connect per the instructions in the Relay Kit.

wire #	wire Color	Printing	<u>Description</u>
300	Orange	ELECTRIC FAN	Electric Fan Relay Feed.

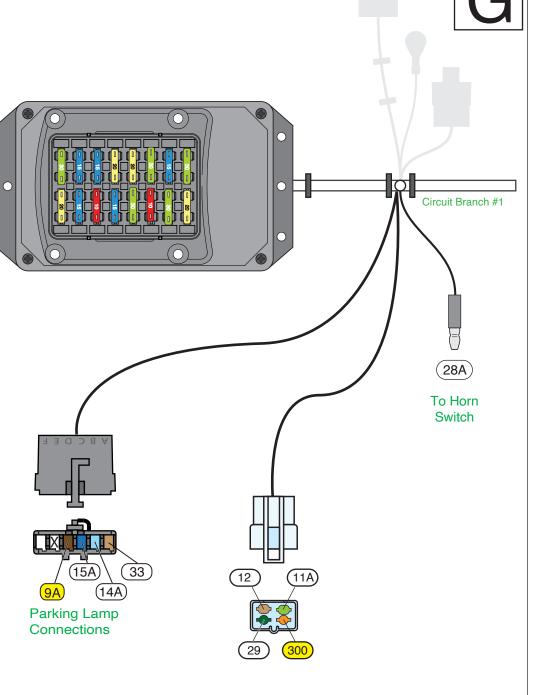

H/L, Horn and Elec. Fan Connections



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

Circuit Branch #1 - Engine Compartment Connections (continued)

Preparing the Parking Light Assemblies (see Figure "A" on page 15)

Note: For all vehicles, you will use your original Park/Turn Light Socket and Pigtail Assemblies but will have to replace the original 2-way molded pigtail connector, or the original two 1-way molded pigtail connectors with a 2-way connector "V" and terminals "W". Cut the original molded connector(s) from the Park/Turn Light pigtail and crimp on a terminal "W" to each wire. Route the two wires through the access hole and seat the original pigtail grommet (if equipped) in the hole. Plug these "W" terminals into connector "V". Note that the wire function/colors are as follows:

LH Turn Signal - green/white (Ford) to light blue (AAW).

RH Turn Signal - white/blue (Ford) to dark blue (AAW).

Park Lights - black/yellow (Ford) to brown (AAW).

5. Park Light Wire Connections

For the left hand (LH) Park Light connection, obtain the brown "PARK LIGHTS" wire (circuit 9A) from the Dash Harness and route the loose end of this wire to the LH Park/Turn Signal Light pigtail and cut to length, double this wire with the cutoff portion of the brown wire and crimp on terminal "C". Plug this wire into the 2-way connector "T", route the cutoff portion of the brown wire to the RH Park/Turn Signal Light pigtail. Cut to length, crimp on terminal "B" and plug into the other 2-way connector "T".

Wire # Wire Color **Printing Description** PARK LIGHTS Park Lights feed Brown

6. LH Turn Signal Light Wire Connections

Obtain the light blue "LEFT FRONT TURN" wire (circuit 14A) from the Dash Harness and route the loose end of the wire to the LH Park/Turn Signal Light pigtail and cut to length, crimp on terminal "B" and insert into connector "T".

Wire # Wire Color **Printing** Description

Light Blue LEFT FRONT TURN Feed to the LH Front Turn Signal Light.

7. RH Turn Signal Light Wire Connections

Obtain the dark blue "RIGHT FRONT TURN" wire (circuit 15A) from the Dash Harness and route the loose end of the wire to the RH Park/Turn Signal Light pigtail and cut to length, crimp on terminal "B" and insert into connector "T".

Wire # Wire Color **Printing Description**

Dark Blue RIGHT FRONT TURN Feed to the RH Front Turn Signal Light.

Front Headlamp Connections (see Figure "A" on page 15)

Headlight Harness Kit

Obtain the Headlight Harness Kit 510657 and connect to the LH and RH Headlights (see the Instructions 92971656 in Bag N for the Headlight connections).

8. Low Beam Headlight Wire Connections

Obtain the tan "HEADLIGHT-LOW BEAM" wire (circuit 12) from the Dash Harness and route the loose end of the wire to the LH Headlight Bucket Harness, cut to length, double the tan wire with the tan wire that was just cut off, crimp on terminal "X", and insert into connector "U". Route the loose end of the tan wire to the RH Headlight Bucket Harness, cut to length, crimp on terminal "W" and plug into the other connector "U". Be sure that the tan wire aligns with the tan wire in the Headlight Bucket Harness.

Wire # Wire Color **Printing Description**

12 Tan HEADLIGHT-LOW BEAM Feed to the Low Beam Headlights.

9. High Beam Headlight Wire Connections

Obtain the light green "HEADLIGHT-HI BEAM" wire (circuit 11A) from the Dash Harness and route the loose end of the wire to the LH Headlight Bucket Harness, cut to length, double the light green wire with the light green wire that was just cut off, crimp on terminal "X", and insert into connector "U". Route the loose end of the light green wire to the RH Headlight Bucket Harness, cut to length, crimp on terminal "W" and plug into the other connector "U". You can connect to the Headlight Bucket Harnesses.

Wire # Wire Color **Printing Description**

11A Light Green HEADLIGHT-HI BEAM Feed to the High Beam Headlights.


10. Horn Wire Connection

Obtain the dark green "HORN" wire (circuit 29) from the Dash Harness and route the loose end of the wire to the Horn and cut to length.

If you have the original Horn, slide sleeve "J" onto the green wire and then crimp on ring terminal "M". Slide sleeve "J" over ring terminal "M". Connect to the Horn.

If you have a replacement Horn with a male blade terminal, crimp on terminal "B" to the green wire and plug into connector "N". Connect to the Horn.

Wire # Wire Color **Description Printing** Dark Green HORN Feed to the Horn.

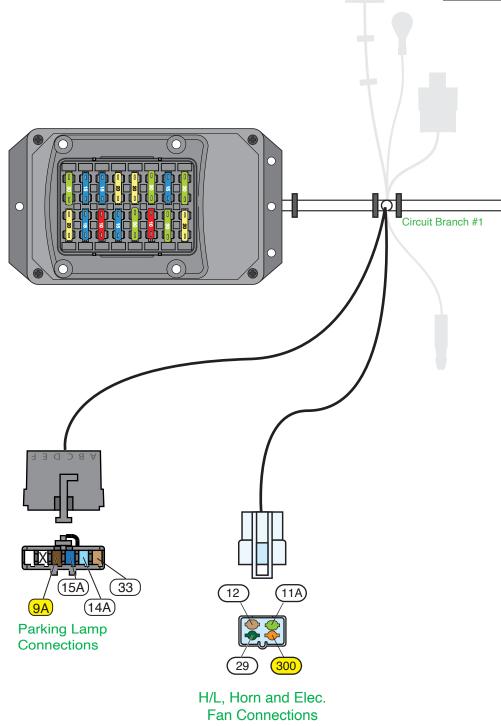



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

Circuit Branch #2 Engine Compartment Connections (see Figures "B" and "C" on page 16). Plug the 510906 Engine Extension harnesses onto the dash at this location and bring the wires through the firewall as shown on page 16. See page 16, "Figure B" for typical connections. For loose piece terminals and connectors, see kit # 510656.

1. Brake Switch Connectors

Connect these two 1-way female bullet connectors to the Brake Switch (Stop Light Switch) which is located on the Brake Master Cylinder, polarity doesn't matter.

Wire #	Wire Color	<u>Printing</u>	Description
17A	White	BRAKE SW	Brake Switch feed to the Turn Signal Switch.
40B	Orange	BRAKE SW	12V Battery Fused feed from the Fuse Block.

2. VSS Connection: NOTE: These three wires are only used if you are using an Aftermarket Electric Speedometer. These wires and connector are for use with an aftermarket electric speedometer. only. The VSS Lead Wires, 510730, bag V, will plug In here. Refer to that instruction sheet for wire functions and additional directions.

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
400	Yellow	VSS GROUND	Vehicle Speed Sensor Ground.
401	Purple	VSS SIGNAL	Vehicle Speed Sensor Signal.
402	Purple/White	VSS POWER	Vehicle Speed Sensor Power.

3. Washer Pump (if equipped). NOTE: This wire is only used if you have an Aftermarket Windshield Washer Pump.

Obtain the tan "no printing" wire (circuit 94) and route this wire to the Washer Pump, cut to length, crimp on terminal "B", and plug into connector "E". Now connect to the Washer Pump.

Wire #	Wire Color	<u>Printing</u>	Description
94	Tan	no printing	Feed to an Aftermarket Washer Pump.

ENGINE CONNECTIONS (Figure B)

4. Electric Choke. NOTE: This wire is only used if you have an Aftermarket Electric Choke.

Obtain the tan "ELECTRIC CHOKE" wire (circuit 39A) and route this wire to the Electric Choke and connect.

Wire #	Wire Color	Printing	<u>Description</u>
39A	Tan	ELECTRIC CHOKE	Feed to the Electric Choke.

5. Ignition Feed (see Figure "B" on page 16)

This pink "IGNITION FEED-COIL" wire (circuit 3A) is the 12V switched power source for the Distributor/Ignition Coil. This wire can be connected directly to the "Bat" terminal on a typical HEI Distributor, to a Ballast Resistor for a points type Distributor, or to be used as the ignition power source for an Aftermarket Ignition Module such as an MSD or a "Dura Spark" module. See the installation instructions for the type of Distributor/Ignition Module you are using for specific connection requirements.

If you are using a GM style HEI Distributor, terminal "C" and connector "P" have been provided to make that connection.

If you are using a Ballast Resistor (Ballast Resistor not included in this kit), two "C" terminals, and two "E" connectors have been provided to make that connection.


Note: An optional Ballast Resistor is available from AAW under part number 500801.

I	Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
	3 A	Pink	IGNITION FEED-COIL	Switched 12V Ignition feed for the ignition.

6. Engine Sensors

Route the dark blue "OIL PRESSURE SENDER" wire (circuit 31) to the Oil Pressure Sender, and the dark green "WATER TEMP SENDER" wire (circuit 35) to the Water Temperature Sender, cut to length, install terminals "B" or "M" (install sleeve "J" first if using "M"). If you are using terminal "B", plug it into connector "N".

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
31	Dark Blue	OIL PRESSURE SENDER	Oil Pressure Sender.
35	Dark Green	WATER TEMP SENDER	Water Temperature Sender.

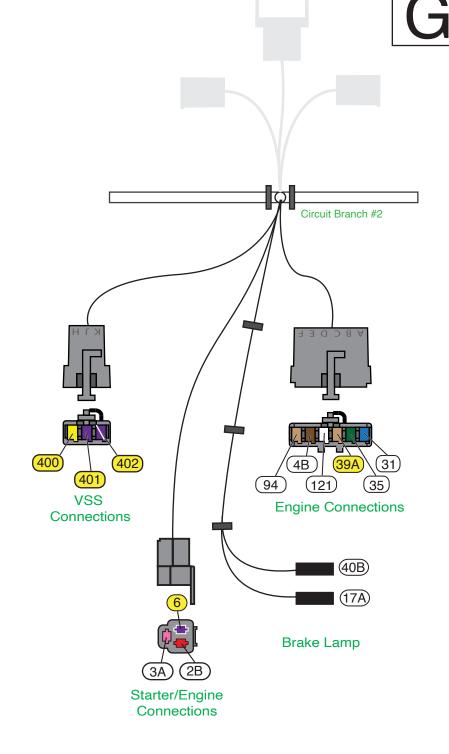



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

Circuit Branch #2 Engine Compartment Connections (continued)

7. Tachometer

NOTE: This wire is only used if you have an Aftermarket Tachometer.

Obtain the white "COIL->TACH" wire (circuit 121) and route and connect as follows:

If you have an Aftermarket Ignition Module such as an MSD Module, route the white wire to the module and connect to the Tachometer connection of the module.

If you are using a GM style HEI Distributor, terminal "B" and connector "Q" have been provided to make that connection.

If you have a points type Ignition System, route the white wire to the Ignition Coil and connect to the (-) terminal.

Wire # Wire Color Printing Description

121 White COIL->TACH Tachometer feed wire.

STARTER SOLENOID CONNECTIONS (see Figure C on page 16 and Figure D on page 18)

8. Main Fuse Panel Feed

Route the red 12V Battery wire (circuit 2B) which is in the Dash Harness, to the Megafuses (see Figure D on page 18) and cut to length. Use ring terminal and shrink tubing from 510476 kit. Connect as shown on page 18.

Wire # Wire Color Printing Description

2B Red 12V BATTERY Main Power feed to the Fuse Block.

9. Start Circuit Solenoid Wire

Route the purple "STARTER SOLENOID - S" wire (circuit 6) to the Starter Solenoid and cut to length, install sleeve "D" and crimp on ring terminal "K". Connect to the Starter Solenoid S (start) stud.

 Wire #
 Wire Color
 Printing
 Description

 6
 Purple
 STARTER SOLENOID-S
 This is the start circuit.

10. Start Circuit Resistor Bypass Wire

NOTE: For Ignition Systems that have a Ballast Resistor in the Ignition feed to the Ignition Coil, this wire bypasses that resistor during Crank allowing a higher voltage.

Obtain the yellow **Starter Solenoid Resistor Bypass Wiring Jumper Harness "DD"** and attach the ring terminal to the "l" (ignition bypass) terminal of the Starter Solenoid. Route the other end of the yellow wire to the Ballast Resistor and cut to length. Obtain the cutoff section of the large pink wire (circuit 3A from step 5) and double it with the yellow wire, crimp on terminal "C" and insert into connector "E". You can now connect to the Ballast Resistor. The other end of the large pink wire can be routed and connected to the (+) side of your Ignition Coil

 Wire #
 Wire Color
 Printing
 Description

 7
 Yellow
 STARTER SOLENOID-R
 Resistor Bypass Wiring

"DD" Starter Solenoid Resistor Bypass Wiring

Alternator Connections (Figure C)

11. Alternator Output Circuit

Use the 6ga red wire, MegaFuse, boot, ring terminals, and shrink tube from the 510476 kit. Route from the MegaFuse to the alternator cut to length and apply ring terminals, shrink tube, boot then connect per the instructions in the 510476 Alternator and Main Power Connection kit.

 Wire #
 Wire Color
 Printing
 Description

 2
 Red
 (no printing)
 Alternator output wire.

12. Alternator Exciter Wire

NOTE: This brown wire is only used if you have an Aftermarket Alternator that requires an internal Voltage Regulator, and is the exciter wire for your Alternator/Voltage Regulator.


If you are using a 1-wire Alternator (recommended) this brown wire will not be used and should be capped off as it is "hot" when the Ignition Switch is in the "ON or ACC" position.

If not using a 1-wire Alternator, this brown "ALTERNATOR IGN" wire (circuit 4B) in your Dash Harness must be connected to the "Switched or 12V Ignition" terminal on your Voltage Regulator or Alternator according to the manufacturers specifications. An **inline diode or resistor may be necessary** to eliminate "run on" after being switched off. AAW recommends a Ford Gen 3 Internally Regulated or a 1-wire Alternator.

If you are using a GM "SI" Alternator obtain the **GM "SI" Alternator Exciter Wiring Jumper Harness "EE"**. Attach the ring terminal end of the "EE" jumper to the Battery stud of the Alternator. Route the brown wire (circuit 4B) from the Dash Harness to the 2-way connector of the jumper harness "EE". Crimp on terminal "B" to the brown wire and plug into the open cavity of the 2-way connector of the Jumper Harness "EE". Now plug the 2-way connector of the "EE" jumper harness into the "SI" Alternator.

Wire #	Wire Color	<u>Printing</u>	Description
2F	Red	no printing	Alternator Battery stud wire in the GM "SI" Alternator Exciter Wiring Jumper Harness.
4B	Brown	ALTERNATOR IGN	Alternator exciter wire.



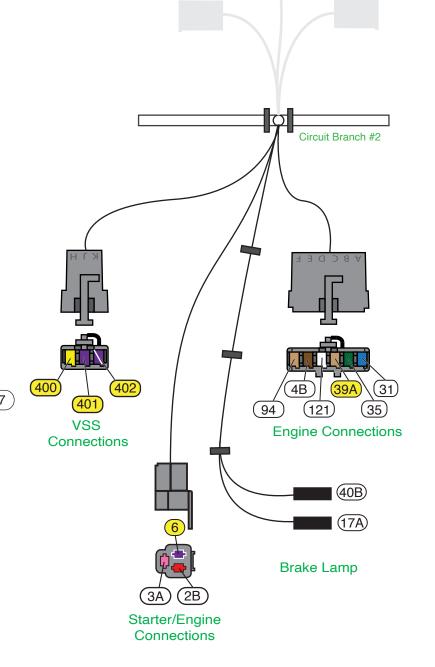



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

Circuit Branch #1 - Under Dash Connections

1. Accessory Connector

Use the provided 6-way empty connector, which is attached to the 6-way Accessory connector on the Dash Harness, and terminals "B" and "C" to add power wires (not provided) for the following optional systems:

Wire #	Wire Color	<u>Printing</u>	Fuse #	Fuse Block Cover	Fuse rating	<u>Description</u>
100	Orange	no printing	7	Hazard	15A	Battery feed for Hazard or Audio Systems.
103	Tan	FUEL PUMP	10	Fuel Pump	20A	Ignition feed for an Electric Fuel Pump.
104	Orange	POWER SEATS	2	Pwr Seats	30A	Battery feed for Power Seats.
105	Red	POWER LOCKS	8	Pwr Locks	20A	Battery feed for Power Locks.
106	Pink	POWER WINDOWS	15	Pwr Window	30A	Accessory feed for Power Windows.
107	Orange	12V BATTERY FUSED	1	Bat-Spare	30A	Battery feed for options.

2. Ground

Attach this black "GROUND" wire (circuit 150) to a good body ground.

Note: Do not attach this ground wire (circuit 150) with the ground wire (circuit 151) in Circuit Branch #4, they should remain separated.

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
150	Black	GROUND	Ground wire

3. Dimmer Switch Connector

Route to the Dimmer Switch 500042 (located in Bag G). Attach the 3-way Dimmer Switch connector to the Dimmer Switch and attach to the Floor Pan.

	Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
	10	Yellow	DIMMER SW FEED	Feed from the Headlight Switch.
l	11A	Light Green	HEADLIGHT-HI BEAM	Feed to the High Beam Headlights.
l	11B	Light Green	HI BEAM INDICATOR LIGHT	Feed to the High Beam Indicator Light in the Instrument Cluster.
	12	Tan	HEADLIGHT-LOW BEAM	Feed to the Low Beam Headlights.
П				

Circuit Branch #2 - Under Dash Connections

1. Turn Flasher Connector

Plug one of the Flashers into this connector.

ı	wire #	wire Color	<u>Printing</u>	<u>Description</u>
l	16A	Purple	TURN SWITCH FEED	12V Ignition feed from the Fuse Block.
ı	16B	Purple	TURN SWITCH FEED	12V feed from the Turn Flasher to the Turn Signal Switch.

2. Horn Relay Connector

Plug the Horn Relay into this connector.


Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
2C	Red	12V BATTERY	Fused 12V Battery feed to the Horn Relay.
28	Black	HORN RELAY GROUND	Relay ground circuit to the Turn Signal Switch for Aftermarket Steering Columns.
28A	Black	HORN RELAY GROUND	Relay ground circuit to the base of the Steering Column for the Horn Switch.
29	Dark Green	HORN	Feed to the Horns.

3. Hazard Flasher Connector

Plug one of the Flashers into this connector (only used with an aftermarket steering column 4-way Hazard Flasher).

Wire #	Wire Color	<u>Printing</u>	Description
27A	Brown	TURN SW-HAZARD	12V Battery feed to the Hazard Flasher.
27B	Brown	TURN SW-HAZARD	12V feed from the Hazard Flasher to the Turn Signal Switch.



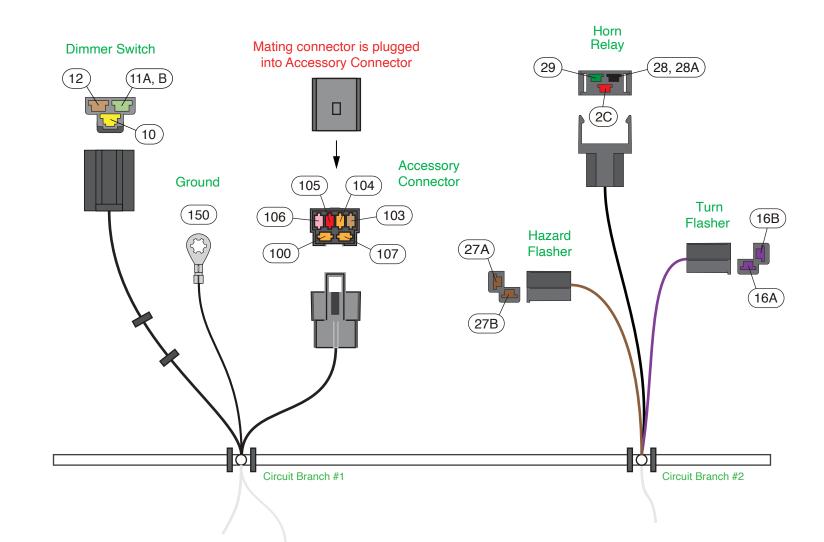



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

Circuit Branch #3 - Under Dash Connections

1. Headlight Switch Connector

Plug this connector to the Headlight Switch 510254.

Note: If you purchase an Aftermarket Retaining Nut to hold your Headlight Switch to the Dash, some Retaining Nuts have a plastic insert inside that may interfere with the installation of your new Headlight Switch Knob and Shaft. If there is interference, it is recommended that you remove this plastic insert from inside your Retaining Nut.

	ioni molao your riotaning real				
Wi	re # Wire Color	<u>Printing</u>	<u>Description</u>		
2A	Red	12V BATTERY	12V Battery feed from the Fuse Block.		
8	Gray	DASH LIGHTS	Dash Light feed to the Cluster.		
9A	Brown	PARK LIGHTS	Feed to the Front Park Lights.		
9B	Brown	REAR RUNNING LIGHTS	Feed to the Rear Tail Lights and the License Light.		
10	Yellow	DIMMER SW FEED	Feed to the Headlight Dimmer Switch for the Headlights.		
400	C Orange	12V BATTERY-FUSED	Fused 12V Battery feed from the Fuse Block.		
401	D Orange	12V BATTERY-FUSED	Fused 12V Battery feed to the LH Door Jamb Switch.		
53	A Light Blue	12V CTSY SW	12V Switched feed to the LH Courtesy Light.		
531	B Light Blue	12V CTSY SW	12V Switched feed to the RH Courtesy Light.		
53I	F Light Blue	12V CTSY SW	12V Switched feed from the LH Door Jamb Switch to the Headlight Switch.		

2. Wiper Switch Connectors with the original Wiper Switch

Obtain the white **Wiper Switch Jumper Wire** "**HH**" and connect this jumper wire to the Wiper Switch Conn #2 in the Dash Harness. Connect the bullet terminal of this jumper to the **B** terminal on the Wiper Switch. Connect the three wires from the Wiper Motor to the Wiper Switch. The 4 wires at the Wiper Switch should be connected as follows:

ac ionerror			
Terminal on Switch	Wire Color		
В	White (AAW)		
F	Green (from Wiper Motor)		
P	Black (from Wiper Motor)		
Α	Red (from Wiper Motor)		

Wire # Wire Color Printing Description

93X White WIPER FEED Fused 12V Accessory feed to the Wiper Switch.

3. Wiper Switch Connectors with an Aftermarket Wiper System

Most Aftermarket Wiper Systems are self contained and only need a 12V feed wire to the Wiper Switch and a separate wire from the Wiper Switch to an Electric Washer Pump. We have provided both wires in the Dash Harness.

Wiper Switch Connector #1

This is the 1-way black connector in the Dash Harness that will connect to an Aftermarket Wiper Switch to provide the feed to a Washer Pump.

Wire # Wire Color Printing Description

94 Tan no printing 12V feed from the Wiper Switch to an Aftermarket Washer Pump.

Wiper Switch Connector #2

Plug this 1-way black connector to the aftermarket Wiper Switch. This is the main 12V power feed for the Wiper System.

Wire # Wire Color Printing Description

93 White WIPER FEED Fused 12V Accessory feed from the Fuse Block to the Wiper Switch.

4. Left Hand Door Jamb Switch Connectors

Route the two male bullet connectors into the Side Cowl and through the Door Jamb Switch Hole (requires a .80" to .85" dia mounting hole, if not already present) and connect to the Door Jamb Switch "Y". Polarity does not matter. You can now install the Door Jamb Switch. Note: If you decide not to include a Door Jamb Switch,

these two bullet terminals should be taped up separately and then taped back to the Dash Harness.

Wire #Wire ColorPrintingDescription40DOrange12V BATTERY-FUSED12V fused Battery feed.53FLight Blue12V CTSY SWFeed to the LH Courtesy Light.

5. Left Hand Courtesy Light

Plug the 2-way Left Hand Courtesy Light Connector, which is part of the Dash Harness, into one of the Under Dash Courtesy Light Wiring Jumper Harnesses "FF".

Attach the Jumper Harness "FF" to the LH lower Outboard IP. NOTE: This Courtesy Light utilizes a #631 Bulb (which is not included in this kit).

Wire # Wire Color Printing Description


53A, C Light Blue 12V CTSY SW 12V Switched feed to the LH Courtesy Light.

156A White CTSY GROUND LH Courtesy Light ground. Attach this ring terminal to a good ground.

6. Rear Body Connector

This 9-way connector will plug into the 9-way connector of the Rear Body Harness Kit **510654** (kit located in **Bag M**). Some of the Rear Body Harness Kit wires will route through Grommet "**F**", and then down the Firewall and to the rear of the vehicle along the LH Frame Rail. See the Rear Body Harness Kit for more details.

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
9B	Brown	REAR RUNNING LIGHTS	Feed for the License Light and the Rear Running Lights.
17B	Light Blue	THIRD BRAKE LIGHT	Feed for an aftermarket Third Brake Light.
18	Yellow	LEFT REAR TURN	Feed to the Left Rear Stop and Turn Light.
19	Dark Green	RIGHT REAR TURN	Feed to the Right Rear Stop and Turn Light.
24	Light Green	BACK UP LT SW ® LIGHTS	Feed from the Backup Light Switch to the Backup Lights if so equipped.
30	Tan	GAS GAUGE	Fuel Tank Sender.
40A, E	Orange	12V BATTERY-FUSED	12V Fused Battery feed for Aftermarket LED Tail Lights.
53C	Light Blue	12V CTSY SW	12V Switched feed for the Dome Light and any Interior Courtesy Lights.

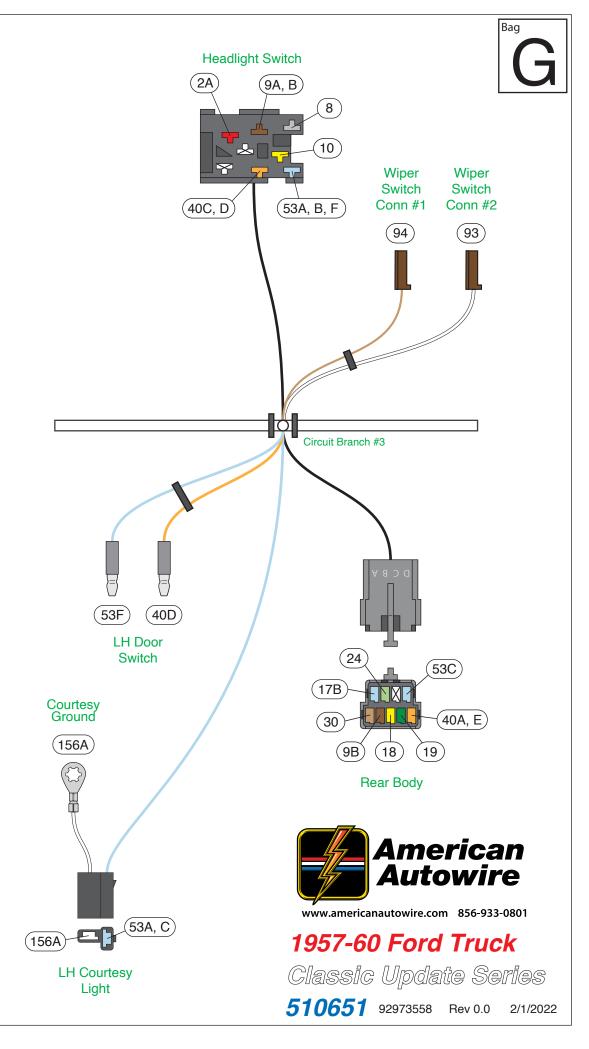

Circuit Branch #4 - Under Dash Connections

Instrument Cluster Connections

These connectors will plug to the connectors of the Gauge Cluster Kit 510653 (located in Bag H).

1. Cluster Connector "A"

Wire # Wire Color **Printing Description** Brown ALTERNATOR IGN 12V Ignition Accessory feed. DASH LIGHTS Headlight feed for the Cluster Illumination Lights. 8, 8A Gray 12V IGNITION 12V Fused Ignition feed. 39B, C Pink

150 GROUND Cluster ground. Black

2. Cluster Connector "B"

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
11B	Light Green	HI BEAM INDICATOR LIGHT	Feed to the High Beam Indicator Light.
14B	Light Blue	LEFT DASH IND	Feed for the Left Turn Signal Indicator Light.
15B	Dark Blue	RIGHT DASH IND	Feed for the Right Turn Signal Indicator Light.
30	Tan	GAS GAUGE	Fuel Gauge Signal from the Fuel Tank Sending Unit.
31	Dark Blue	OIL PRESSURE SENDER	Oil Pressure Sender Signal from the Engine.
33	Tan	BRAKE LIGHT/SWITCH	Brake Warning Light Signal to ground.
35	Dark Green	WATER TEMP SENDER	Water Temperature Sender Signal from the Engine.
121	White	COIL>TACH	Tachometer feed to the Ignition Coil.

3. Cluster Connector "C"

This connector contains the wires for an Aftermarket Electric Speedometer. NOTE: Wires "400" and "401" must remain twisted together.

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
139	Pink/White	SPEEDO POWER	Fused 12V Ignition feed for the Electric Speedometer.
151	Black/White	SPEEDO GROUND	Electric Speedometer Ground.
400	Yellow	VSS GROUND	Vehicle Speed Sensor Ground.
401	Purple	VSS SIGNAL	Vehicle Speed Sensor Signal.
402	Purple/White	VSS POWER	Vehicle Speed Sensor Power.

Ignition Switch Connectors

4. Ignition Switch Connections

Attach each of the ring terminals to the appropriate stud on the Ignition Switch Assembly 510655 as noted below.

"	O. 1		
Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
2D	Red	12V BATTERY	12V Battery feed. Attach to the "BAT" stud of the Ignition Switch.
3B	Pink	IGNITION FEED	12V Ignition feed from the Ignition Switch. Attach to the "IGN" stud of the Ignition Switch.
4A	Brown	IGNITION SW ACCY	12V Accessory feed from the Ignition Switch. Attach to the "ACC" stud on the Ignition Switch.
4C	Brown	ALTERNATOR IGN	Same as 4A.
5	Purple	NEUTRAL SAFETY SWITCH	Start feed to the Neutral Safety Switch or to the purple Starter Solenoid wire (circuit 6). Attach to the "ST" stud of
			the Ignition Switch.

Note: Your Ignition Switch Assembly does not include a Bezel and you will have to use your original or purchase one from an Aftermarket Supplier.

5. Cigarette Lighter Connector

Connect the Cigar Lighter female bullet connector to the Cigar Lighter.

Wire # Wire Color **Printing Description** 40

Orange 12V BATTERY-FUSED Fused 12V Battery feed to the Cigar Lighter.

6. Dash Light Candelabra

This 3-way female bullet connector provides a connection point for any Illumination Light feed that may be required, such as to the Radio, the Ash Tray Light, the Clock, the Heater Switch or any Aftermarket Gauges. This is the same circuit as the Instrument Cluster Illumination Lights and will dim when the Headlight Dimmer Switch Knob is rotated clockwise. Extra wire length of the gray "DASH LIGHTS" wire (circuit 8) is available in the Cluster Kit 510653 in Bag H. Also, large male bullet terminals "A" and large sleeves "D" (to plug into the Candelabra Connector) are available for this application.

Wire # Wire Color **Printing Description** DASH LIGHTS Gray Dash Lights feed wire.

7. Aftermarket Electric Speedo Ground


Attach this wire to a good body ground.

Note: Do not attach this ground wire (circuit 151) with the ground wire (circuit 150) in Circuit Branch #1, they should remain separated.

Wire # Wire Color **Printing Description**

SPEEDO GROUND 151 Black/White Ground for an Aftermarket Electric Speedometer.

Page 11

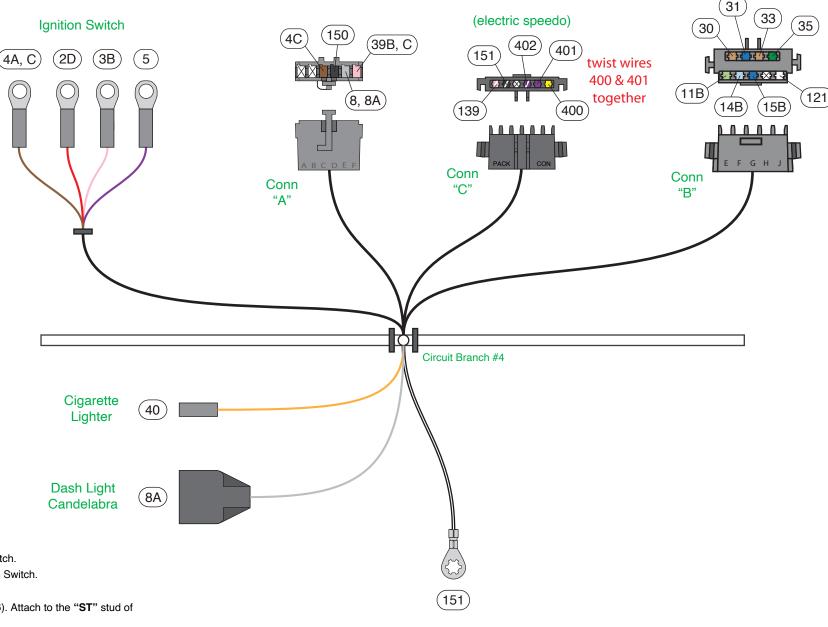

Ground

Cluster Connections





www.americanautowire.com 856-933-0801

1957-60 Ford Truck





Circuit Branch #5 - Under Dash Connections

The Backup and Neutral Safety Switch Wires

NOTE: These wires are coiled up.

For both a Manual transmission and an Automatic Transmission, route the light green Backup Light/Switch wire (circuit 24) and the pink 12 Volt Ignition wire (circuit 39C) to the Backup Light Switch and connect. Polarity doesn't matter.

If you have a Manual Transmission, you will need to connect the purple Neutral Safety Switch wire (circuit 5) and the purple Starter Solenoid wire (circuit 6) together.

If you have an Automatic Transmission, route the purple Neutral Safety Switch wire (circuit 5) and the purple Starter Solenoid wire (circuit 6) to the Neutral Safety Switch and connect. A typical connection for the Neutral Safety/Backup Switch can be found on page 17 Figure "D".

NOTE: If circuit 5 and circuit 6 are not connected, your Starter Solenoid will not engage, and your Engine will not crank.

1. Backup and Neutral Safety Switch Connections

Wire #	Wire Color	<u>Printing</u>	<u>Description</u>
5	Purple	NEUTRAL SAFETY SWITCH	Start feed from the Ignition Switch to the Neutral Safety switch or to circuit 6.
6	Purple	STARTER SOLENOID-S	Start circuit from the Neutral Safety Switch or circuit 5 to the Starter Solenoid.
24	Light Green	BACK UP LT SW->LIGHTS	Feed from the Backup Light Switch to the Backup Lights.
39C	Pink	12V IGNITION	12V feed to the Backup Light Switch.

Turn Signal Switch Preparation

For all of the vehicles, the Turn Signal Switch is mounted to the Steering Column. You can continue to use this original Turn Signal Switch or you can replace it with an Aftermarket Turn Signal Switch.

If you are using the original Turn Signal Switch (or an Aftermarket Turn Signal Switch) you will have to remove the original connector (and terminals) and replace them with the 14-way connector "BBB", and terminals "AAA" (see Dash Harness Loose Piece Kit 92973542 for parts). Cut the original connector from the pigtail as close as possible to the original connector allowing maximum wire length, crimp on terminals "AAA" and plug into connector "BBB" (see Diagram 'A' and "Table A" on page 14 for wire location and functional description of the circuits).


If you are using an Aftermarket Steering Column it may have the proper 14-way Pack con connector already attached to the Turn Signal Switch Pigtail. If so, you can plug the Dash Harness 11-way connector directly into the Turn Signal Switch. If not, then add terminals "AAA" and connector "BBB" to the Turn Signal Switch.

2. Turn Signal Switch Connector

Once you have modified the Turn Signal Switch Pigtail by adding the black 14-way male connector, plug the 11-way Turn Signal Switch Connector, which is part of the Dash Harness, to the 14-way connector of the Turn Signal Switch.

Wire #	Wire Color	<u>Printing</u>	Description
14A,	Light Blue	LEFT FRONT TURN	Left Front Turn Signal feed.
14B	Light Blue	LEFT DASH IND	Feed to the LH Turn Signal Indicator.
15A,	Dark Blue	RIGHT FRONT TURN	Right Front Turn Signal feed.
15B	Dark Blue	RIGHT DASH IND	Feed to the RH Turn Signal Indicator.
16B	Purple	TURN SWITCH FEED	Turn Signal Switch feed from the Turn Signal Flasher.
17A	White	BRAKE SW	Brake Switch feed to the Turn Signal Switch.
17B	Light Blue	THIRD BRAKE LIGHT	Feed to the Third Brake Light.
18	Yellow	LEFT REAR TURN	Feed to the Left Rear Turn Signal Light.
19	Dark Green	RIGHT REAR TURN	Feed to the Right Rear Turn Signal Light.
27B	Brown	TURN SW – HAZARD	Feed from the Hazard Flasher.
28	Black	HORN RELAY GROUND	Ground from the Horn Relay to the Horn Switch.

Backup / Neutral Safety Switch

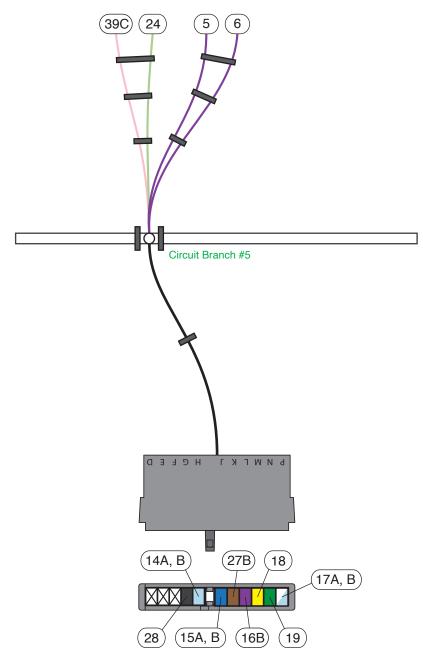

Turn Signal Switch



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series





Circuit Branch #6 - Under Dash Connections

Heater Systems (see Figures "E" and "F" on page 17)

"GG" Heater Switch to Blower Motor, Standard Heater

This kit provides wiring for two different Heater Systems (Standard and Deluxe).

Heater Switch Feed Wire

The same Heater Switch is used for both systems. The terminals on the Heater Switch are identified as B = 12V feed, H = High Speed, and L = Low Speed. Connect the brown wire (circuit 50) from the Dash Harness to the B terminal of your Heater Switch.

Wire # Wire Color **Printing Description**

HEATER/AC FEED Brown 12V fused B+ feed from the Fuse Block.

1. The Standard Heater System (see Figure "E")

Connect the Heater Switch to Blower Motor, Standard Heater "GG" Jumper Harness, to the Heater Switch and to the Blower Motor as shown in Figure "E" on page 17.

Wire # Wire Color Printing Description 51X Red no printing Heater Switch to Blower Motor Low Speed. 52X Orange no printing Heater Switch to Blower Motor High Speed.

2. The Deluxe Heater System (see Figure "F")

Connect the Heater Switch to Blower Motor, Deluxe Heater "JJ" Jumper Harness to the Heater Switch, the Blower Motor Resistor, and to the Blower Motor as shown in

Figure "F" on page 17. Wire # Wire Color

Heater Switch Low Speed to Blower Motor Resistor. 51Y Red no printing Heater Switch High Speed to Blower Motor Resistor. 52Y Orange no printing 52Z Orange no printing Voltage feed from Blower Motor Resistor to Blower Motor.

NOTE: Terminals H and M, and sleeves J, have been provided if you need to replace the original terminals on the Blower Motor pigtail wires. Make sure the black wire from your Blower Motor is connected to a good vehicle ground.

Circuit Branch #7 - Under Dash Connections

1. Radio/Clock Wires

These wires are provided for your Radio/Clock.

Wire # Wire Color **Printing** Description 12V Fused Accessory Feed to the Radio for "On/Off" power. Tan 99 Yellow **CLOCK BAT** 12V Fused Battery Feed for a Clock or for Radio Memory.

Circuit Branch #8 - Under Dash Connections

1. Glove Compartment Light Connector

Plug the orange female bullet Glove Box Light connector to the Glove Box Switch/Light Pigtail.

Wire # Wire Color

12V BATTERY - FUSED 40E, F Orange 12V Battery feed to the Glove Compartment Light.

2. Right Hand Courtesy Light

Plug the 2-way Right Hand Courtesy Light Connector, which is part of the Dash Harness, into one of the Under Dash Courtesy Light Jumper Harnesses "FF". Attach the Jumper Harness "FF" to the RH lower Outboard IP. NOTE: This Courtesy Light utilizes a #631 Bulb (which is not included in this kit).

Printing Wire # Wire Color **Description**

12V Switched feed to the RH Courtesy Light. 53B, G Light Blue 12V CTSY SW

CTSY GROUND 156B White RH Courtesy Light ground. Attach this ring terminal to a good ground.


3. Right Hand Door Jamb Switch Connectors

Route the two male bullet connectors into the Side Cowl and through the Door Jamb Switch Hole (requires a .80" to .85" dia mounting hole, if not already present) and connect to the Door Jamb Switch "Y". Polarity does not matter. You can now install the Door Jamb Switch. Note: If you decide not to include a Door Jamb Switch, these two bullet terminals should be taped up separately and then taped back to the Dash Harness.

Wire # Wire Color **Printing Description** 40F Orange 12V BATTERY-FUSED 12V fused Battery feed. 53G 12V CTSY SW Feed to the RH Courtesy Light. Light Blue

(52Z) (52Y, Z (52Y)

"JJ" Heater Switch to Blower Motor, Deluxe Heater

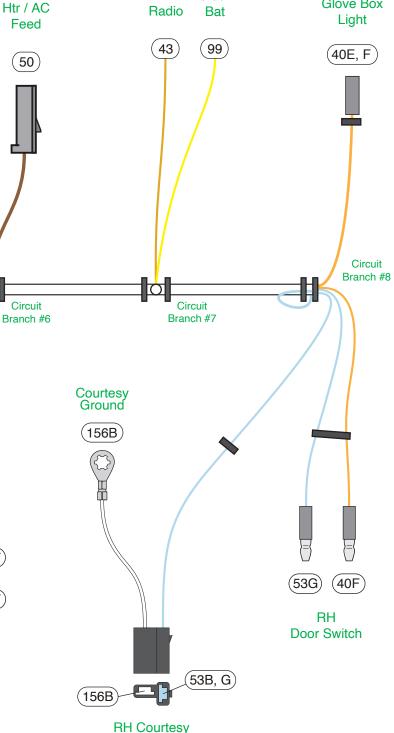

Light

Clock


Glove Box



www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

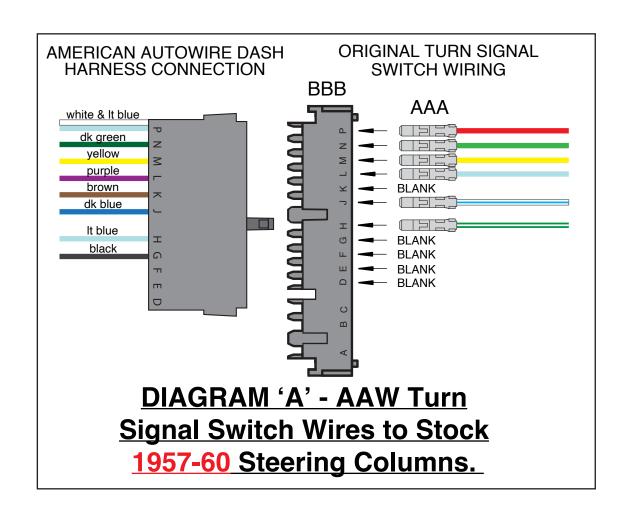


"Table A"



AAW Turn Signal Switch wires to stock 1957-60 Ford Truck

AAW Wire #	AAW Wire Color	AAW Wire Printing	Connector Cavity	Ford Wire Color
VVII C #	<u>wire Color</u>	viile i illitilig	Cavity	I OIG VVIIE COIDI
17A,B	White & Light Blue	Brake SW & Third Brake Light	Р	Red
19	Dark Green	Right Rear Turn	N	Green
18	Yellow	Left Rear Turn	M	Yellow
16B	Purple	Turn Switch Feed	L	Light Blue
27B	Brown	Turn SW - Hazard	K	None
15A,B	Dark Blue	Right Front Turn & Right Dash Indicator	J	White with Blue Stripe
14A,B	Light Blue	Left Front Turn & Left Dash Indicator	Н	Green with White Stripe
28	Black	Horn Relay Ground	G	None
None	None	None	F	None
None	None	None	Е	None
None	None	None	D	None

NOTE: For all of the vehicles, the Steering Column Horn Button switches ground for a Horn Relay, which then switches power to the Horns, similar to the AAW design. Wire 27B is being provided if an Emergency Warning Flasher System is to be added. Wire 28 is being provided if an aftermarket steering column has horn switch ground provisions in the steering column.

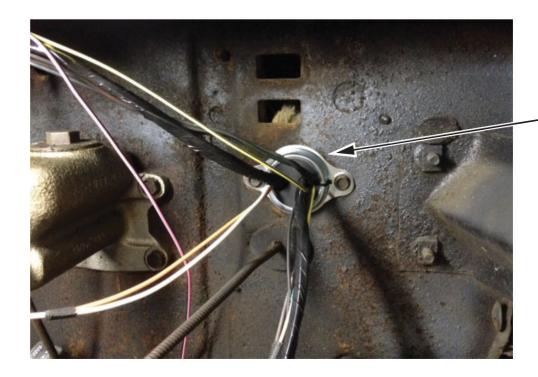

Firewall grommet "F" and metal retainer (metal retainer is not included in this kit)


Photo is of a 1960 F-100 Custom Cab






1957-60 Ford Truck

Classic Update Series

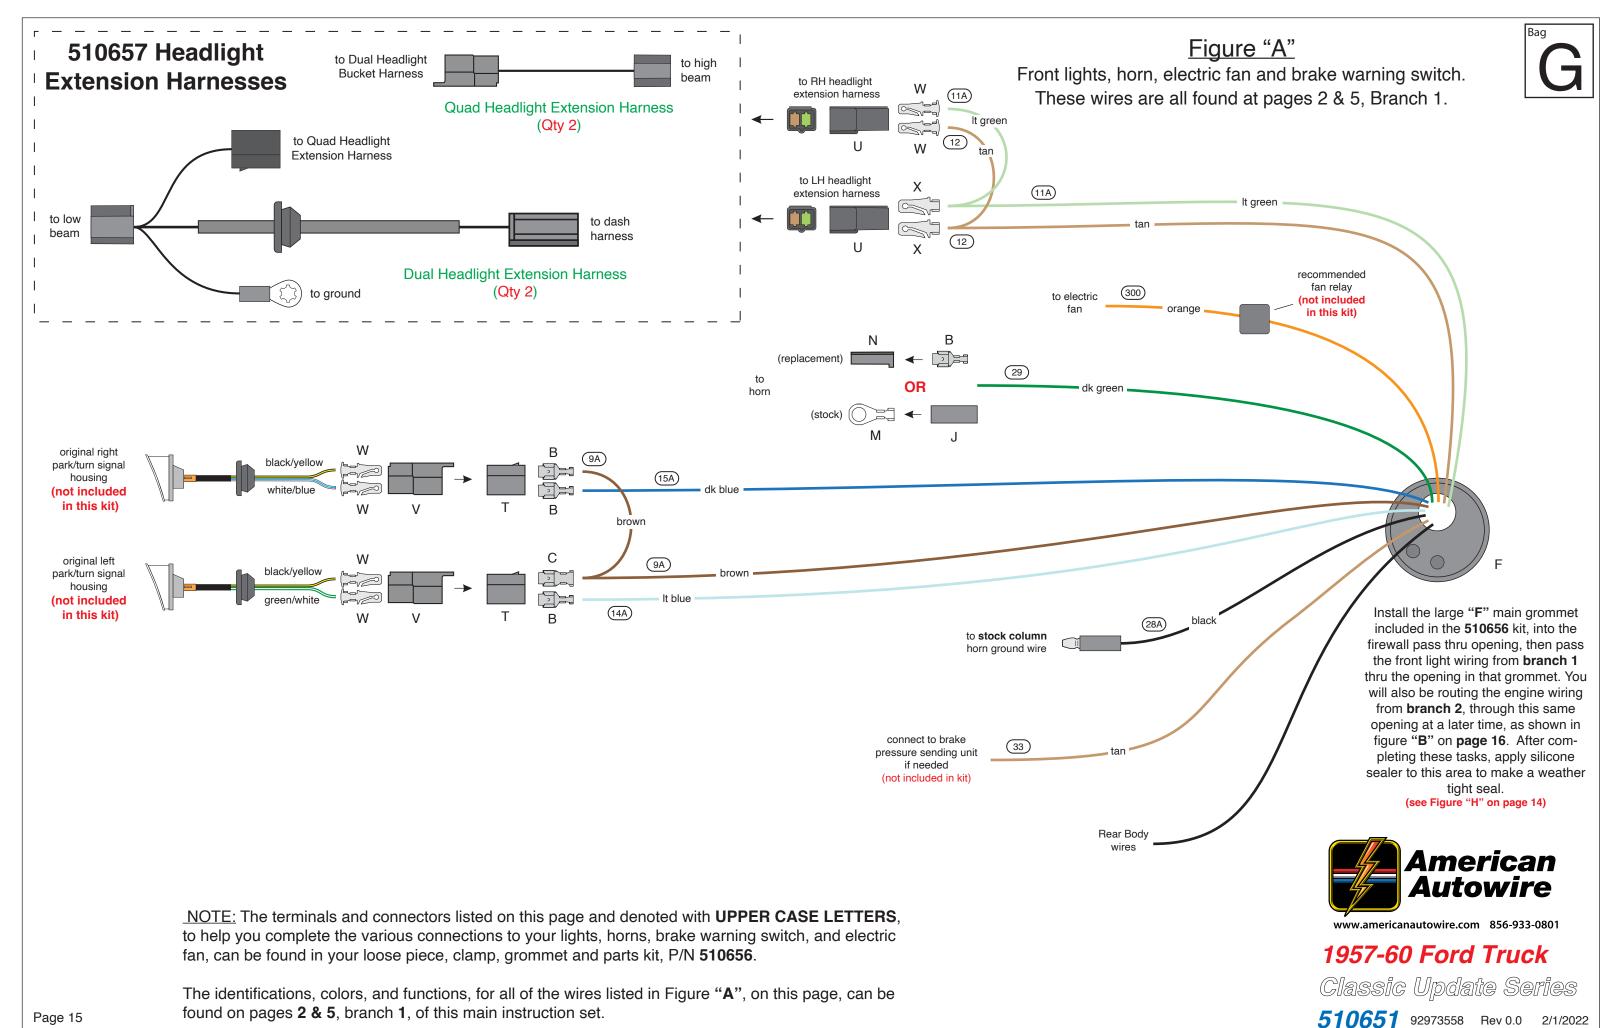

Page 15

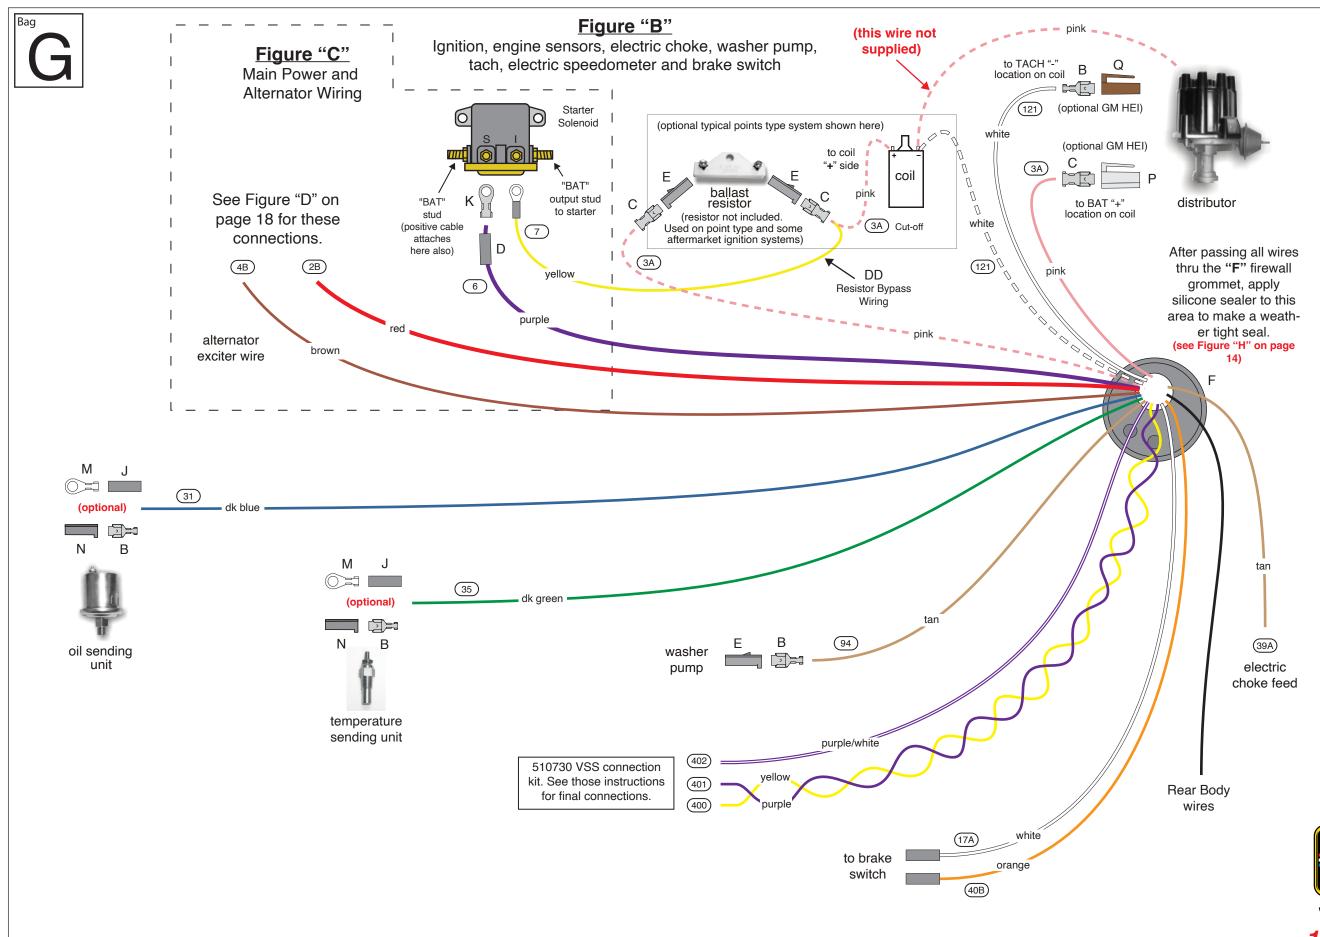

NOTE: The terminals and connectors listed on this page and denoted with UPPER CASE LETTERS, to help you complete the various connections to your ignition feed, engine sensors, electric choke, tachometer, washer pump, brake switch, electric speedometer, and alternator output, can be found in your loose piece, clamp, grommet and parts kit, P/N 510656.

The identifications, colors, and functions, for all of the wires listed in Figure "B" and Figure "C", on this page, can be found on pages 7 and 8, branch 2, of this instruction set.


AAW kits are all engineered to be used in conjunction with a high output, later model internally regulated, or one wire alternators. We do not suggest or support the use of a stock, low amperage generator or alternator, as they do not supply sufficient current to recharge the battery in a highly modified truck such as this kit was designed for. AAW suggests a Ford Gen III (3G), a GM "SI", or a 1 wire type alternator as good choices to use. An adpater to complete the connection to the Ford Gen III (3G) style alternator (AAW p/n 500802) may be purchased separately. Contact AAW for your needs.




www.americanautowire.com 856-933-0801

1957-60 Ford Truck

Classic Update Series

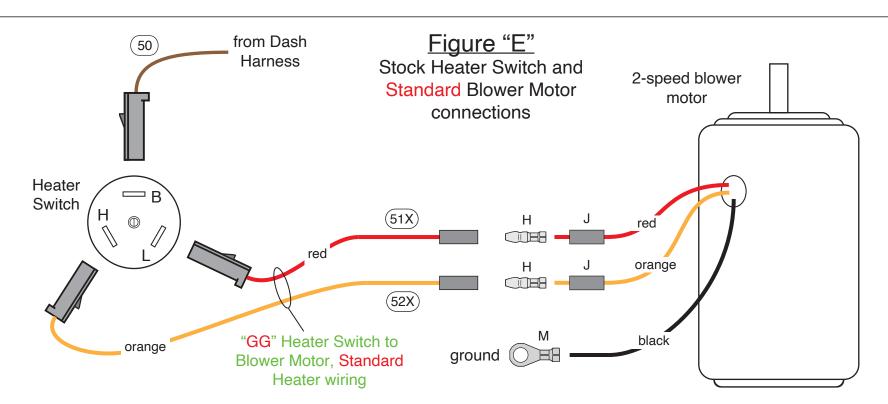

This AAW kit is engineered to work with most aftermarket manufacturer's heating and air conditioning systems. As such, we have provided a keyed 12-volt feed to use as the "OFF / ON" (AAW brown 50 wire) power source for whatever system you choose to purchase. The manufacturer will supply you with a harness for their system and instructions on how to connect it. In the event you are utilizing a stock heater system in your truck, we have also provided wires that will run from your heater switch to your heater motor. See Figure "E" above for complete installation instructions.

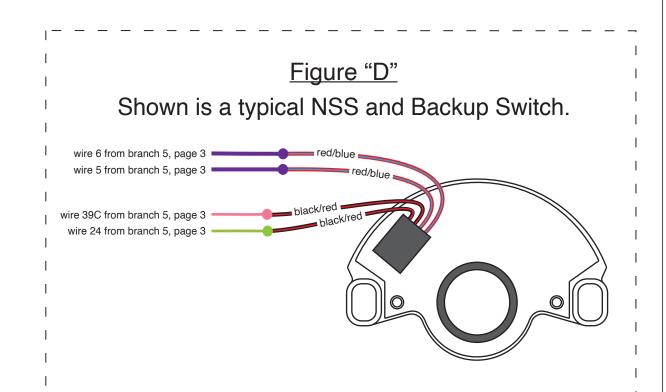

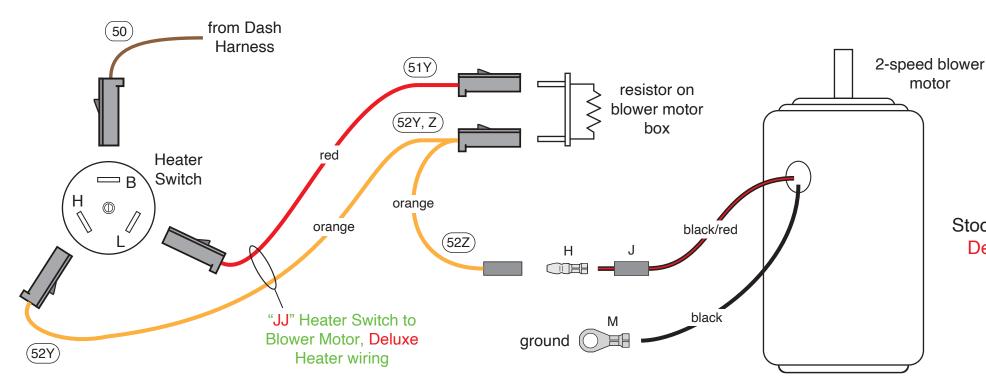


Figure "F" Stock Heater Switch and **Deluxe** Blower Motor connections

This AAW kit is engineered to work with most aftermarket manufacturer's heating and air conditioning systems. As such, we have provided a keyed 12-volt feed to use as the "OFF / ON" (AAW brown 50 wire) power source for whatever system you choose to purchase. The manufacturer will supply you with a harness for their system and instructions on how to connect it. In the event you are utilizing a stock heater system in your truck, we have also provided wires that will run from your heater switch to your heater motor. See Figure "F" above for complete installation instructions.



www.americanautowire.com 856-933-0801


1957-60 Ford Truck

Classic Update Series



FUSE LOCATIONS

NOTE: This is an image of the completed Fuse Block assembly, depicting the proper location for the installation of each fuse.

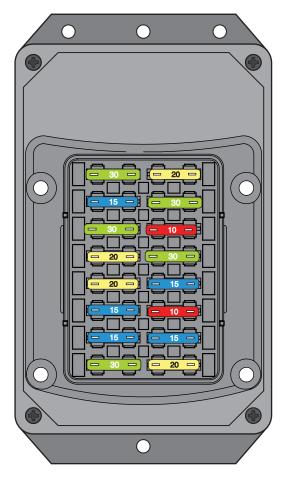

Batt - Spare	9 Wiper
30A - BAT	20A - ACC
Clock/Radio 2	10 Heat/AC 30A - ACC
Power Seat	11 Radio
30A - BAT	10A - ACC
Cigar - Lighter 4	12 Engine Fan 30A - ACC
Power Locks	13 Turn
20A - BAT 5	15A - IGN
Stop/Courtesy	14 Gauges, B/U
15A - BAT 6	10A - IGN
Hazard 7	15 Elec. Choke
15A - BAT	15A - IGN
Pwr. Window	16 Fuel Pump
30A - IGN 8	20A - IGN

Fuse label on inside of Fuse Block cover

Figure "G"

Figure "D" Main Power and Alternator Wiring	Use the Mega Fuse, ring terminals, boot and shrink tubing from the 510476 kit.	6 GA. RED (FROM 510476 KIT)
	ATOR BOOT 6 GA. RED (FROM 510476 KIT) B EE GM "SI" jumper	Red 2B wire from Figure "C" on page 16. Brown 4B wire from Figure "C" Brown 4B wire from Figure "C" ON PAGE 16

Fuse #	Fuse Block Cover Label	Fuse Rating	Description	
1	Bat-Spare	30A	Battery feed for Headlight relays.	
2	Clock - Bat	15A	Battery feed for a Clock and a Radio.	
3	Power Seats	30A	Battery feed for optional Power Seats.	
4	Cigar Lighter	20A	Battery feed for the Cigarette Lighter.	
5	Pwr Locks	15A	Battery feed to Power Locks. Fog sw.	
6	Stop / Courtesy	15A	Battery feed for Brake Lights, Dash Lights, Courtesy and Dome Lights, to Rear Body Harness for options and the Glove Box Light.	
7	Hazard	15A	Battery feed for optional Hazard Lights and optional battery feed.	
8	Power Window	30A	Ignition feed for optional Power Windows.	
9	Wiper	20A	12V Accessory feed for Wiper/Washer system.	
10	Heat / AC	30A	12V Accessory feed for Heater/AC System.	
11	Radio	10A	12V Accessory "on-off" feed to Radio.	
12	Engine Fan	30A	12V Accessory for an optional Electric Fan System, Relay key-on trigger	
13	Turn	15A	Ignition feed for the Turn Signals.	
14	Gauges, B/U	10A	Ignition feed for Dash Gauges/Warning Lights and Back-up Lights.	
15	Electric Choke	15A	Ignition feed for an Electric Choke,	
16	Fuel Pump	20A	Ignition feed for an Electric Fuel Pump and optional Electronic Speedometer System.	



www.americanautowire.com 856-933-0801

1957-60 Ford Truck



"J" Clamps

One "J-Clamp" (see page 2) has been provided to retain the cluster kit wiring in place. Remove the original "J-Clamp" from the cluster and replace with the "J-Clamp" item "T" (see photograph on page 6).

Splice Clips

Splice Clips (item "U" on page 2) have been provided for the circuit 8 and circuit 39 splices (see page 3). Each splice clip can have a maximum of four 18 gauge wires in, and four 18 gauge wires out. Be sure to tape over each splice after splicing the circuits together.

Connector E - This connector will plug into the mating connector A of the dash harness. Connect the wires as follows:

Wire Color Printing Description

1. 12V Ignition Feed

Pink 12V IGNITION This wire is used to provide ignition voltage to the oil pressure warning light (see page 3) or any aftermarket gauges or a brake warning light that you may add. Obtain the pink "12V IGNITION" wire (circuit 39) and route the wire to the oil pressure warning light, cut to length, slide on the 2-way light socket "G" and spring "J" and crimp on terminal "H".

If you are adding aftermarket gauges or a brake warning light, you will have to splice in sections of the same pink wire (use splice clip "U") that you just cut (see page 3). Route these pink wires and connect to all of the associated device(s).

2. Dash Illumination Lights

GrayDASH LIGHTS

This wire will require an in-line splice of the wires (use splice clip "U") to accommodate each of the two dash lights (see page 3). Obtain the gray "DASH LIGHTS" wire (circuit 8) which is located in **connector** "E" and cut to length, splice in sections of the same gray wire that you just cut. Route these gray wires to the two dash light locations, cut each to length, slide on light socket "M", and crimp on terminal "H".

3. Ground

Black GROUND Obtain the black "GROUND" wire (circuit 150) which is located in connector "E" (see page 3). Route this wire to the Constant Voltage Regulator (CVR) (see photo on page 6), cut to length and crimp on ring terminal "Q". Attach the ring terminal to the screw that attaches the CVR to the cluster housing. Make sure that you have a good path to ground.

4. 12V Accessory Feed to the CVR

Brown no printing Obtain the brown wire (circuit 4) which is located in **connector** "E" (see page 3). Route this wire to the input side of the CVR, cut to length, install terminal "O" and plug into **connector** "N", now connect to the CVR. Take the cut off portion of the wire and slide on sleeve "P", then install terminal "L", slide "P" over "L" and connect to the output side of the CVR. Route the other end of the wire to the temperature gauge, cut to length and install a ring terminal supplied from the **Gauge Terminal Kit 92965220**. Make a separate jumper wire using the ring terminals from the gauge terminal kit to supply power to the fuel gauge. Attach all of the ring terminals to the gauges with the included 10-32 locknuts.

Connector D - This connector will plug into the mating connector B of the dash harness. Connect the wires as follows:

Wire Color Printing Description

1. Left Turn Light

Light Blue LEFT DASH IND This wire is for your left turn signal indicator light. Obtain the light blue "LEFT DASH IND" wire (circuit 14) which is located in connector "D" (see page 3), route to the left turn signal light, cut to length, slide on light socket "M", and crimp on terminal "H".

2. Right Turn Light

Dark Blue RIGHT DASH IND This wire is for your right turn signal indicator light. Obtain the dark blue "RIGHT DASH IND" wire (circuit 15) which is located in connector "D" (see page 3), route to the right turn signal light, cut to length, slide on light socket "M", and crimp on terminal "H".





page 2

3. High Beam Indicator Light

Wire Color Printing Description

Light Green HI BEAM INDICATOR LIGHT This wire is for your high beam indicator light. Obtain the light green "HI BEAM INDICATOR LIGHT" wire (circuit 11) which is located in connector "D" (see page 3), route to the high beam indicator light, cut to length, slide on light socket "M", and crimp on terminal "H".

4. Temperature Gauge

Dark Green WATER TEMP SENDER This wire is for your coolant temperature gauge. Obtain the dark green "WATER TEMP SENDER" wire (circuit 35) which is located in connector "D" (see page 3), route to the coolant temperature gauge, cut to length, install a ring terminal from the gauge terminal kit, and attach to the coolant temperature gauge using a supplied 10-32 locknut. See the photograph on page 6 for the location of the wires on the temperature gauge.

5. Fuel Gauge

Tan GAS GAUGE This wire is for your fuel gauge. Obtain the tan "GAS GAUGE" wire (circuit 30) which is located in connector "D" (see page 3), route to the fuel gauge, cut to length, install a ring terminal from the gauge terminal kit, and attach to the fuel gauge using a supplied 10-32 locknut. See the **photograph on page 6** for the location of the wires on the fuel gauge.

6. Oil Pressure Warning Light

Dark Blue OIL PRESSURE SENDER This wire is for your oil pressure warning light. Obtain the dark blue "OIL PRESSURE SENDER" wire (circuit 31) which is located in connector "D" (see page 3), route to the oil pressure warning light, cut to length, crimp on terminal "K" and insert into the 2-way light socket "G".

7. Brake Warning Light

Tan BRAKE LIGHT/SWITCH This wire is only used with an aftermarket brake warning light. Obtain the loose tan "BRAKE LIGHT/SWITCH" wire (circuit 33) and plug it into connector "D" (see page 3). Route the other end of this wire to the aftermarket brake warning light, cut to length and connect to the ground side of the brake warning light. When this wire goes to ground, the brake warning light will illuminate. Here are two possible ways that this wire can go to ground:

A. If you upgrade your brake system and add a brake pressure differential warning switch (see the dash harness sssembly instructions **92971610**). This wiring to the brake pressure differential warning switch is included in the dash harness.

B. If you splice in a cutoff portion of the tan wire "BRAKE LIGHT/SWITCH wire to this tan wire (circuit 33), and then connect the other end of the tan wire to an aftermarket park brake switch.


9. Tachometer

White COIL --> TACH This wire is only used with an aftermarket tachometer. Obtain the loose white "COIL --> TACH" wire (circuit 121) and plug it into connector "D" (see page 3). Route the other end of this wire to the aftermarket tachometer, cut to length, and install onto your tachometer pulse location per the tachometer manufacturers recommendations.

Connector F - This connector will plug into the mating connector C of the dash harness, see page 5 for typical electric speedometer connections.


This connector is only used when using an aftermarket electric speedometer. Follow the manufacturer's instructions when installing these wires.

For typical aftermarket gauge connections, see page 4.

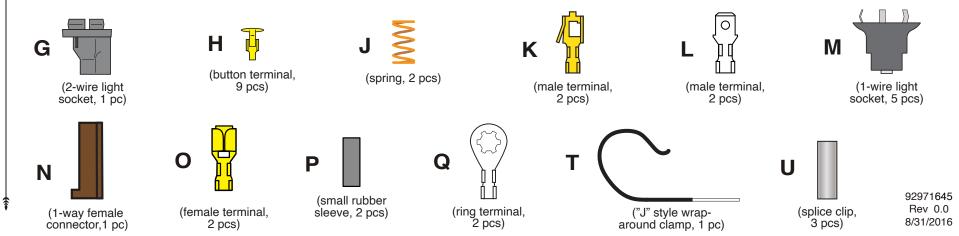


eries Update

page 3

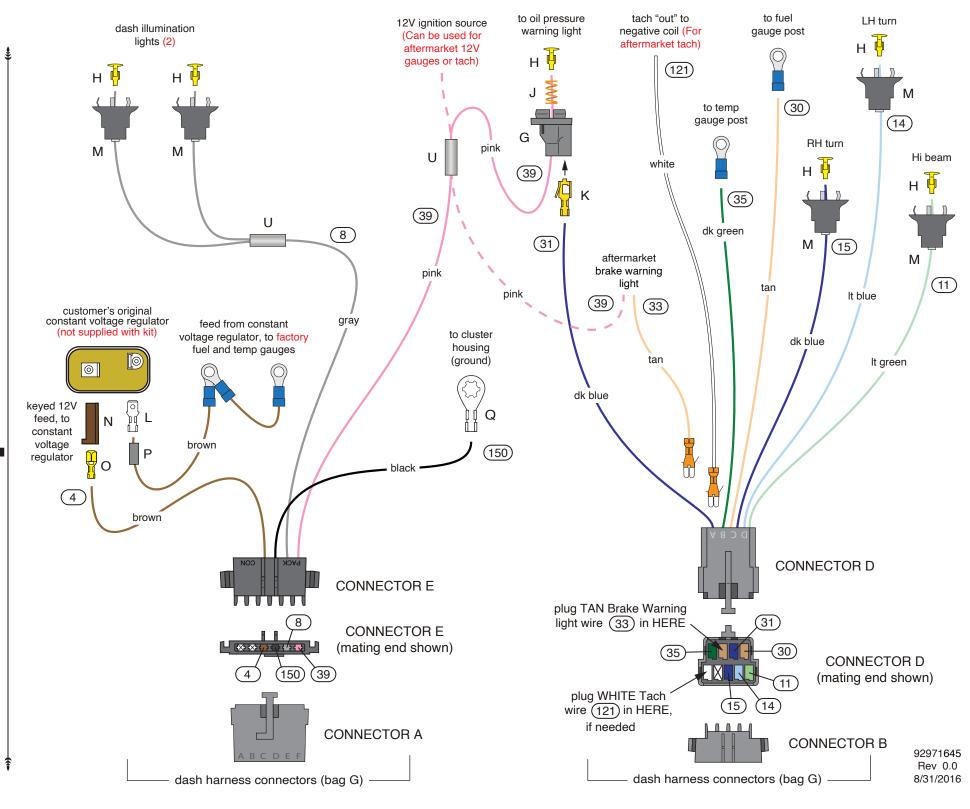

Update Series

TYPICAL AFTERMARKET GAUGE CONNECTIONS (BLADE TYPE CONNECTIONS SHOWN)

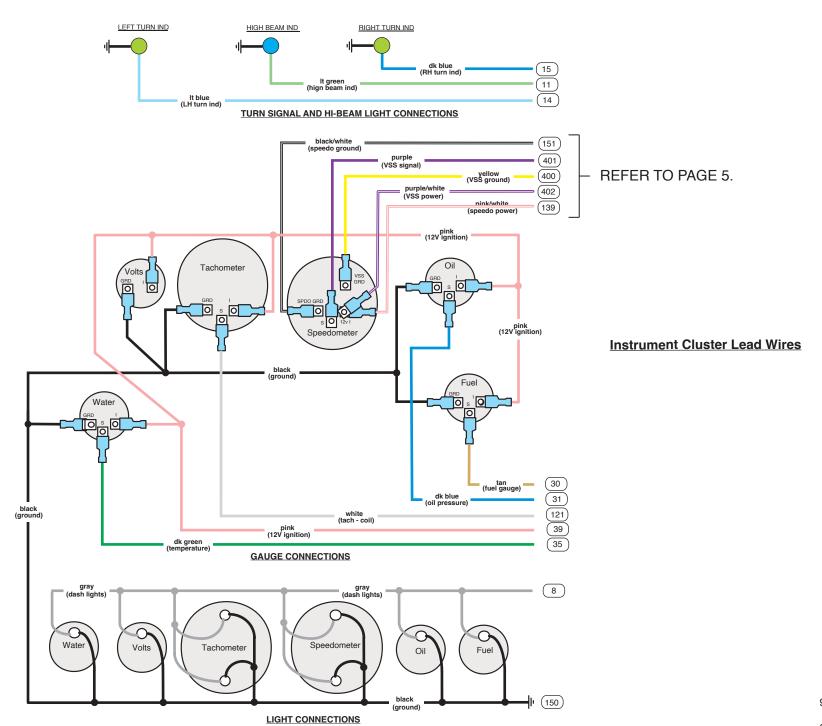

Serie Update

402 401 139 151 400 black/ purple white purple/ pink/ white yellow white **CONNECTOR F CONNECTOR F** (mating end shown) CONNECTOR C dash harness connector (bag G)

TYPICAL ELECTRIC SPEEDO CONNECTIONS

Below are some general instructions for hooking up an electric speedometer. This connector and these instructions will ONLY be used in the event that you are utilizing an aftermarket electric speedometer. If your car does NOT have an electric speedometer, this connection will NOT be used and should not be plugged onto your dash harness. It is best to consult the speedometer manufacturer's instructions if you have any questions.

Yellow VSS Ground Connect to VSS "-" on speedometer.

Purple VSS Signal Connect to VSS input on speedometer.


Purple/White VSS Power Connect to 12V power on speedometer.

Black/White Speedo Ground Connect to ground on speedometer.

Pink/White Speedo Power Connect to 12v power on speedometer.


NOTE: This wire will double onto the same stud as the purple/white VSS power wire

from above.

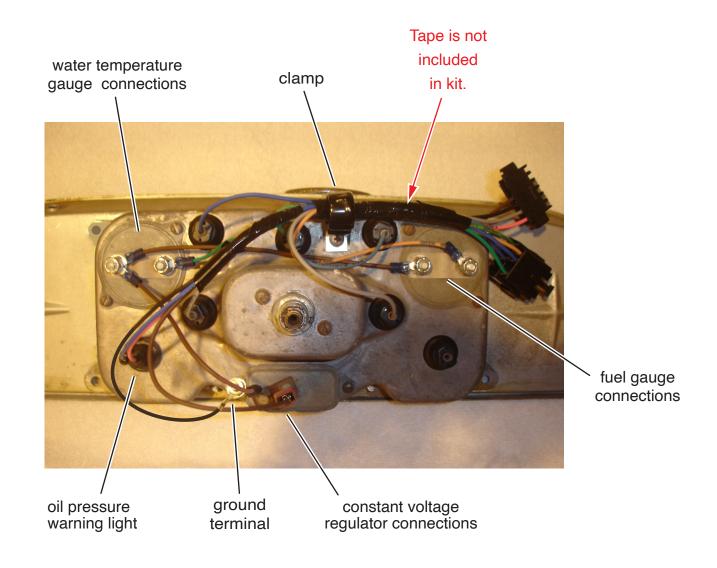

Photograph is of a typical 1957-60 Ford Truck instrument cluster; wiring-side

Electric Speedo VSS extension connection:

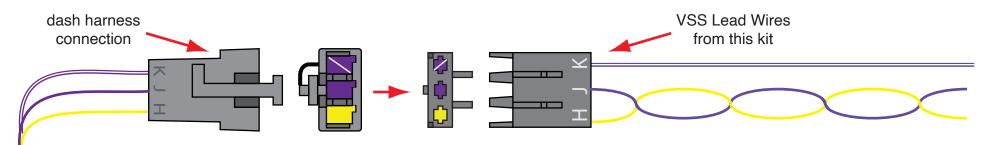

If you are using an aftermarket electric speedometer in your vehicle, you will need to connect the vehicle speed sensor (VSS) Lead Wires from this kit to the dash side connection of your dash harness. The yellow and solid purple wires must remain twisted together as shown above. These three wires will need to pass through the firewall or floor of your vehicle down to the vehicle speed sensor unit in the transmission. Generally, the solid purple wire connects to the "signal" lead, the yellow wire connects to the "ground" lead, and the purple/white stripe wire connects to the "12 volt power" lead on the vehicle speed sensor assembly. However, you should consult the directions that came with your gauges, and connect your vehicle speed sensor per the manufacturer's instructions.



VSS LEAD WIRES

Various Applications
Classic Update Series

510730

92972371

Rev 0.0

4/9/2019

www.americanautowire.com 856-933-0801

520002 Digital Gauge System Dim Wire Kit:

Ford Classic Update Kits (See page 2 MOPAR & JEEP kits)

Use this kit when installing an aftermarket digital gauge system that requires a 12-volt signal to dim the display when the parking lamps or headlights are turned on.

1. Locate the Headlight Switch Connector:

Locate the headlight switch connector in the dash harness section of the Classic Update Kit being installed, and remove the brown "PARK LIGHTS" / "REAR RUNNING LIGHTS" Wire(s) from the cavity shown in the illustration below. **DO NOT** cut the terminal off this connection, as it will be required later in the install.

For guidance, refer to American Autowire's instructional video on how to remove a terminal from a connector:

https://www.youtube.com/watch?v=_3GoK3xE1gs

2. Insert the Dimmer Jumper Wire:


Take the pre-terminated end of the dim wire jumper, which includes two wires in one terminal, and insert it into the now vacant cavity of the headlight switch connector (where the "PARK LIGHTS" / "REAR RUNNING LIGHTS" wire(s) have been removed).

3. Reconnect the Rear Running Lights Wire:

Insert the now loose "PARK LIGHTS" / "REAR RUNNING LIGHTS" wire terminal into the provided 58Fx1 connector (Item "A"). Plug this connector into the short pigtail section of the dim wire jumper as illustrated below.

4. Connect to the Digital Gauge System:

Route the long loose end of the dim wire jumper to the digital gauge control module. Cut the wire to the appropriate length and connect it to the dimmer input on the controller, following the manufacturer's instructions, to complete the installation.

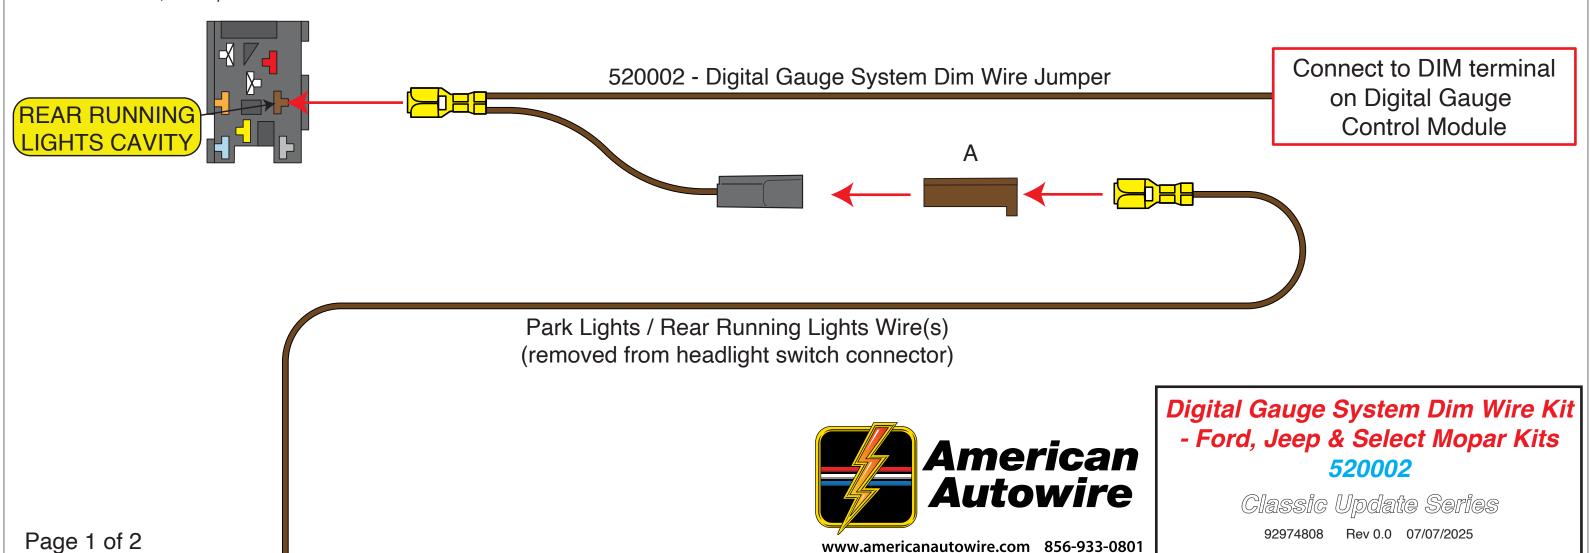

520002 Digital Gauge System Dim Wire Kit:

MOPAR & JEEP Classic Update Kits

Use this kit when installing an aftermarket digital gauge system that requires a 12-volt signal to dim the display when the parking lamps or headlights are turned on.

1. Locate the Headlight Switch Connector:

Locate the headlight switch connector in the dash harness section of the Classic Update Kit being installed, and remove the brown "PARK LIGHTS" / "REAR RUNNING LIGHTS" Wire(s) from the cavity shown in the illustration below. **DO NOT** cut the terminal off this connection, as it will be required later in the install.

For guidance, refer to American Autowire's instructional video on how to remove a terminal from a connector:

https://www.youtube.com/watch?v=_3GoK3xE1gs

2. Insert the Dimmer Jumper Wire:


Take the pre-terminated end of the dim wire jumper, which includes two wires in one terminal, and insert it into the now vacant cavity of the headlight switch connector (where the "PARK LIGHTS" / "REAR RUNNING LIGHTS" wire(s) have been removed).


3. Reconnect the Rear Running Lights Wire:

Insert the now loose "PARK LIGHTS" / "REAR RUNNING LIGHTS" wire terminal into the provided 58Fx1 connector (Item "A"). Plug this connector into the short pigtail section of the dim wire jumper as illustrated below.

4. Connect to the Digital Gauge System:

Route the long loose end of the dim wire jumper to the digital gauge control module. Cut the wire to the appropriate length and connect it to the dimmer input on the controller, following the manufacturer's instructions, to complete the installation.

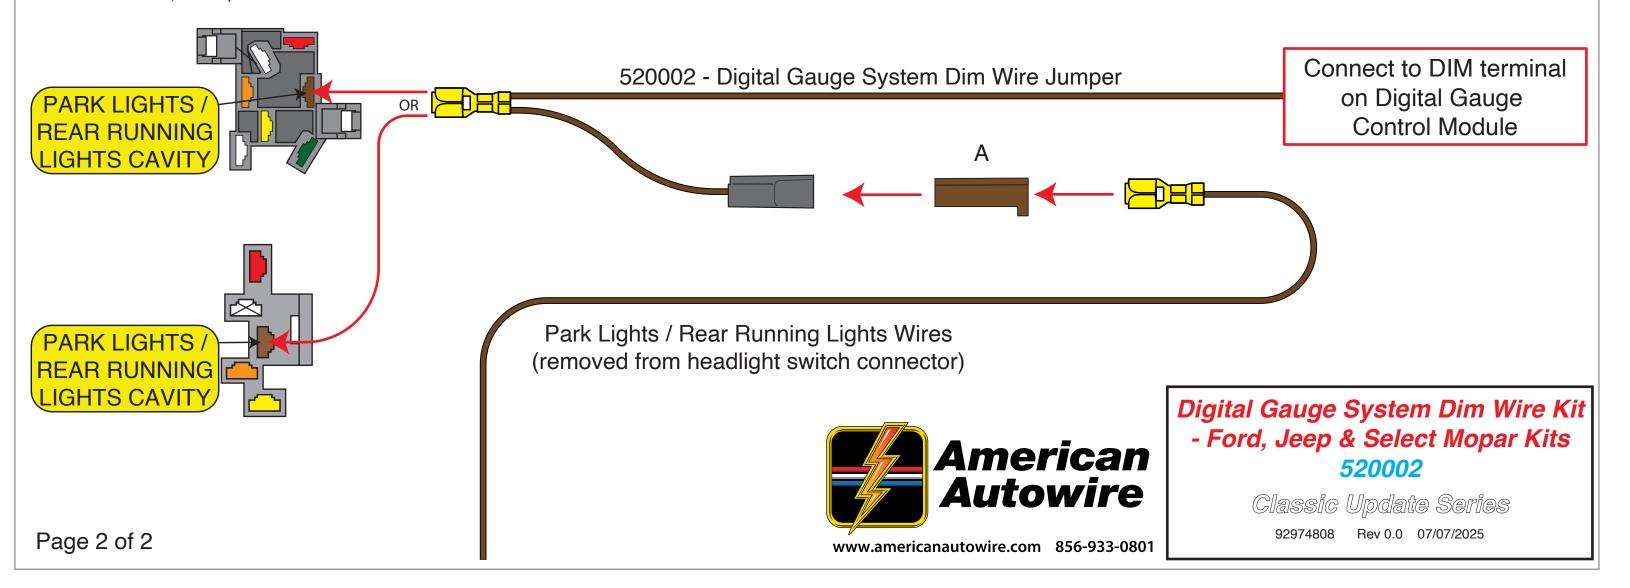

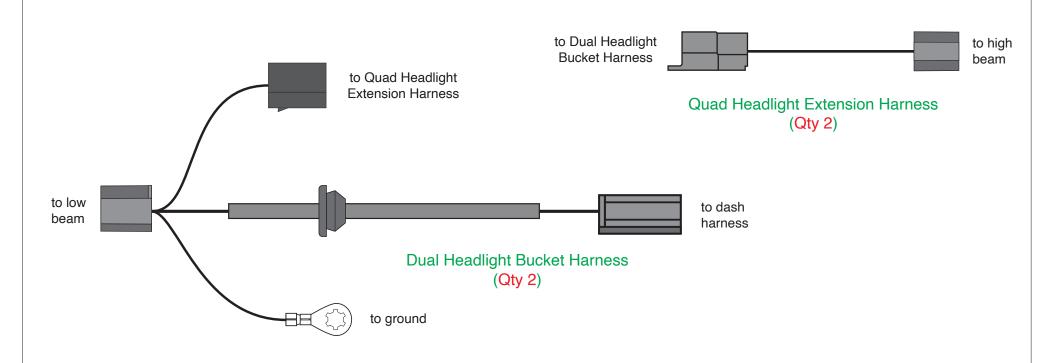

1. There are 2 dual headlight bucket harnesses (used on all vehicles) and 2 quad headlight extension harnesses (used on the 1958-60 vehicles) included in this kit.

2. All Vehicles:


Install a dual headlight bucket harness by routing the 2-way connector that connects to the dash harness 510652 through the headlight bucket from the inside of the bucket to the outside of the bucket. Note that the grommet on the dual headlight bucket harness has an interference fit to the loom and may move. Be careful to seat the grommet in the bucket without displacing the grommet on the loom. The 3-way connector on the dual headlight bucket harness connects to the low beam headlight; the 2-way T-shaped connector on the dual headlight bucket harness will connect to the quad headlight extension harness for vehicles with quad headlights.


3. Quad Headlight Extension Harness:

If you have a 1958-60 vehicle with quad headlights, you will need to connect the quad headlight extension harness to the dual headlight bucket harness that was just installed in step #2. After connecting the two harnesses together, the other 2-way connector on the quad headlight extension harness will connect to the high beam headlight.



www.americanautowire.com 856-933-0801



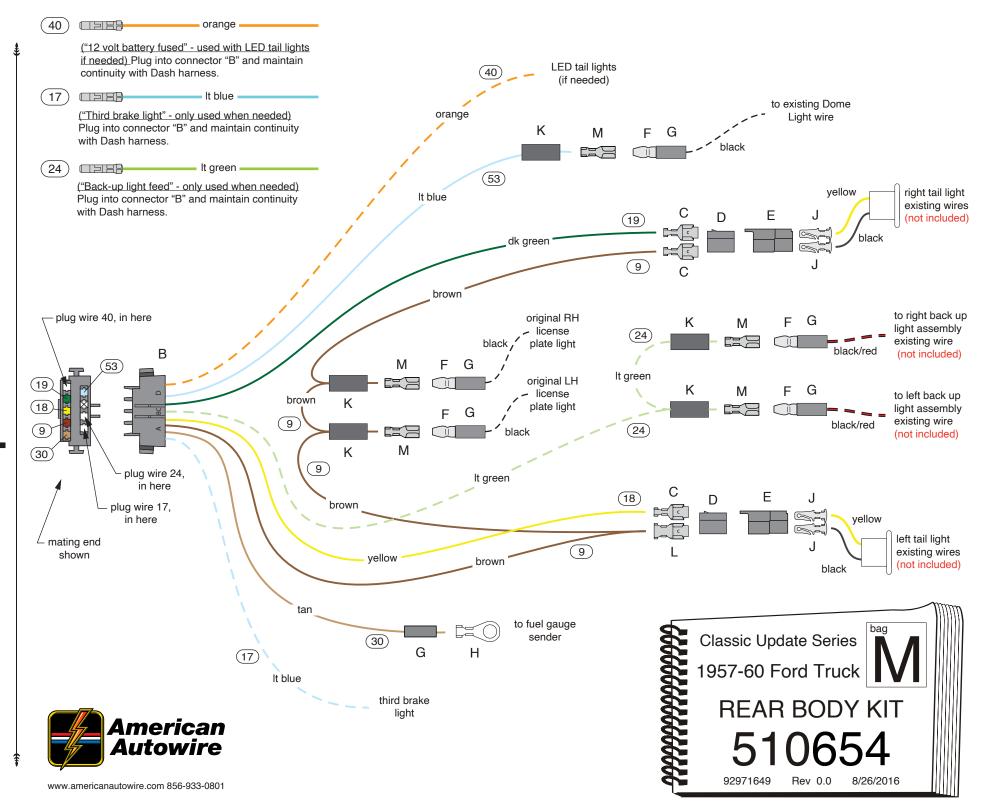

OPTIONAL WIRES TO BE PLUGGED INTO THE REAR BODY CONNECTOR

Obtain the rear body wiring harness 510654. If you have an aftermarket third brake light (light blue wire, circuit 17), back-up lights (light green wire, circuit 24), or rear LED tail lights (orange wire, circuit 40), the three wires for these options are in the rear body harness kit, but they are not plugged into the 9-way connector "B". If needed, plug these loose wires into the 9-way connector of the rear body harness connector "B" (see page 1). If the wires are not needed, you will NOT need to plug them into the rear body harness. Connect the rear body harness to the main dash harness 510652.

WIRES INSIDE THE PASSENGER COMPARTMENT

After connecting the 9-way rear body harness connector to the dash harness connector there will be up to three rear body harness wires that will remain in the passenger compartment. These wires are: the third brake light (circuit 17), the fuel gauge sender (circuit 30), and the dome light (circuit 53). Use the original factory retainers (tabs) to attach the wiring to the vehicle.

Third Brake Light (optional) As mentioned, if you have a third brake light obtain the loose light blue "THIRD BRAKE LIGHT" wire (circuit 17) and plug this wire into the 9-way connector "B". Route this wire up the A or B pillar and over to the third brake light. Connect to the third brake light.

Wire Color Printing Wire Number

Light Blue THIRD BRAKE LIGHT 17

<u>Fuel Gauge Sender</u> Obtain the tan "GAS GAUGE" wire (circuit 30) and route it up the A pillar and back down the B pillar and over to the fuel tank sender assembly. Or as an alternative, you may route this wire along the floor and then to the fuel tank sender assembly. Cut to length, slide on small sleeve "**G**", and crimp on ring terminal "**H**" and connect to the fuel tank sender assembly.

Wire Color Printing Wire Number

Tan GAS GAUGE 30

Dome Light If you have a dome light, this light requires a switched 12 volt feed wire, this wire is being provided. Obtain the light blue "12V CTSY SW" wire (circuit 53) and route this wire up the A or B pillar and over to the dome light. Cut to length, slide on large sleeve "**K**", and crimp on female bullet terminal "**M**" and connect to the dome light pigtail.

Wire Color Printing Wire Number

Light Blue 12V CTSY SW 53

WIRES OUTSIDE THE PASSENGER COMPARTMENT

Up to five wires: rear running and license light (circuit 9), LH turn (circuit 18), RH turn (circuit 19), back-up lights (circuit 24), and LED tail lights (circuit 40) will route through the firewall and then through the same firewall grommet as the dash harness wires. They will then route down the firewall, along the driver's side frame rail, and to the rear of the vehicle.

NOTE: You will have to replace the connector and terminals on each of your original tail light pigtails with new connectors and terminals. Cut the original molded connectors off of your tail light pigtail and crimp on terminals "J" and plug into the 2-way connector "E" (see page 1 for details).

Rear Running Lights and License Light

This brown wire is the feed to the tail lights and the license light. Obtain the brown "REAR RUNNING LIGHTS" wire (circuit 9) and route this wire to the LH tail light area, cut to length, double this wire with the cut off portion, install terminal "L" and plug into connector "D" (see page 1). Route the loose end of this brown wire to the license light area, cut to length, double this wire with the cut off portion, slide on large sleeve "K", install female bullet terminal "M". Repeat this installation if you have a second license light. Route the loose end of this brown wire to the RH tail light area, cut to length, install terminal "C" and plug into connector "D".

<u>Wire Color</u> <u>Printing</u> <u>Wire Number</u>

Brown REAR RUNNING LIGHTS 9

sheet 2

<u>Left Hand Tail Light Assembly</u> Obtain the yellow "LEFT REAR TURN" wire (circuit 18) and route it to the LH tail light, cut to length, install terminal "C" and plug into the empty cavity of connector "D" (see page 1).

Wire Color Printing Wire Number

Yellow LEFT REAR TURN 18

Right Hand Tail Light Assembly Obtain the dark green "RIGHT REAR TURN" wire (circuit 19) and route it to the RH tail light, cut to length, install terminal "C" and plug into the empty cavity of connector "D" (see page 1).

Wire Color Printing Wire Number

Dark Green RIGHT REAR TURN 19

Back-Up Lights (optional) As mentioned, if you have the optional back-up lights, obtain the loose light green "BACK UP LT SW" wire (circuit 24) and plug this wire into the 9-way connector "B". This light green wire is the feed for the optional back-up lights. Route this wire to the LH back-up light, cut to length, double this wire with the cut off portion, install large sleeve "K", and crimp on female bullet terminal "M", slide sleeve "K" onto terminal "M", now connect to the LH back-up light. Route the loose end of this light green wire over to the RH back-up light area, cut to length, install sleeve "K", and crimp on terminal "M", slide sleeve "K" onto terminal "M", now connect to the RH back-up light.


<u>Wire Color</u> <u>Printing</u> <u>Wire Number</u>

Light Green BACK UP LT SW 24

LED Tail Lights (optional)

If you have aftermarket LED tail lights that require a 12 volt Battery feed wire, this wire is being provided. As previously mentioned, obtain the loose orange "12V BATTERY - FUSED" wire (circuit 40) and plug this wire into connector "**B**". Route this wire to the LED tail lights and connect.


Wire Color	<u>Printing</u>	Wire Number
Orange	12V BATTERY – FUSED	40




(Rear Body 9-way Pack Con -Reference, 1 pc)



(56 Series single female terminal, 5 pcs)



(56 Series 2-way female connector, 2 pcs)



(56 Series 2-way male connector, 2 pcs)



(Single male bullet terminal, 7 pcs)



(Small rubber sleeve, 8 pcs)



(ring terminal, 2 pcs)




(56 Series single male terminal, 6 pcs)

K



(Large rubber sleeve, 7 pcs)



(56 Series double female terminal, 2 pcs)



(Single female bullet terminal, 7 pcs)

THIS PAGE INTENTIONALLY LEFT BLANK

In this kit you will find the following:

- 1. One Main Firewall Grommet F.
- 2. Misc. connectors, terminals, and sleeves to complete the Engine Compartment and Passenger Compartment connections.
- 3. Two large wrap-around clamps **S**, plus screw, nut and washers **R**, to hold the Main Dash Harness bundle in place in the Instrument Panel.
- 4. Four small wrap-around clamps **G** to hold the Main Dash Harness in place in the Engine Compartment along the Firewall.
- 5. Two Door Jamb Switches Y, for the Interior Lighting.

Use these parts to complete the connections from the Main Dash Harness **510652** to the various components in the Engine Compartment and the Passenger Compartment (see Instructions **92971606**).

The 1957 to 1960 Ford Truck had one round hole in the upper left corner of the Firewall that allowed wiring to pass through from the Passenger Compartment to the Engine Compartment. You will attach Grommet F, with a Grommet Retainer of your choice, to this location, prior to passing any wiring through the grommet.

The two **S** Clamps will retain the Dash Harness to the Steering Column Support Bracket. Bolts, Nuts and Washers **R** are provided for these larger clamps. The four **G** Clamps will secure the Dash Harness across the back of the Firewall behind the Engine. You will provide your own fasteners for these smaller clamps.

When connected and installed, the Door Jamb Switches will allow the Dome Light and the new Underdash Courtesy Lamps to function with the opening of the doors.



PART#

510656

DESCRIPTION:

Parts Kit 1957-60 Ford Truck Classic Update Series

92971655


Rev 1.0

9/5/2018

In the box below, you will find the legend for the misc. terminals, plastic connector bodies, and the main firewall grommet, that will be used to complete your main power, forward lighting, engine, and alternator connections. They are itemized and referred to on this page, just as they are on pages 15 and 16 of the Main Instruction set (92971606) and the Fuse Block Mounting Instructions (92971669).

А		(large male bullet terminal, 5 pcs.)	Б	(EG parion 1 way famala connector white 1 no.)
В		(56 series single female terminal, 24 pcs.)	Р	(56 series 1-way female connector, white, 1 pc.)
С	,	(56 series double female terminal, 14 pcs.)	Q	(56 series 1-way female connector, brown, 1 pc.)
D		(large rubber sleeve, 14 pcs.)	R	(1/4" bolt, nut and washer; 2 of each)
E		(56 series 1-way female connector, 5 pcs.)	S	(clamp, "J" style, large, 2 pcs.)
F		(grommet, 1 pc.)	Т	(56 series 2-way female connector, w/lock wedge, 2 pcs.)
G		(clamp, "J" style, small, 4 pcs.)	U	(56 series 2-way male connector, 2 pcs.)
Н		(small male bullet terminal, 6 pcs.)	V	(56 series 2-way male connector, w/lock, 2 pcs.)
J		(small rubber sleeve, 14 pcs.)	W	(56 series single male terminal, 10 pcs.)
K		(small ring terminal for larger gauge wire, 2 pcs.)	X	(56 series double male terminal, 4 pcs.)
M		(small ring terminal for smaller gauge wire, 6 pcs.)	Υ	(door jamb switch, 2 pcs.)
N		(56 series 1-way female connector, black, 4 pcs.)	Z	(56 series 1-way male connector, 1 pc.)

(144.0" 6 Gauge charge wire)

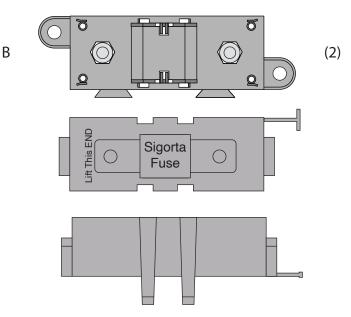

(Megafuse body, cover and two M8 x 1.25 nuts / lock washers)

C (175 amp Megafuse) G

D (1) (Megafuse jumper) H

E (Alternator boot)

F (cut into six 1.0" pieces)

- 1. One this page, you will find the wire, fuse bodies, fuses, boot, ring terminals, and shrink tubing (items A through K) that are necessary to connect your alternator and main power feed for your new AAW wiring kit. Please be sure that all of the necessary components are present before starting this portion of your installation. If anything is missing, stop what you are doing and contact AAW at the number listed below right away.
- 2. On page 2, you will find directions for building the 2 Megafuse assemblies (items B,C and D) into one unit.
- 3. On page 3, you will find an overall concept of how to connect the Megafuse assemblies to your starter solenoid, alternator and main power feed of your new wiring system.
- 4. On page 4, you will find tips on building your charging circuit wires and assembling them and the main panel power feed wire to the Megafuse assembles.



(6Ga. starter ring terminal)



(6Ga. megafuse terminal)



(6Ga. alternator terminal)



(10Ga. megafuse terminal)



www.americanautowire.com 856-933-0801

PART#

510476

Z


DESCRIPTION:

Alternator and Main Power Connection Kit Various Applications

92972153 instruction sheet rev 0.1 6/24/2019

Page 1


Α

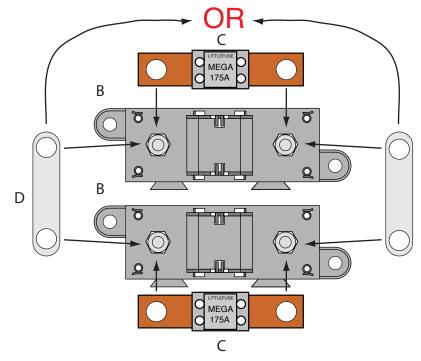


Assembling the (2) Megafuse assemblies

NOTE: Find a suitable place, as close to the battery power source as possible, under the hood of the your vehicle to mount the completed Megafuse assemblies. Keep in mind that you have 12 feet of 6Ga. charging wire, and that the main power feed coming from your panel or bulkhead connection must also be able to reach the assembly.

- 1. Take the two Megafuse bodies and covers (items B) and snap them together. Remove the 4 nuts and lock washers from the studs on the fuse body assemblies.
- 2. Install the Megafuse jumper (item D above) over two of the studs on the Megafuse bodies. It is very important that the jumper MUST BE assembled on the side that is going to connect to your main power connection (starter solenoid or battery feed).
- 3. Notch top cover to clear jumper D as shown at right.
- 4. Snap one 175amp fuse (items C) onto the studs of each of the two Megafuse bodies (items B), over the jumper, then loosely re-attach the 4 nuts and lock washers back onto the assembled Megafuses. The fuse assemblies are ready to install into your vehicle. Page 2

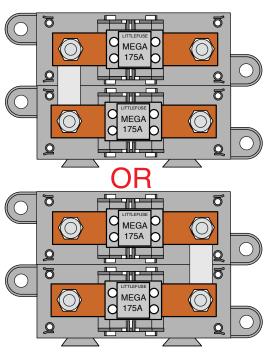

Assembled Megafuses

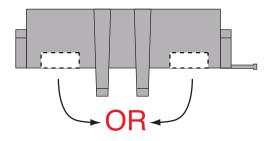

Notched Cover

PART#


510476

Z

DESCRIPTION:

Alternator and Main Power
Connection Kit
Various Applications

92972153 instruction sheet rev 0.1 6/24/2019

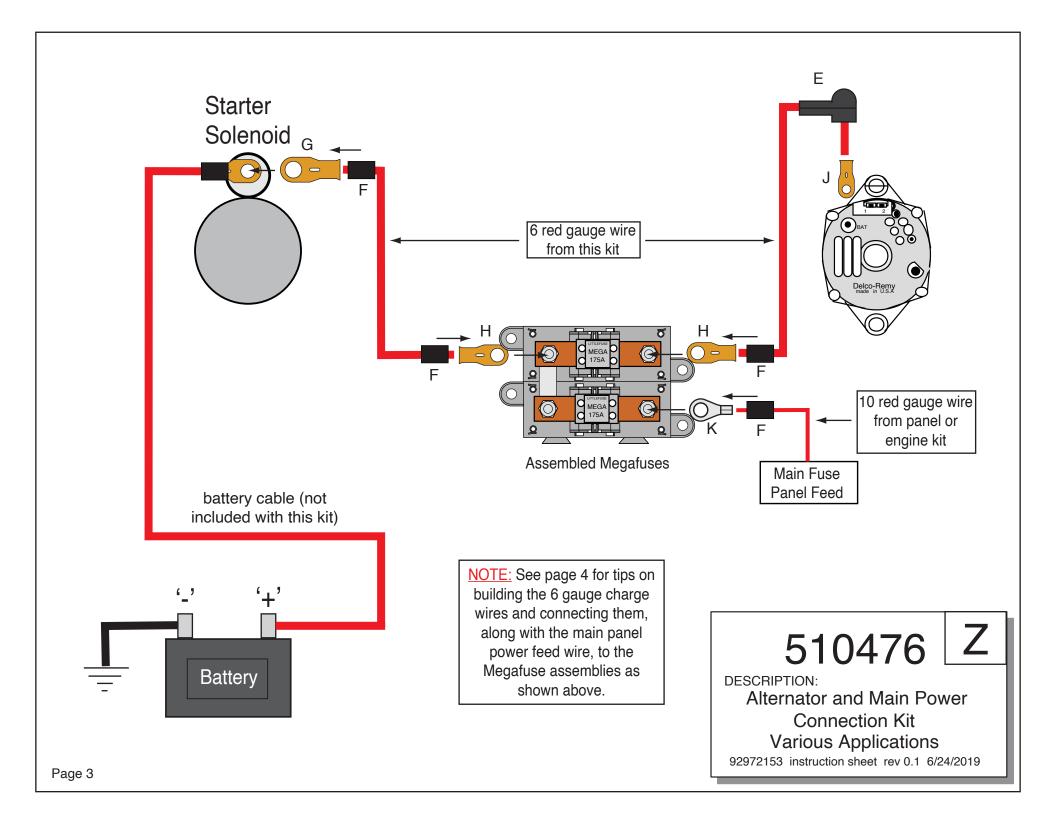

Building the 6Ga. charge wires and connecting them and the main panel power feed wire to the Megafuse assemblies:

NOTE: Make sure that your battery is disconnected! You will need to install the preassembled Megafuses from page 2 in your vehicle to start this part of the installation.


- 1. Pre-cut item F shrink tubing into (6) 1.00" 1.25" pieces.
- 2. Take the 12-foot piece of 6Ga. red wire from this kit and route it from your starter (or other battery feed) over to the area where you have mounted your Megafuse and cut it to length. Strip the insulation on each end back 1/2". Install 2 pieces of shrink tubing F onto the wire. At the starter end, crimp and solder (1) of terminal G onto the wire. At the Megafuse end, crimp and solder (1) of terminal H onto the wire. Slide the shrink tubing over the terminals and heat it up to shrink it down.
- 3. Take the remaining portion of the 12-foot piece of 6Ga. red wire from this kit and route it from your alternator over to the area where you have mounted your Megafuse and cut it to length. Strip the insulation on each end back 1/2". Install 1 piece of shrink tubing F onto the wire. At the alternator end, slip on boot E as shown on page 3, then crimp and solder (1) of terminal J onto the wire. At the Megafuse end, crimp and solder (1) of terminal H onto the wire. Slide the shrink tubing over terminal H and heat it up to shrink it down.
- 4. Take the 10Ga. red main power feed wire from your engine or panel sub-kit and route it over to the area where you have mounted your Megafuse and cut it to length. Strip the insulation back 3/8". Install 1 piece of shrink tubing F onto the wire, then crimp and solder (1) of terminal K onto the wire.
- 5. Remove the 4 loosely tightened nuts and lock washers from the assembled Megafuses, then using the drawing on page 3 as a guide, install your pre-assembled wires from steps 2-4 above. Re-install the 4 nuts and lock washers onto the assembled Megafuses and tighten them down. This part of your installation is now complete.

510476 | Z

DESCRIPTION:

Alternator and Main Power Connection Kit **Various Applications**

92972153 instruction sheet rev 0.1 6/24/2019

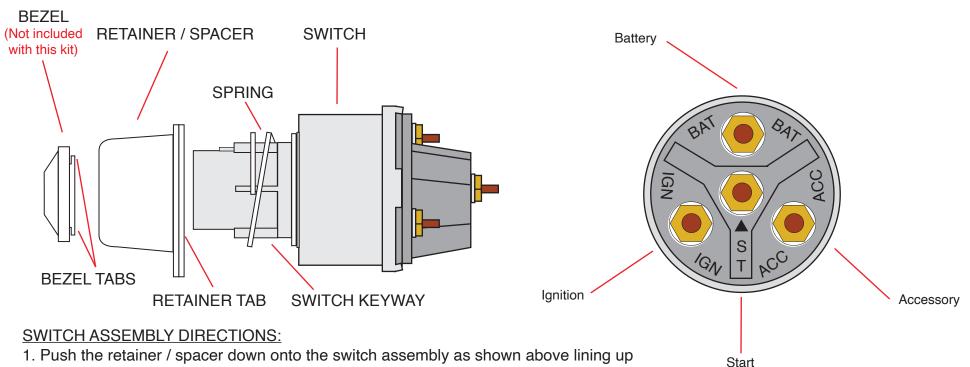

- the tab on the retainer with the keyway on the switch.
- 2. From behind the dash, push the switch and retainer assembly through the opening in the face of the dashboard compressing the spring on the switch so that the front edge of the switch comes through the dashboard opening.
- 3. With the spring compressed and the switch protruding through the opening in the dash, press the bezel (not included) into the face of the switch aligning the two tabs on the bezel with the openings in the face of the switch, twist the bezel 1/4 turn to your right which will lock the tabs into the switch, release the pressure on the spring where you were pushing the switch assembly through the opening in the dash from behind, and the entire assembly will lock into place.

DASH HARNESS CONNECTIONS:

1. Please refer to the detailed instructions on page 11, circuit node 4, of the 92971606 instructions to properly connect the four wire leads to the switch. Attach the red "12V BAT" wire to the "BAT" stud; attach the pink "IGNITION FEED" wire to the "IGN" stud; attach the purple "NEUTRAL SAFETY SWITCH" wire to the "ST" stud; attach the double brown "IGNITION SW ACCY, ALTERNATOR IGNITION" wires to the "ACC" stud.



150 Heller PI #17 W Bellmawr, NJ 08031 856-933-0801


PART#

510655

DESCRIPTION:

Ignition Switch and Keys 1957-1960 Ford Truck Classic Update Series

92971653 instruction sheet rev 0.0 7/22/2016

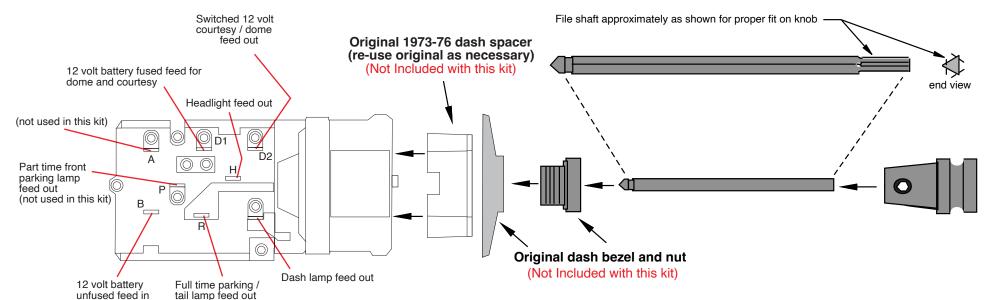



NOTE 1: If you are using this new AAW switch in a 1953-55 Ford Truck that originally used a 6 volt switch, you will find that the threaded area on your original nut is too small in diameter. You will need to purchase a new 1956 12 volt style replacement nut which is larger in diameter and will fit this new AAW switch and still allow for the use of your stock dash bezel. These are readilly available from your favorite truck parts supplier.

NOTE 2: If you are using this new AAW switch for a 1973-76 Ford Truck application, it may be necessary to remove and re-use the dash spacer shown above from your original switch (most are only affixed with double faced tape from the factory), especially if you are planning to use your original shaft and knob assembly. Please check the harness to switch connection for dash clearance issues.

- 1. Install the new switch into your dash using the original bezel and nut. It will be necessary too cut the shaft for a nice custom installation.
- 2. Install the shaft in switch being certain that it is fully engaged inside the switch.

 Once the shaft is fully seated down inside the switch in the "off" position, place the knob on end of shaft. Measure how far away from the dash the bottom face of the knob (closest to dash) is. Allow for 1/4" or so extra so that the knob will not bottom out on dash once the shaft has been cut to length.
- 3. Remove the shaft from the switch. To do this, pull the shaft completely out to the "on" position. Reach up under the dash and depress the button on top of the switch and pull the shaft out of the switch. Cut the shaft based on your measurements. It may be necessary to file the end of the shaft once it has been cut in order to reinstall the knob onto the shaft.
- 4. Attach the knob to the cut shaft and tighten the allen screw.
- 5. Reinstall your newly customized shaft into your headlight switch assembly.



www.americanautowire.com 856-933-0801


PART#

510264

DESCRIPTION:

Headlight Switch 1953-56, 1961-66 & 1973-79 Ford Truck Classic Update Series

92969840 instruction sheet rev 3.0 1/15/2013

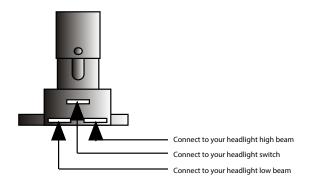

Connect the Dimmer Switch wires as shown above.

- 1. The top center terminal of the Dimmer Switch is connected to the Headlight switch.
- 2. The terminal on the right side is connected to your headlight high beam terminal.
- 3. The terminal on the left side is connected to your headlight low beam terminal.

another wiring product by...



150 Heller PI #17 W Bellmawr, NJ 08031

856-933-0801


PART#

500042

DESCRIPTION:

DIMMER SWITCH

92964573 instruction sheet Rev 3.0 6/29/99



Connect the Dimmer Switch wires as shown above.

- 1. The top center terminal of the Dimmer Switch is connected to the Headlight switch.
- 2. The terminal on the right side is connected to your headlight high beam terminal.
- 3. The terminal on the left side is connected to your headlight low beam terminal.

another wiring product by...



150 Heller Pl #17 W Bellmawr, NJ 08031

856-933-0801

PART#

500042

DESCRIPTION:

DIMMER SWITCH

92964573 instruction sheet

Rev 3.0 6/29/99