


NOTE: If the fuse panel on your 500878 '69-'72 Nova kit **HAS** a sticker like the photo at the left, you have the second design harness and your instructions are listed below and follow this page.



Number	Description
500332	Headlight Switch
500707	Fuse, Relay, and Flasher kit
500708	Courtesy Light kit
500919	Practice Terminal Crimping Set
510512	Dash Harness kit
510510	Engine Wiring Kit
510511	Front Light Wiring kit
510509	Instrument Cluster Wiring kit
520001	Digital Gauge System Dim Wire
500664	Console Gauge Wiring kit
500673	Rear Body Wiring kit
510476	Alternator and main power Connection kit
510730	VSS Connection kit
500042	Floor Dimmer Switch
92972485	Kit Introduction Instruction Sheet
92972486	Warning Sheet

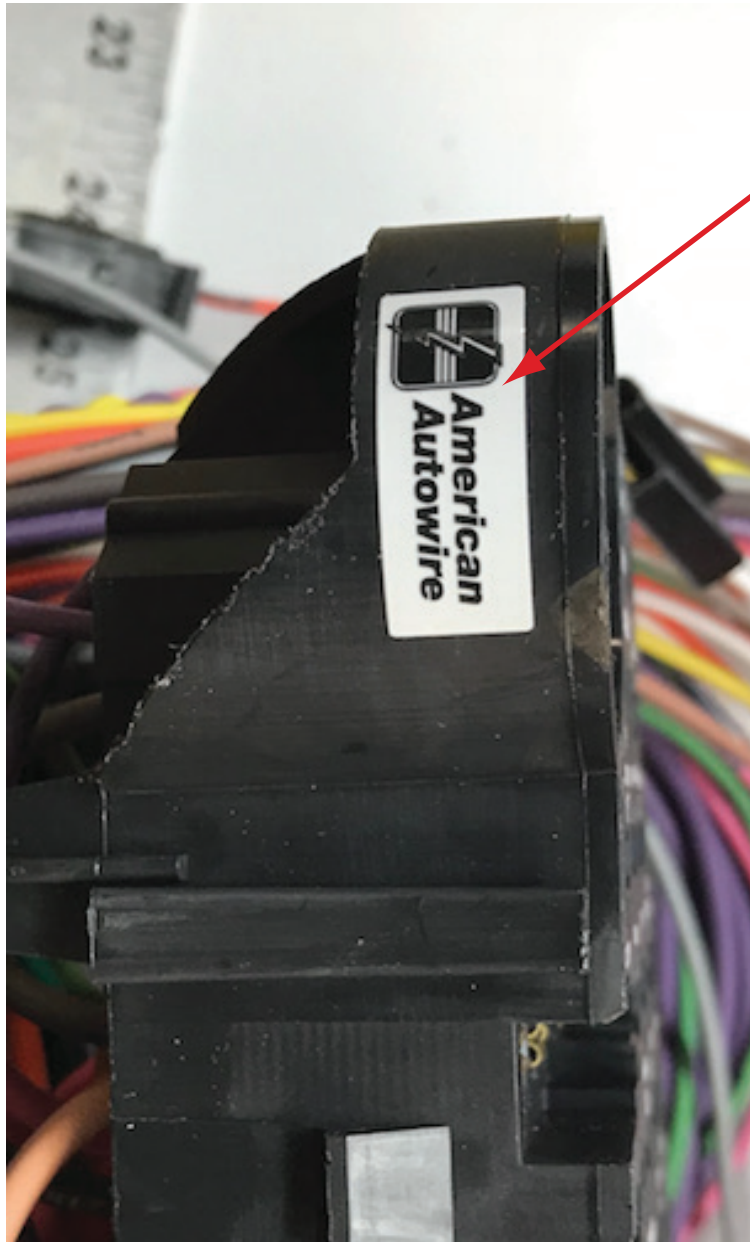

**American
Autowire**

www.americanautowire.com 856-933-0801

69-72 Nova Second Design Instructions

92972874 rev. 1.0 10/15/2025



WARNING:

Validate the kit contents with the component list included on page 2 of this sheet before proceeding. This kit is intended to be used in a modified vehicle. Please read this sheet thoroughly and be sure that you understand everything explained on it prior to opening any of the enclosed packages, or before attempting to install any of the components. Once this kit has been opened or a component installed, the kit is not returnable.

1. This kit should typically be used in a **MODIFIED** application only.
2. This kit supports the use of factory heater systems and aftermarket heater and A/C systems. The kit supplies power to a factory A/C control head but **DOES NOT** include the actual A/C harness for an original factory A/C vehicle. Factory original A/C harnesses are available under our Factory Fit product line as they are self contained harnesses made to fit and work with the stock A/C component configuration.
3. This kit supports the use of a high current self-exciting 1-wire alternator or other style internally regulated alternators. An adapter may be necessary in some applications. The use of a stock, low amperage alternator is seriously discouraged as they cannot handle the higher current requirements of updated ignition systems, electric fans, aftermarket A/C systems, stereo systems, air ride suspensions, and other power hungry accessories and will ultimately create performance issues with the system.
4. This kit **WILL NOT** support the use of a factory ammeter. All AAW kits are engineered to supply the optimum charge to the battery. To achieve this performance, we route our 6ga. charge wire directly from the alternator output charge terminal to the starter battery terminal. Due to the path of the charge being altered from the stock configuration, the gauge can no longer see a charge vs. a discharge, so it will not work properly. When ammeters were originally used, most generator or alternator current outputs were rated at a maximum of about 25-60 amps. Modified cars being built today typically utilize a 100 amp or higher output alternator. With these higher current units, ammeters, generally speaking, become a safety hazard. Ammeters are usually wired in parallel to the charging circuit, are typically unfused, and can short very easily causing a fire. A voltmeter is recommended as a good alternative.
5. This kit **IS NOT** set up with a resistance wire for a standard, points type ignition system. It is wired with a full 12 volt primary ignition feed that is hot in the run position. Primary ignition voltage in the starting position is handled via a full 12 volt bypass wire. Our system will support HEI, MSD, other electronic ignition systems, as well as most all computerized Fuel Injection systems. If you wish to run a points type system, there are illustrations on the engine connection pages to do so. Extra parts (ballist resistor) that are not included in this kit will be required to complete that operation.



500878 - Classic Update Series Kit 1969-72 Chevrolet Nova

This kit contains the following components:

<u>Bag</u>	<u>Part Number</u>	<u>Description</u>	<u>Quantity</u>
	500042	Floor Dimmer Switch	1
	500332	Headlight Switch	1
H	510509	Instrument Cluster wiring kit	1
K	500664	Console Gauge wiring kit	1
J	510510	Engine Wiring Kit	1
L	510511	Front Light Wiring kit	1
M	500673	Rear Body Wiring kit	1
	500707	Fuse, Relay, and Flasher kit	1
N	500708	Courtesy Light kit	1
G	510512	Dash Harness kit	1
	500919	Practice Terminal Crimping Set	1
V	510730	VSS Connection Kit	1
Z	510476	Alternator and Main Power kit	1
	520001	Digital Gauge System Dim Wire - GM Kits	1
	92972485	Kit Introduction Instruction Sheet	1
	92972486	Warning Sheet	1

Validate the kit contents with this component list. If there are any discrepancies with incorrect or missing parts, stop your installation and notify the supplier you purchased the kit from before proceeding.



Classic Update Series


1969-72 Nova

START HERE !

PLEASE READ THIS BEFORE STARTING INSTALLATION !

This wiring kit is designed for ease of installation. Please read the guidelines below, BEFORE STARTING your installation to guarantee a successful job!! Use an appropriate crimping tool which folds the crimp wings on the terminals as shown below. Top quality crimping tools are available from American Autowire or American Autowire authorized dealers.

NOTE: ALL TERMINALS THAT YOU INSTALL SHOULD BE PROPERLY SOLDERED.
Our factory terminations are installed by GM approved termination presses, and soldering is not necessary on these terminations.

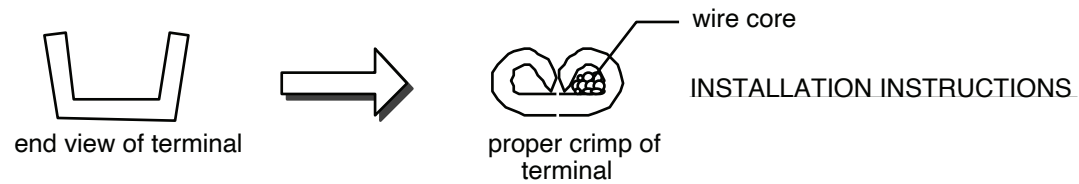

STEP 1: DISCONNECT YOUR BATTERY:
Disconnect the battery before installing the wiring kit to prevent any accidental shorting caused by loose bare wire ends.

STEP 2: START INSTALLING KIT: This kit is broken down into individual steps that are identified by a letter printed on the instruction sheets visible through each bag. These letters are the order of operationfor installing your kit. Start with the bag letter “G”, then “H”, etc. The order of installation is shown below:

- | | |
|----------|-------------------------------|
| G 510512 | Dash Harness Kit |
| H 510509 | Instrument Cluster Kit |
| J 510510 | Engine Kit |
| K 500664 | Console Kit |
| L 510511 | Front Light Kit |
| M 500673 | Rear Body Kit |
| N 500708 | Courtesy Light Kit |
| V 510730 | VSS Connection Kit |
| Z 510476 | Alternator and Main Power Kit |

STEP 3:RECONNECT YOUR BATTERY:
When you have completed the installation and are ready to reconnect the battery, make sure that the following electrical system grounds are in place:

- A.Battery is grounded to the ENGINE BLOCK.
- B.Battery is grounded to the frame.
- C.Engine block is grounded to the frame.
- D.Body is grounded to the frame.

STEP 4:CHECK ALL ELECTRICAL FUNCTIONS:
Any non-functioning items should be checked for proper installation. Any problems with your wiring and electrical circuit functions should be addressed to American Autowire Systems, Inc. as soon as possible to avoid any warranty problems.


If you have any questions concerning this or any of our products, please feel free to call us at 1-800-482-WIRE.

We carry many accessories for your 1969 Camaro


p/n R0067108
OEM style non-stick harness tape



p/n CA82006 (1969-72)
Factory console gauge terminal kit.

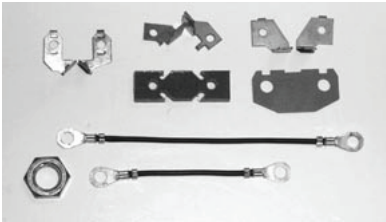

p/n 01993464 (1969-71)
p/n 01994180 (1972)
OEM style wiper switch.

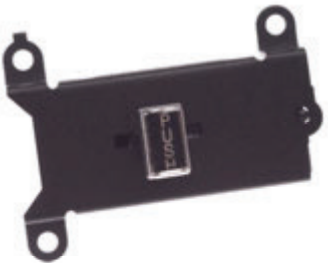

p/n 03943657 (1969-72)
Muncie 4 speed back up lamp switch.



p/n 510586
OEM large terminal and double crimping tool (20-8 gauge).



p/n 510585
Multi-crimp tool (20-14 gauge).



p/n 38131
Breakerless Ignition Module,
GM V-8 POINT CONVERSION KIT



p/n 36310 (1969)
p/n 36311 (1970)
p/n 36312 (1971)
p/n 36313 (1972)

Factory assembly manual.
(It's what they used on the assembly line to build your Nova!)



www.americanautowire.com 856-933-0801

Classic Update Series

1969-72 Nova


500878

© COPYRIGHT 2004 American Autowire / Factory-Fit
Used with express permission of
American Autowire / Factory-Fit
92972485 instruction sheet rev. 0.0 8/1/2019

1060 72 Noya



www.americanautowire.com 856-933-0801

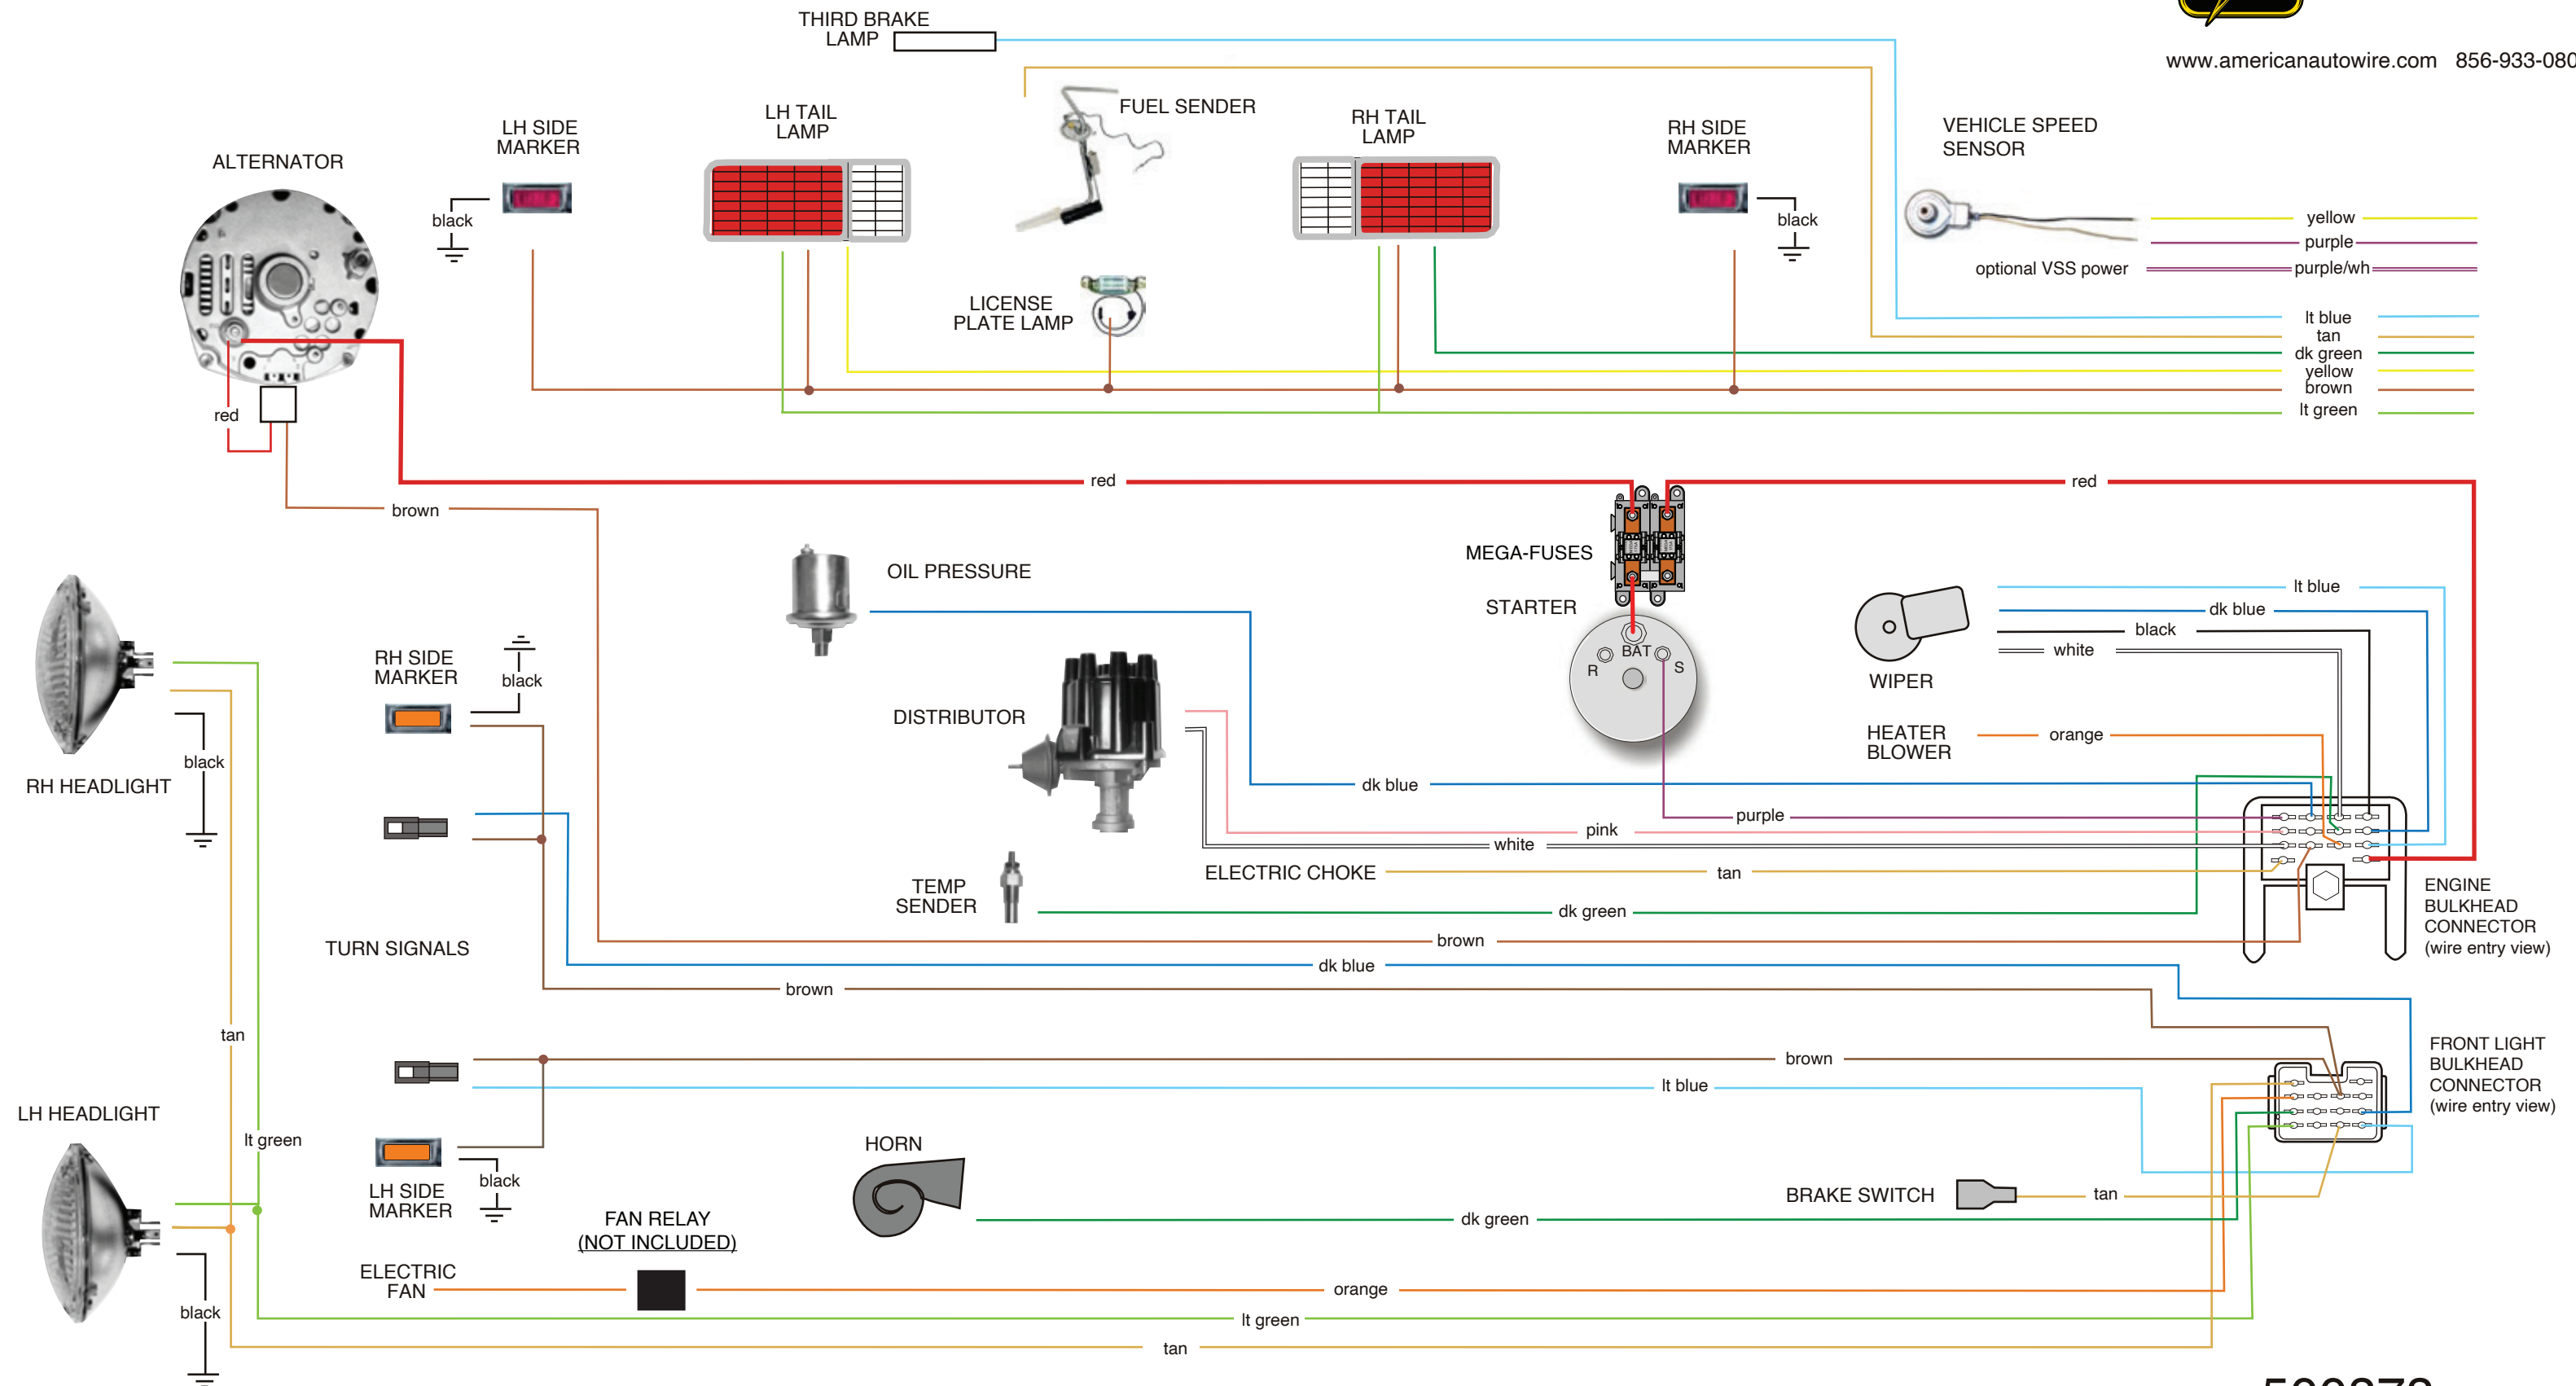


500878

NOTICE: This schematic drawing is for reference only. Do not use the schematic to install this wiring kit! Use the instruction sheets included in each bag, which includes directions for proper terminations, and specific applications (such as Rally Sport).

© COPYRIGHT 2004 American Autowire / Factory-Fit
Used with express permission of American Autowire / Factory-Fit
92972485 instruction sheet rev. 0.0 8/1/2019



www.americanautowire.com 856-933-0801

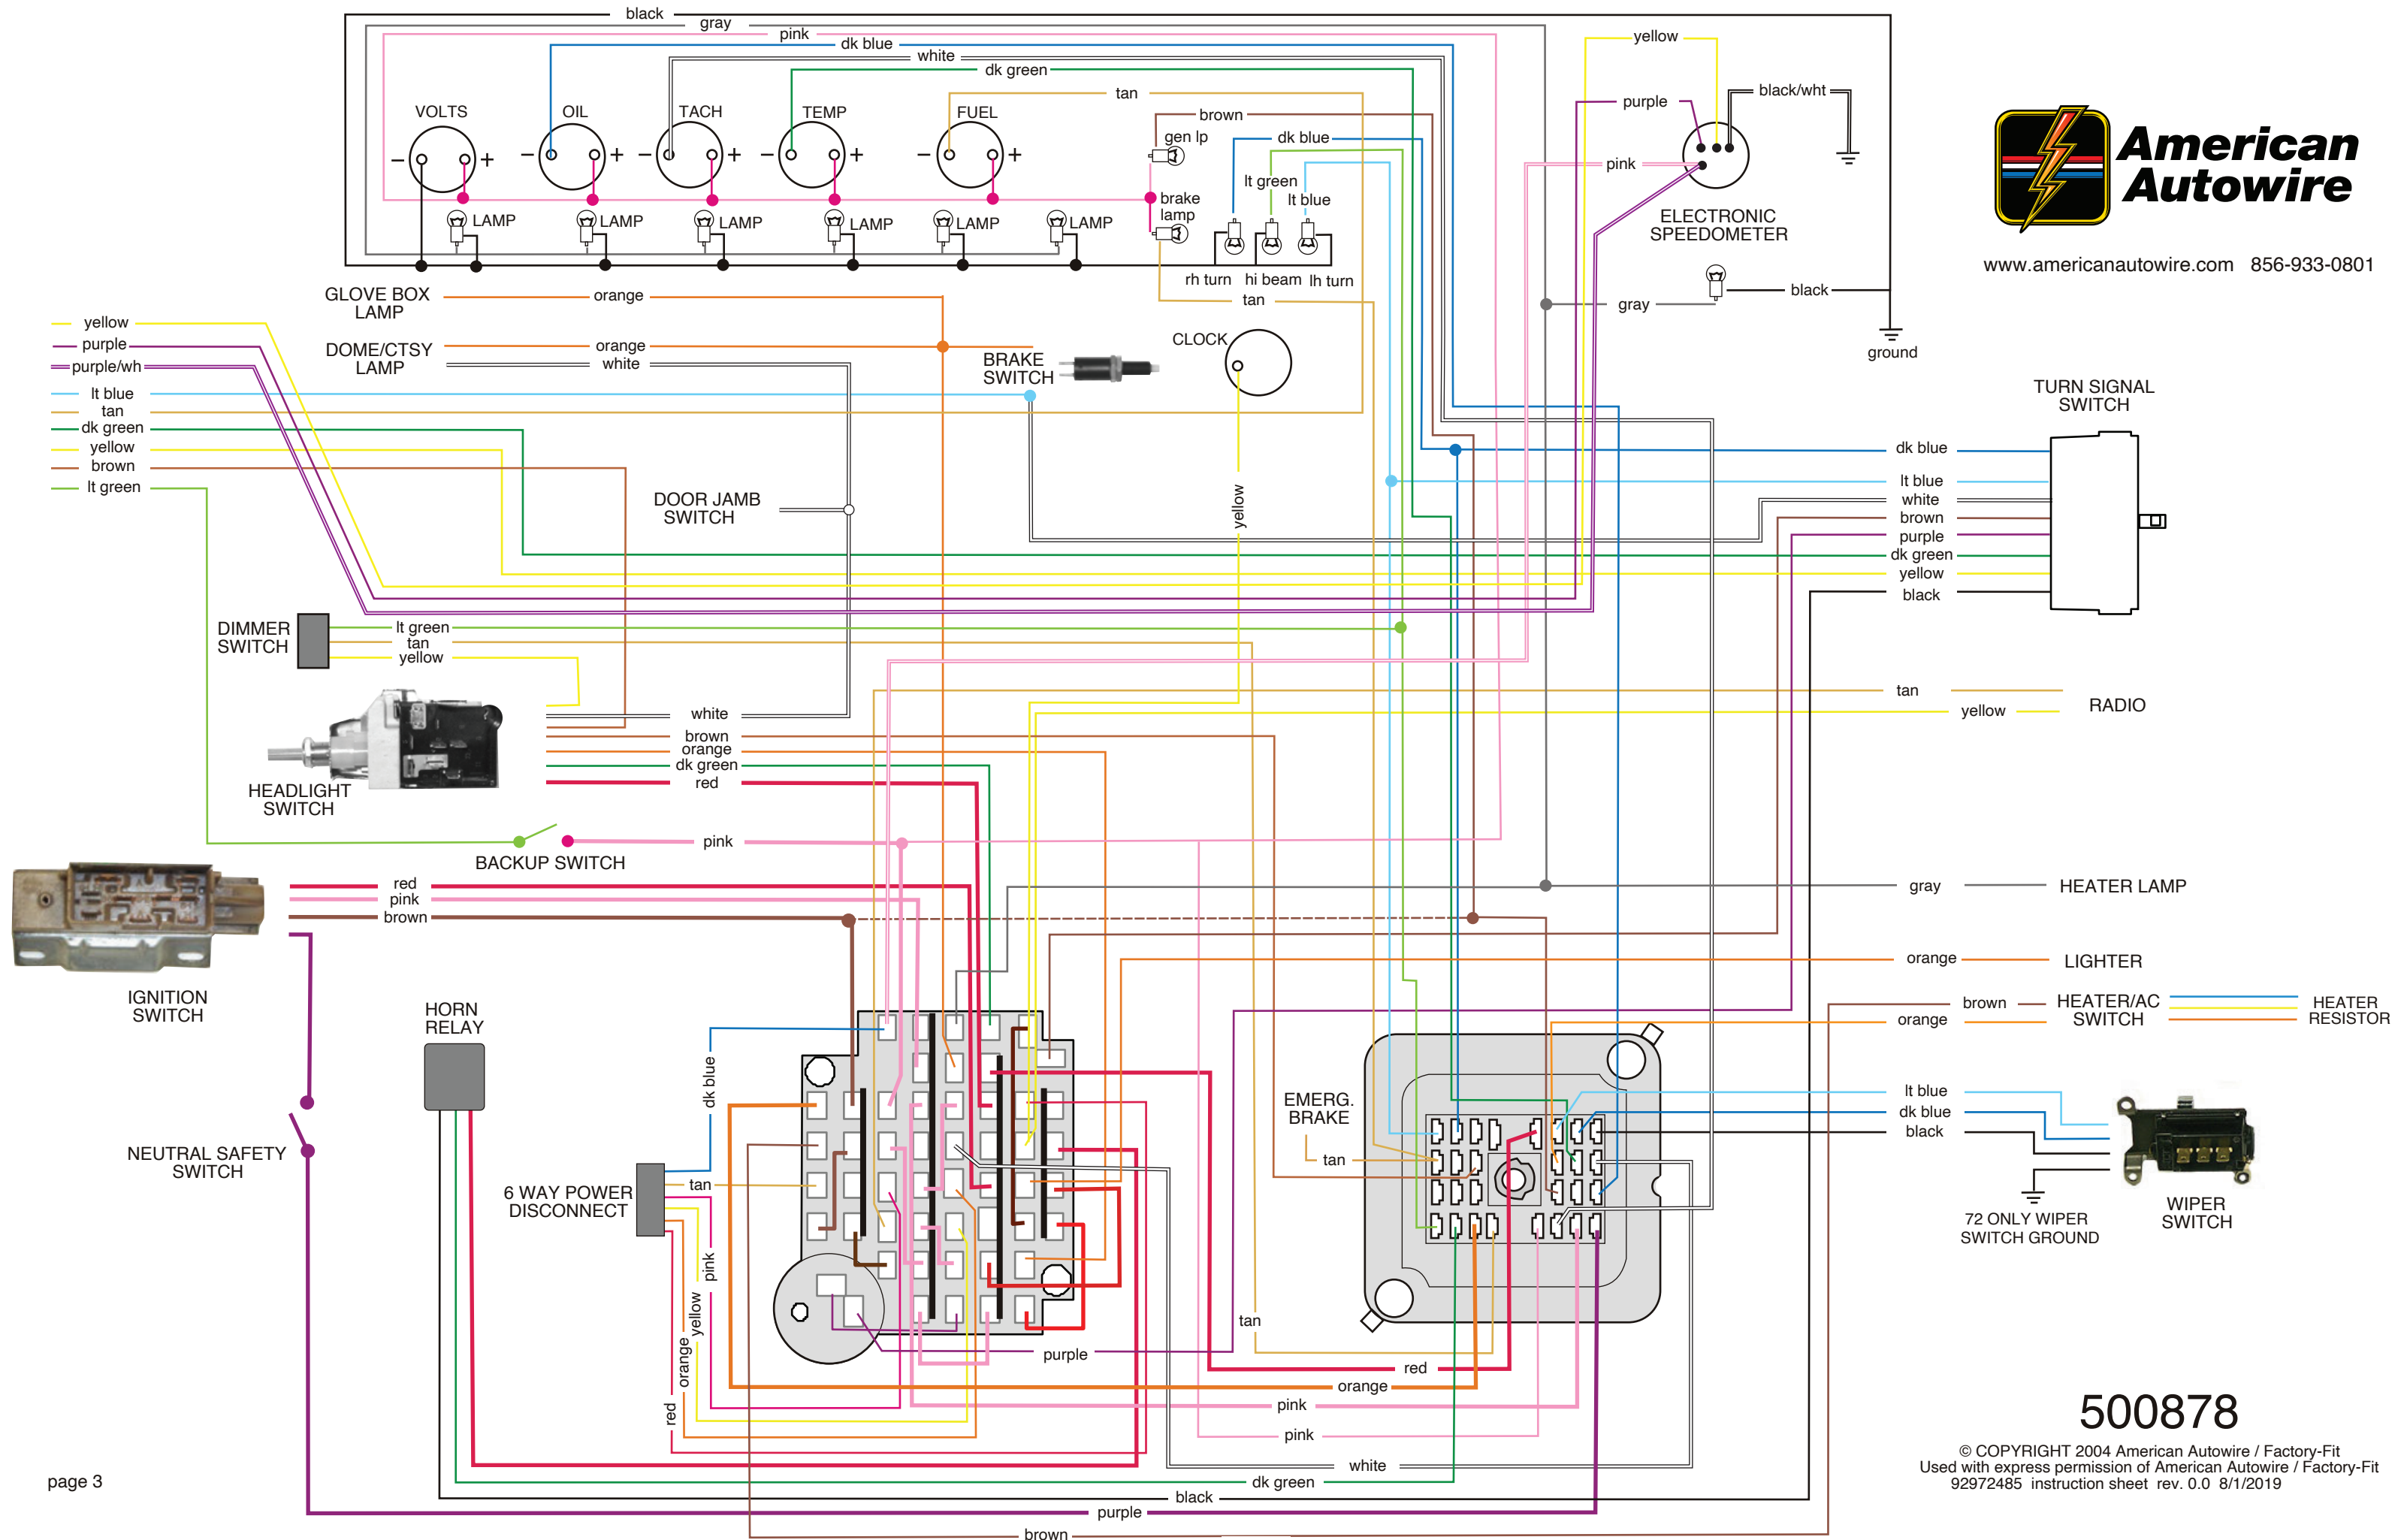


500878

© COPYRIGHT 2004 American Autowire / Factory-Fit
Used with express permission of American Autowire / Factory-Fit
92972485 instruction sheet rev. 0.0 8/1/2019

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK



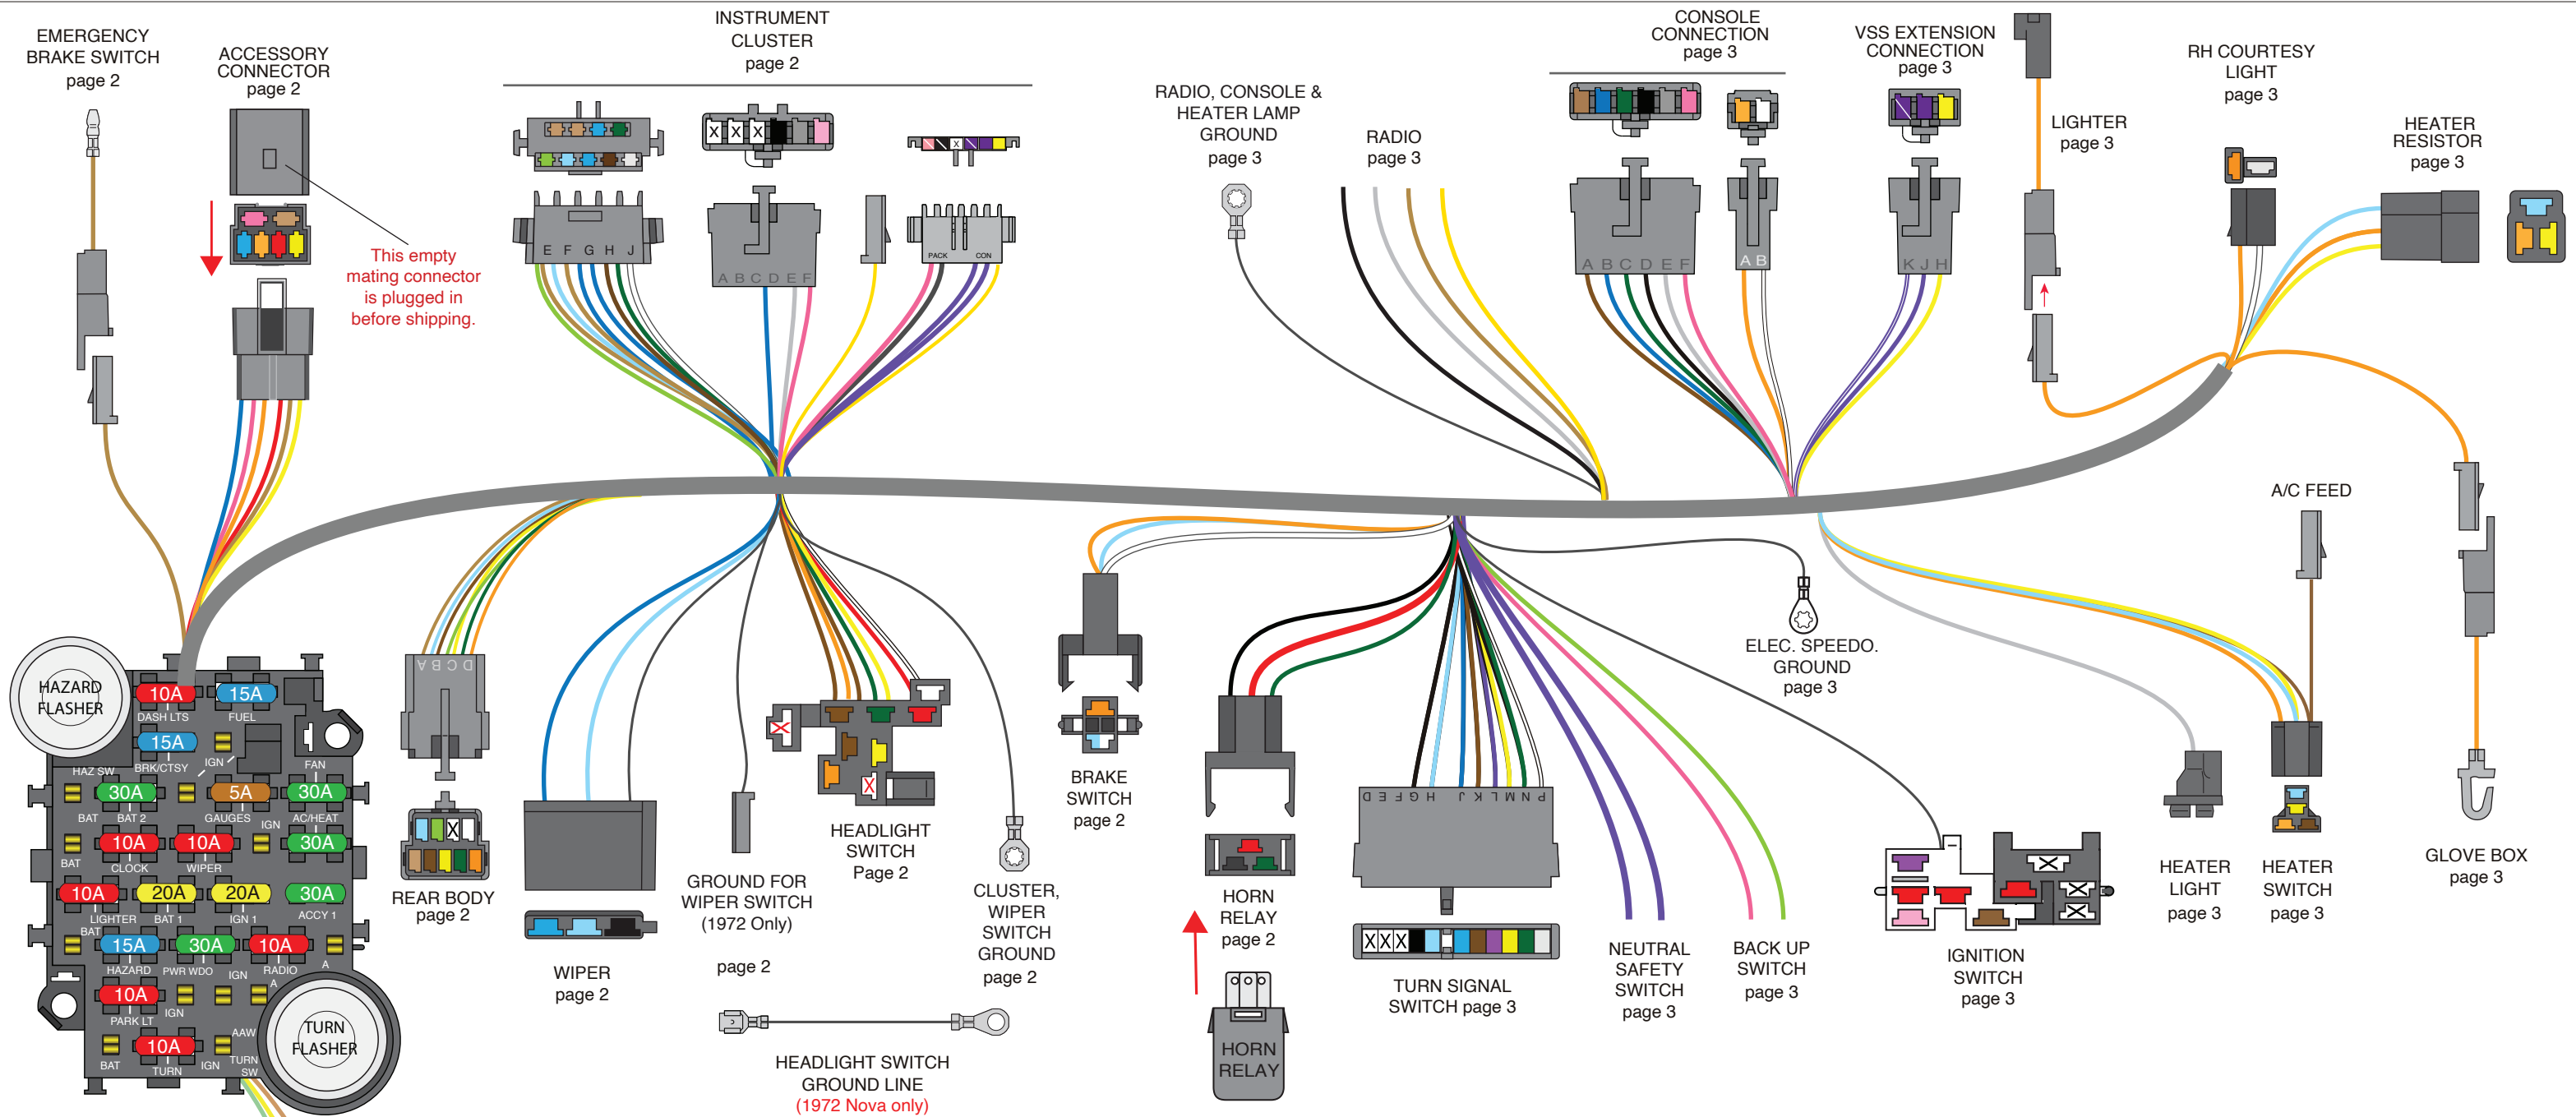

Fuse Panel Installation Instructions


Following these simple instructions will guarantee a successful installation of your American Autowire fuse panel harness.

1. Study the diagram above to familiarize yourself with the dash harness.
2. Install the fuse box.
3. Route the dash harness using the factory support straps.
4. Make all connections as shown on the following pages of this dash harness kit.
5. Once this harness is installed, continue to bag 'H', and install the rest of the kit (bags H,J,K,L,M).



**American
Autowire**


www.americanautowire.com 856-933-0801

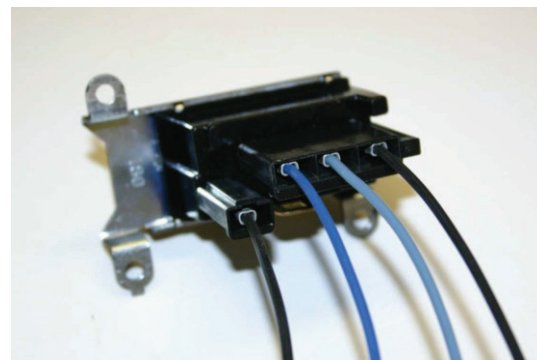


The above picture shows the orientation for **1972 Nova** wiper hook-up only. All other applications can only be plugged in one way.



Dimmer
Switch

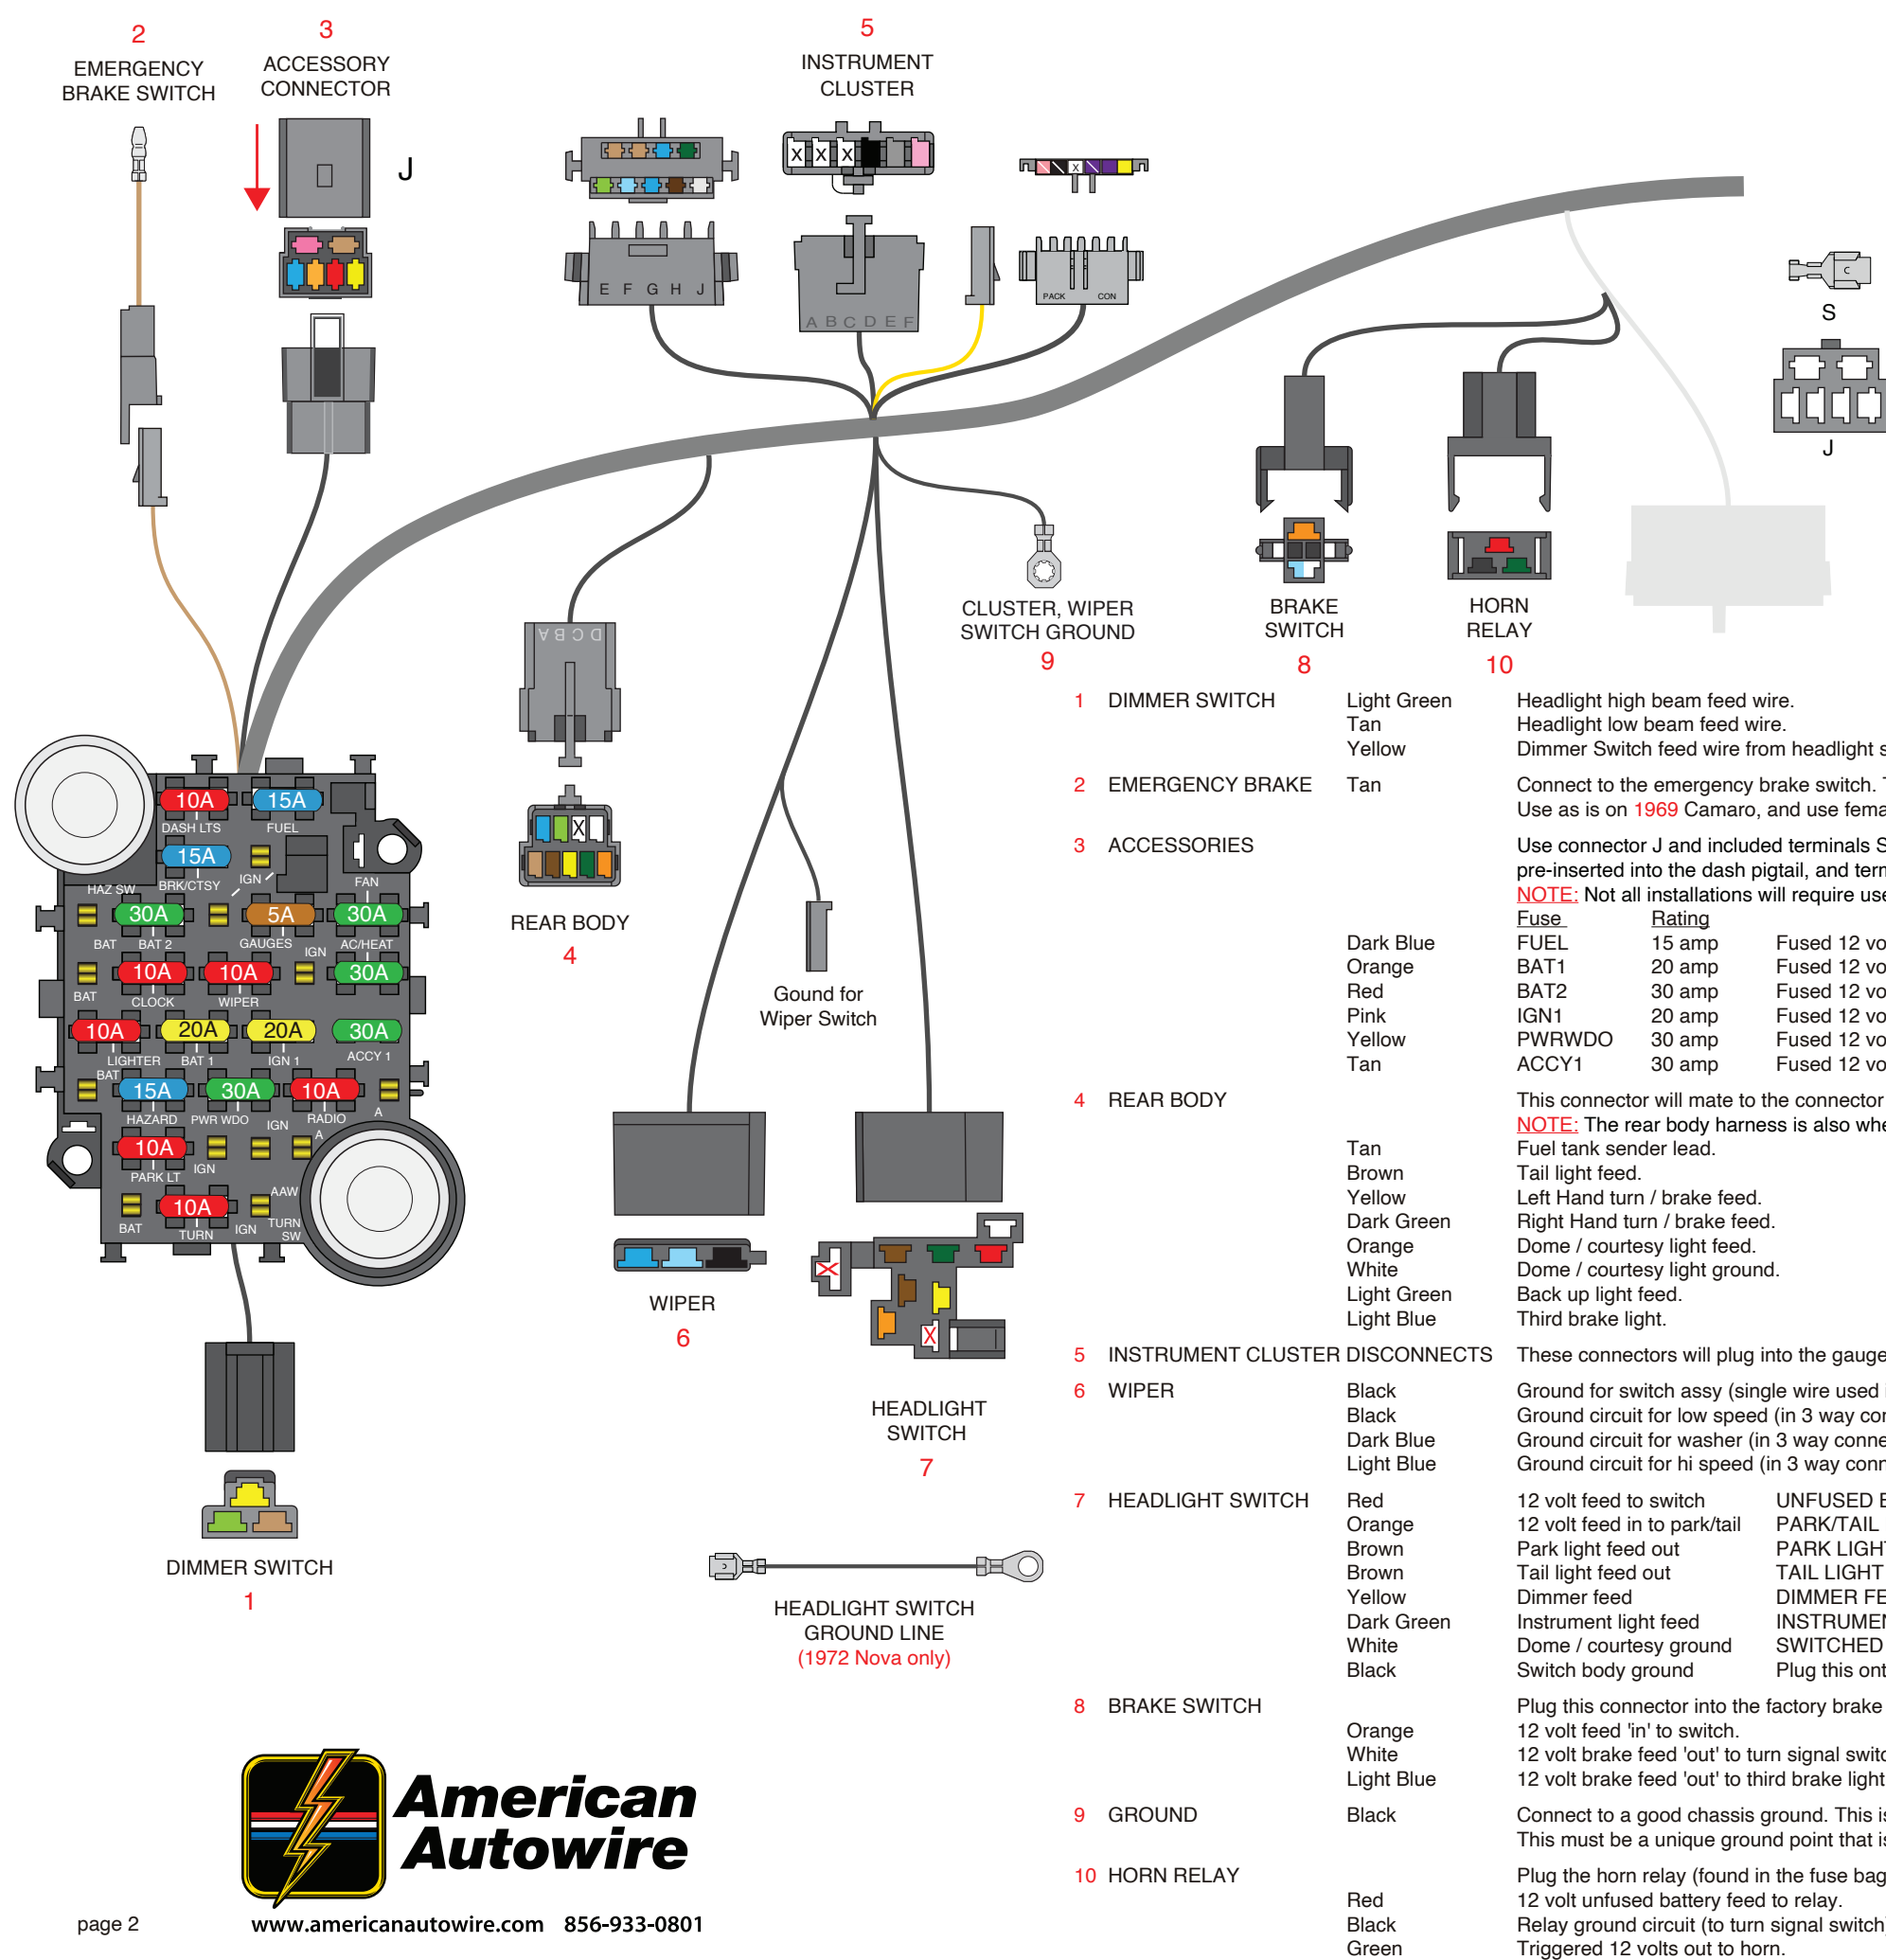

INSTALLING THE FUSE BOX

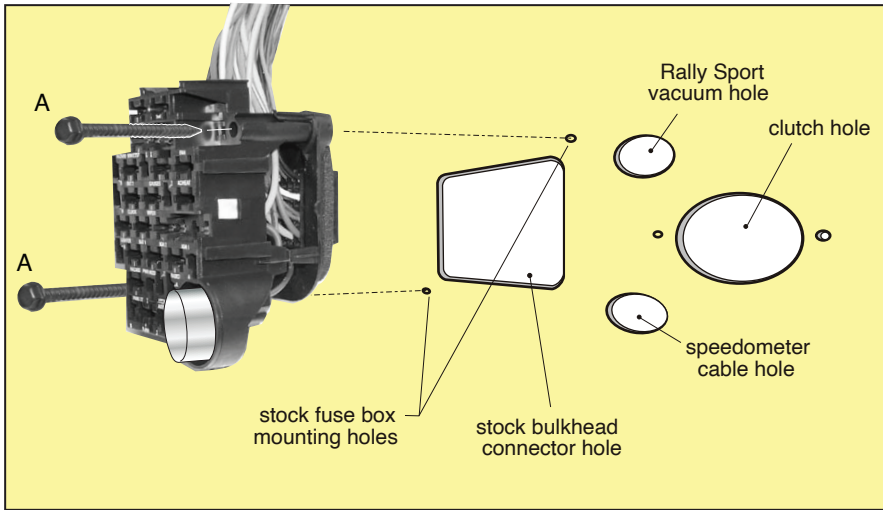

1. Locate the stock OEM bulkhead hole in the driver side of the firewall.
2. Mount the fuse box with the flasher can in the bottom right corner, as shown above.
3. Using the two mounting screws A, attach the fuse panel to the firewall.

1	DIMMER SWITCH	Light Green Tan Yellow	Headlight high beam feed wire. Headlight low beam feed wire. Dimmer Switch feed wire from headlight switch.																											
2	EMERGENCY BRAKE	Tan	Connect to the emergency brake switch. This is the ground circuit for the brake switch light. Use as is on 1969 Camaro, and use female connector on Nova applications.																											
3	ACCESSORIES		Use connector J and included terminals S for wires to be added to the in-dash accessory connector pigtail. The mating connector for these circuits will be pre-inserted into the dash pigtail, and terminals can be located in the dash loose piece kit along with the fuse panel mounting hardware. NOTE: Not all installations will require use of these connections. It was added to your kit as a convenient source for 12 volt power.																											
		<table><thead><tr><th></th><th>Fuse</th><th>Rating</th><th></th></tr></thead><tbody><tr><td>Dark Blue</td><td>FUEL</td><td>15 amp</td><td>Fused 12 volt IGNITION feed for fuel pump (may also be used to feed power to another ignition circuit).</td></tr><tr><td>Orange</td><td>BAT1</td><td>20 amp</td><td>Fused 12 volt BATTERY feed for power seats (may also be used to feed power to another battery circuit).</td></tr><tr><td>Red</td><td>BAT2</td><td>30 amp</td><td>Fused 12 volt BATTERY feed for power door locks (may also be used to feed power to another accessory circuit).</td></tr><tr><td>Pink</td><td>IGN1</td><td>20 amp</td><td>Fused 12 volt IGNITION feed for cruise control (may also be used to feed power to another ignition circuit).</td></tr><tr><td>Yellow</td><td>PWRWDO</td><td>30 amp</td><td>Fused 12 volt IGNITION feed for power windows (may also be used to feed power to another ignition circuit).</td></tr><tr><td>Tan</td><td>ACCY1</td><td>30 amp</td><td>Fused 12 volt ACCESSORY feed (may also be used to feed power to an accessory circuit).</td></tr></tbody></table>		Fuse	Rating		Dark Blue	FUEL	15 amp	Fused 12 volt IGNITION feed for fuel pump (may also be used to feed power to another ignition circuit).	Orange	BAT1	20 amp	Fused 12 volt BATTERY feed for power seats (may also be used to feed power to another battery circuit).	Red	BAT2	30 amp	Fused 12 volt BATTERY feed for power door locks (may also be used to feed power to another accessory circuit).	Pink	IGN1	20 amp	Fused 12 volt IGNITION feed for cruise control (may also be used to feed power to another ignition circuit).	Yellow	PWRWDO	30 amp	Fused 12 volt IGNITION feed for power windows (may also be used to feed power to another ignition circuit).	Tan	ACCY1	30 amp	Fused 12 volt ACCESSORY feed (may also be used to feed power to an accessory circuit).
	Fuse	Rating																												
Dark Blue	FUEL	15 amp	Fused 12 volt IGNITION feed for fuel pump (may also be used to feed power to another ignition circuit).																											
Orange	BAT1	20 amp	Fused 12 volt BATTERY feed for power seats (may also be used to feed power to another battery circuit).																											
Red	BAT2	30 amp	Fused 12 volt BATTERY feed for power door locks (may also be used to feed power to another accessory circuit).																											
Pink	IGN1	20 amp	Fused 12 volt IGNITION feed for cruise control (may also be used to feed power to another ignition circuit).																											
Yellow	PWRWDO	30 amp	Fused 12 volt IGNITION feed for power windows (may also be used to feed power to another ignition circuit).																											
Tan	ACCY1	30 amp	Fused 12 volt ACCESSORY feed (may also be used to feed power to an accessory circuit).																											
4	REAR BODY		This connector will mate to the connector from the Rear Body harness found in bag L NOTE: The rear body harness is also where the connections for the DRIVER SIDE COURTESY LIGHT and DOME LAMP extension will be built.																											
		Tan Brown Yellow Dark Green Orange White Light Green Light Blue	Fuel tank sender lead. Tail light feed. Left Hand turn / brake feed. Right Hand turn / brake feed. Dome / courtesy light feed. Dome / courtesy light ground. Back up light feed. Third brake light.																											
5	INSTRUMENT CLUSTER DISCONNECTS		These connectors will plug into the gauge disconnect harness from bag H. Wire identifications are described on the Instruction pages from bag H.																											
6	WIPER	Black Black Dark Blue Light Blue	Ground for switch assy (single wire used in 1972 Nova only) Ground circuit for low speed (in 3 way connector). Ground circuit for washer (in 3 way connector). Ground circuit for hi speed (in 3 way connector).																											
7	HEADLIGHT SWITCH	Red Orange Brown Brown Yellow Dark Green White Black	12 volt feed to switch 12 volt feed in to park/tail Park light feed out Tail light feed out Dimmer feed Instrument light feed Dome / courtesy ground Switch body ground UNFUSED BAT IN location on headlight switch. PARK/TAIL FEED IN location on headlight switch. PARK LIGHT OUT location on headlight switch. TAIL LIGHT OUT location on headlight switch. DIMMER FEED OUT location on headlight switch. INSTRUMENT LIGHT FEED OUT location on headlight switch. SWITCHED COURTESY GROUND location on headlight switch. Plug this onto male blade on side of H/L switch then ground ring terminal (for use on 1972 Nova applications only).																											
8	BRAKE SWITCH	Orange White Light Blue	Plug this connector into the factory brake switch. 12 volt feed 'in' to switch. 12 volt brake feed 'out' to turn signal switch. 12 volt brake feed 'out' to third brake light.																											
9	GROUND	Black	Connect to a good chassis ground. This is the ground circuit for the wiper switch and speedo cluster. This must be a unique ground point that is different from the #25 Electric Speedo Ground																											
10	HORN RELAY	Red Black Green	Plug the horn relay (found in the fuse bag) into this connector. 12 volt unfused battery feed to relay. Relay ground circuit (to turn signal switch). Triggered 12 volts out to horn.																											


1969 Camaro
1968-72 Nova

DASH KIT
510512

92972445 Rev 2.0 ADB



**American
Autowire**

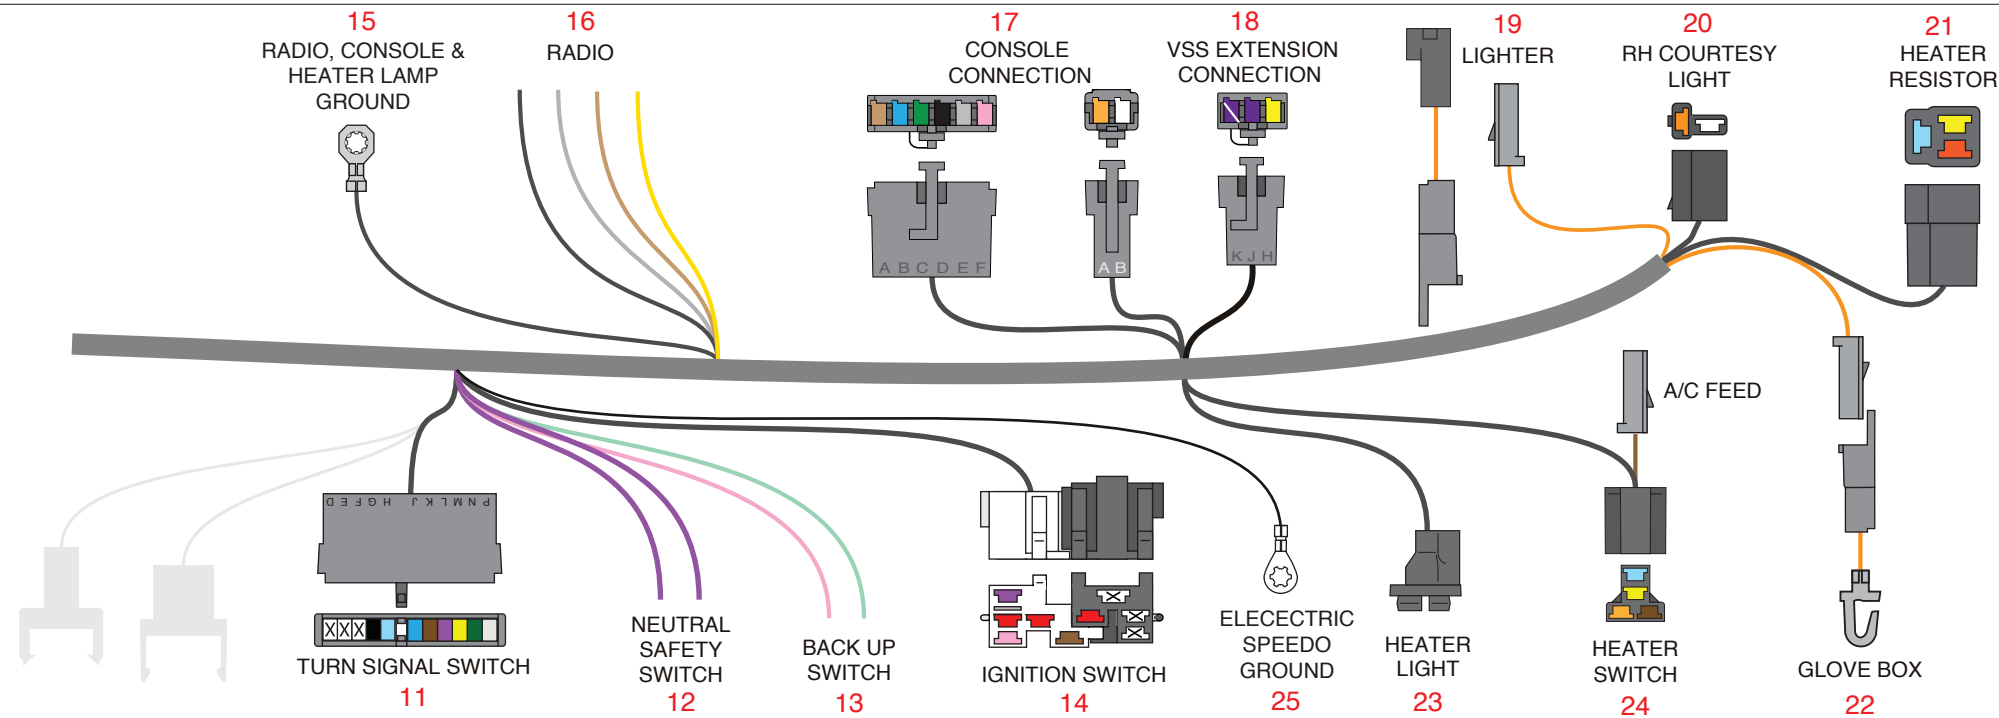

- 11

TURN SIGNAL SWITCH

This harness has a connector on it for the 3-7/8 1969-1974 GM column connection used by GM and many after-market manufacturers. If using a late model GM steering column or an after-market column using the 4-1/4 GM turn signal connector, replace existing connector with connector L, matching wires by color, as shown in Diagram G.

White	12 volt feed from brake switch.
Dark Green	Right Hand stop/turn light.
Yellow	Left Hand stop/turn light.
Purple	12 volt feed from turn flasher.
Brown	12 volt feed from hazard flasher.
Dark Blue	Right Hand front turn light.
Light Blue	Left Hand front turn light.
Black	Horn relay ground wire to horn switch.
- 12

NEUTRAL SAFETY SWITCH

Connect these wires to the neutral safety switch on the column or console shifter. For **MANUAL TRANSMISSIONS**, connect to the clutch switch on the 69-72 models, or connect these wires together on a 1968 model. Some aftermarket transmissions will have their own NSS built into the transmission. Please refer to their instruction documents for making these connections.

Purple	12 volt feed 'in' to neutral safety switch from ignition switch.
Purple	12 volt feed 'out' to starter solenoid.
- 13

BACK UP SWITCH

Connect these wires to the back up switch on the column or console shifter.

Pink	12 volt ignition feed 'in' to back up light switch
Lt Green	12 volt feed 'out' from back up light switch to back up lights.
- 14

IGNITION SWITCH

Note: Connectors are included if you are using a stock 1969-72 ignition switch as shown in Diagram H.

Red	12 volt battery feed "in".
Pink	12 volt ignition feed "out".
Brown	12 volt accessory feed "out".
Purple	Starter lead "out" to Neutral Safety Switch.
- 15

GROUND

Black	Connect to a good chassis ground. This is the ground circuit for the radio, console and heater lamp. This must be a unique ground point that is different from the #25 Electric Speedo Ground.
-------	--
- 16

RADIO

Tan	Radio accessory feed. (Keyed power wire for stock or aftermarket radio. Protected by Radio fuse.)
Yellow	Radio 12 volt clock lead (Constant power for radio. Protected by Clock fuse.) (Loose piece terminals & connectors have been provided for stock radio hook up.)
Black	Radio ground for stock 1970-72 radio (or aftermarket if necessary).
Gray	Radio light feed for stock 1970-72 radio (or aftermarket if necessary).
- 17

CONSOLE CONNECTION

These wires are for use on a console vehicle. For wire functions, refer to bag K, 500664.
- 18

VSS EXTENSION

These wires are for use with an aftermarket electric speedometer only. The VSS Lead Wires, 510730, bag V, will plug on here. Refer to that instruction page for wire CONNECTION functions and additional directions.
- 19

LIGHTER

Orange	Connect to lighter. (battery feed)(use as is with extension for Camaro or remove extension for use on Nova)
--------	---
- 20

RH COURTESY LIGHT

Plug this connector into the mating connector from the courtesy light kit bag N, 500708.

Orange	12 volt battery feed to light.
White	Ground circuit for light.
- 21

HEATER RESISTOR

Plug this connector onto the factory heater resistor located on top of the heater box on non-A/C cars only.
- 22

GLOVE BOX LIGHT

Orange	Connect to the original factory glove box light switch. If not using, just unplug and tape back.
--------	--
- 23

HEATER LIGHT

Gray	Heater control light feed.
Black	Heater control light ground.
- 24


HEATER SWITCH

Plug this connector onto the factory heater switch.

Brown	12 volt accessory feed to heater / A/C switch (if using factory or aftermarket a/c, use the short brown wire as the accessory feedwire to your A/C harness. If a new A/C harness is needed, please refer to Table A, at right).
Yellow	Heater resistor.
Lt Blue	Heater resistor.
Orange	Heater resistor.
- 25

GROUND

Black/Wht	Connect to a good chassis ground. This is the ground circuit for the electric speedometer. This must be a unique ground point from #'s 9 or 15.
-----------	---

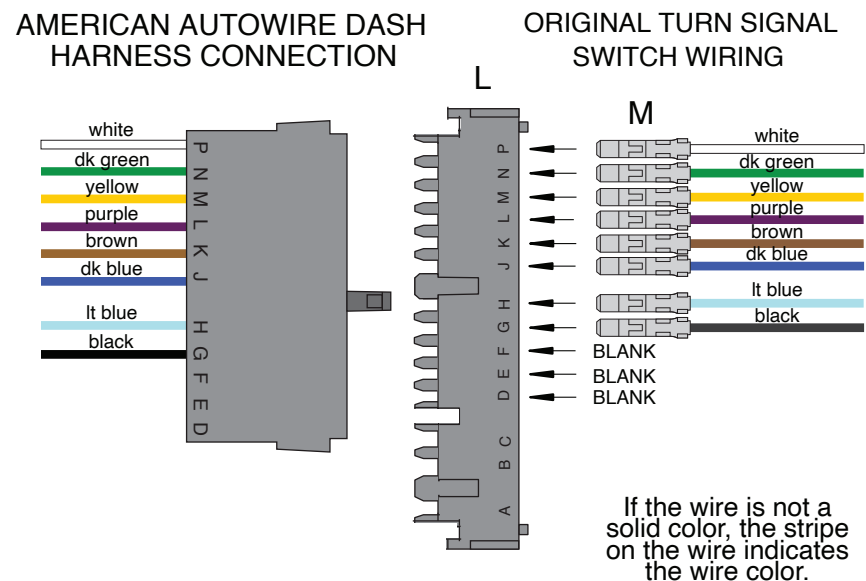

AAW Turn Signal Switch Wires to Stock Steering Columns.

DIAGRAM G

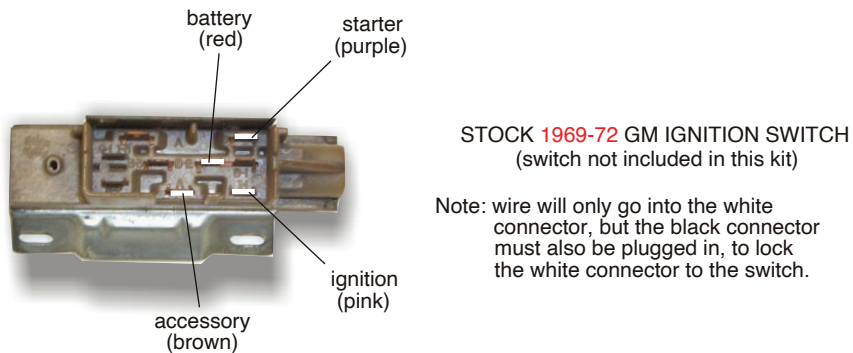


DIAGRAM H

Factory A/C Harnesses

1968 Nova	NV85279
1969 Camaro, 1969-70 Nova	CA97546
1971 Nova	NV11892
1972 Nova	NV28041

TABLE A



**American
Autowire**

1969 Camaro
1968-72 Nova

**DASH KIT
510512**

THIS PAGE HAS BEEN
INTENTIONALLY LEFT BLANK



**American
Autowire**

www.americanautowire.com 856-933-0801

1969 Camaro
1969-72 Nova
**DASH KIT
510512**

92972445 Rev 2.0 ADB 05/23/2025

Classic Update Series

REFER TO SHEETS 2-5 FOR CONNECTING TO A STOCK INSTRUMENT CLUSTER. IF USING A FACTORY DASH CIRCUIT BOARD, BE SURE TO INSTALL THE WIRES AS SHOWN FOR WITH OR WITHOUT, FACTORY GAUGES.

NOTE: If you are using console gauges, connections for the console are included in 500664 kit (bag K). Refer to sheet 6 for generic directions to connect after market gauges. Terminals have been provided in the (92965220) loose piece kit.

CONNECTOR E - Plug this connector into the mating connector on the dash harness (bag G) and connect wires as follows:

DARK BLUE	Right Dash Indicator	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.
LIGHT BLUE	Left Dash Indicator	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.
LIGHT GREEN	Hi Beam Indicator Light	Route this wire to the high beam light socket location at the top of the instrument cluster, and cut to length. Install lamp socket B, and rivet A. Install this into the hi beam hole on the instrument cluster.
DARK GREEN	Water Temp Sender	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.
DARK BLUE	Oil Pressure Sender	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5. (Note: Valid only on an original warning light cluster.)
TAN	Gas Gauge	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.
TAN (no printing)	Brake Light Switch	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.

CONNECTOR G - Plug this connector into the mating connector on the dash harness (bag G) and connect wires as follows:



PINK	12v Ignition	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.
GRAY	Dash Lights	Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector D in the location shown on sheet 2, 3, 4, or 5.
BLACK	Ground (Camaro)	Route this wire to the instrument cluster and cut to length. Install ring terminal E and attach to the cluster's metal housing. This will ground the housing.
	(Nova)	Route this wire to the instrument cluster and cut to length. Install terminal J, plug into connector K and install onto cluster ground. This will ground the cluster.

CONNECTOR H - The wires in this connector are used ONLY with an electronic speedometer.


PURPLE	VSS Signal	This wire will plug into the dash harness connection in bag G. Connect the other end to the speedometer 'sender' terminal following the manufacturer's instructions.
YELLOW	VSS Ground	This wire will plug into the dash harness connection in bag G. Connect the other end to the ground terminal "-" on the speedometer following the manufacturer's instructions.
PURPLE/WHITE	VSS Power	This wire will plug into the dash harness connection in bag G. Connect the other end to the speedometer sender 'power' terminal following the manufacturer's instructions.
PINK	Speedo Power	This wire will plug into the dash harness connection in bag G. Connect the other end to the speedometer 'power' terminal following the manufacturer's instructions.
BLACK/WHITE	Speedo Ground	This wire will plug into the dash harness connection in bag G. Connect the other end to a good cluster ground following the manufacturer's instructions.

LOOSE WIRES

WHITE	Coil--> Tach	Used ONLY with a tachometer. Plug this wire into connector F, maintaining color continuity with the white "TACH" wire on the mating dash connector.
YELLOW	Clock Feed	If using a factory Tick-Tock Tach (68 Camaro) or dash mounted clock on any 1968-72 Nova, plug this wire onto the clock location (on the tach of a 68 Camaro) on the dash, and attach the other end to the mating connector on the dash harness.
BROWN	Alternator Ign	Used with a stock generator lamp. Route this wire to the circuit board and cut to length. Install terminal C, and plug into connector F in the location shown on sheet 2, 3, 4, or 5.

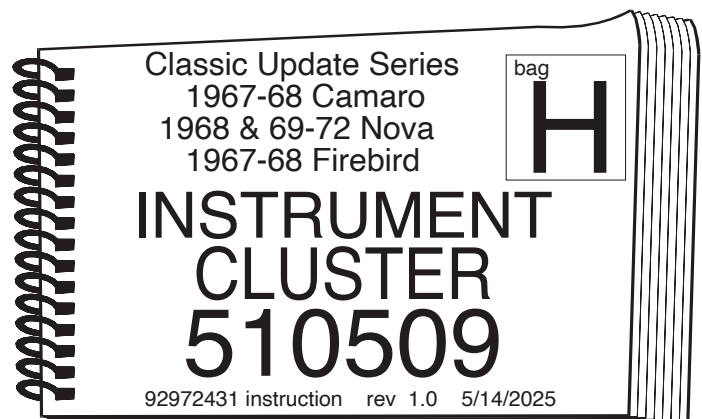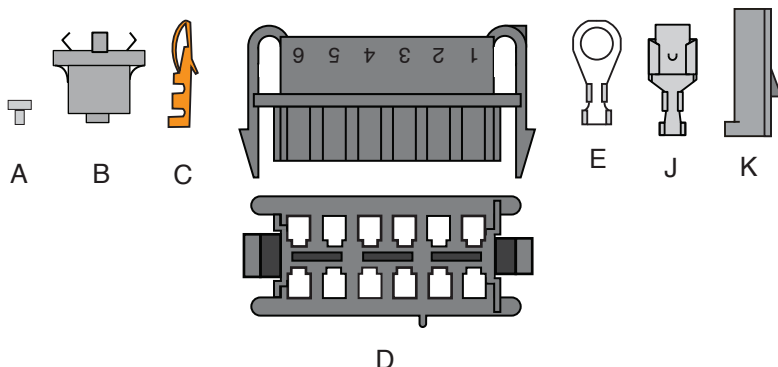


Classic Update Series

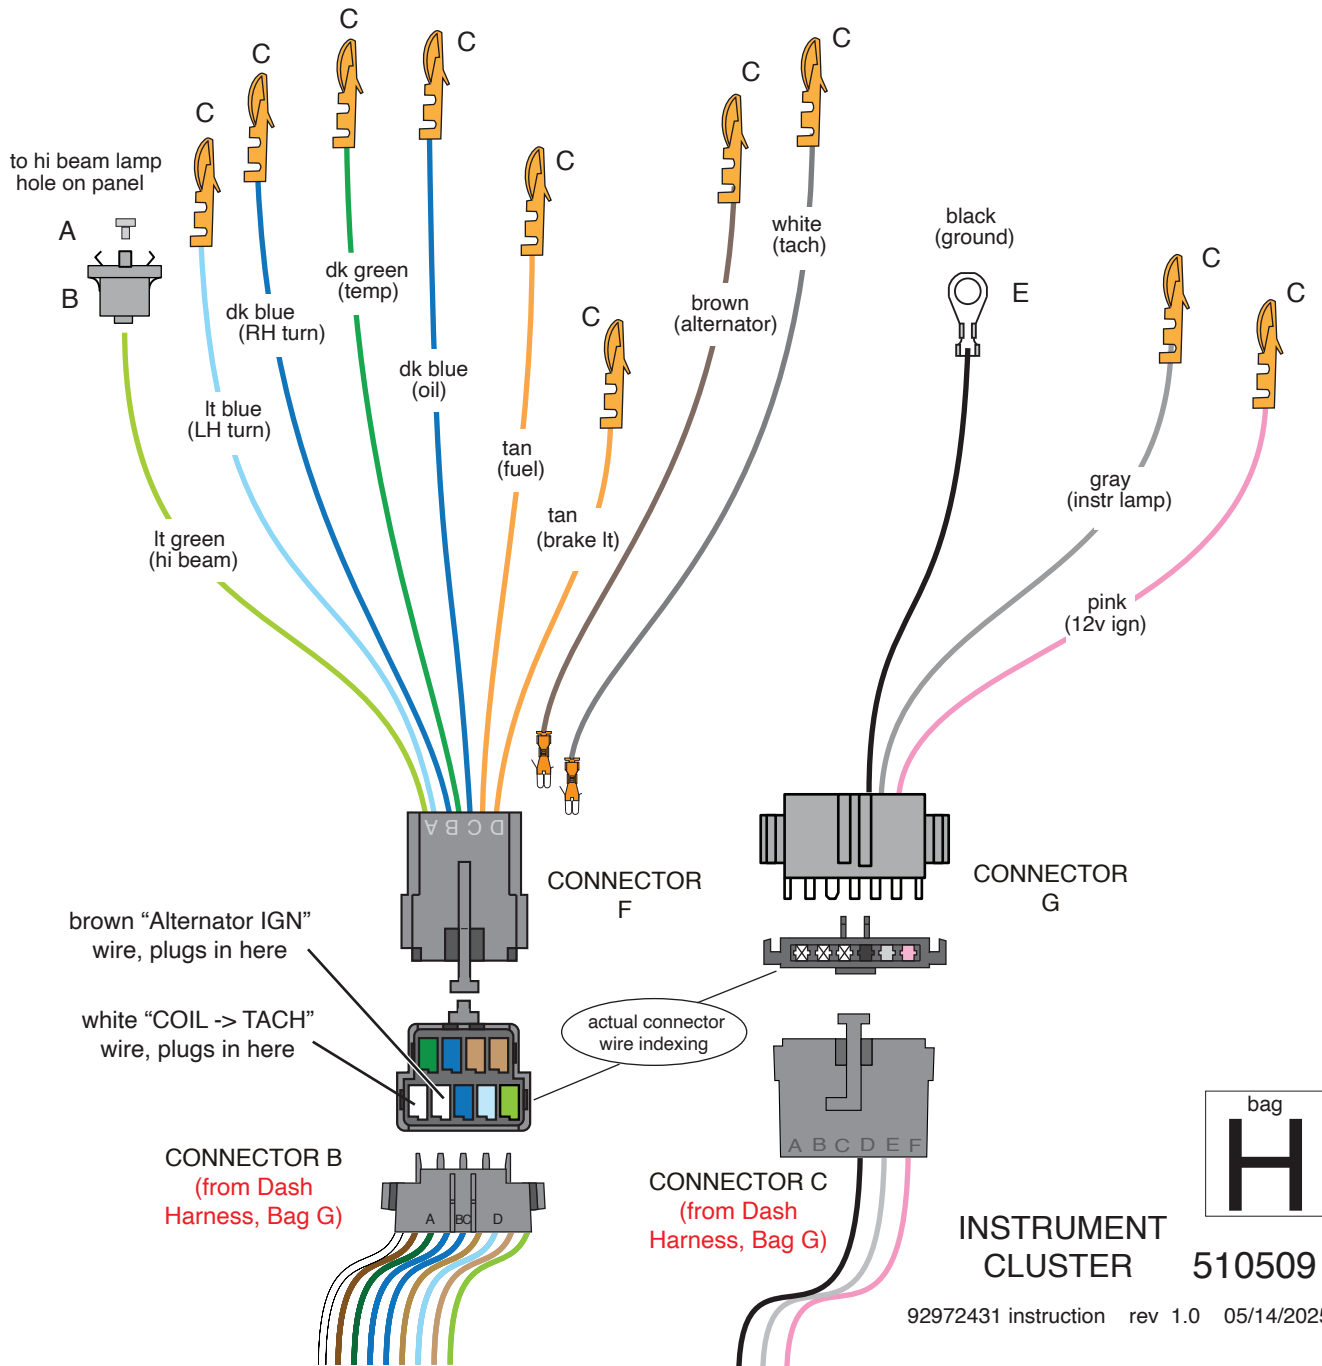



USE THIS SHEET TO CONNECT TO AN ORIGINAL 1968 CAMARO
FACTORY INSTRUMENT CLUSTER WITH A CIRCUIT BOARD CONNECTION

NOTE: This kit will not support the use of a factory installed ammeter

CIRCUIT BOARD CONNECTOR
WITHOUT CONSOLE GAUGES

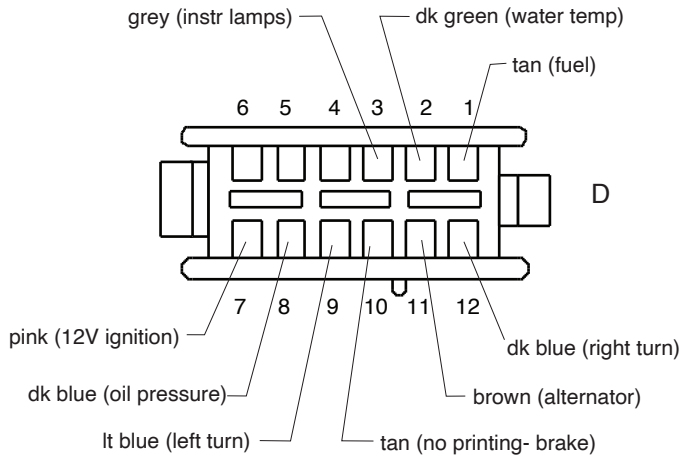


CIRCUIT BOARD CONNECTOR
WITH CONSOLE GAUGES

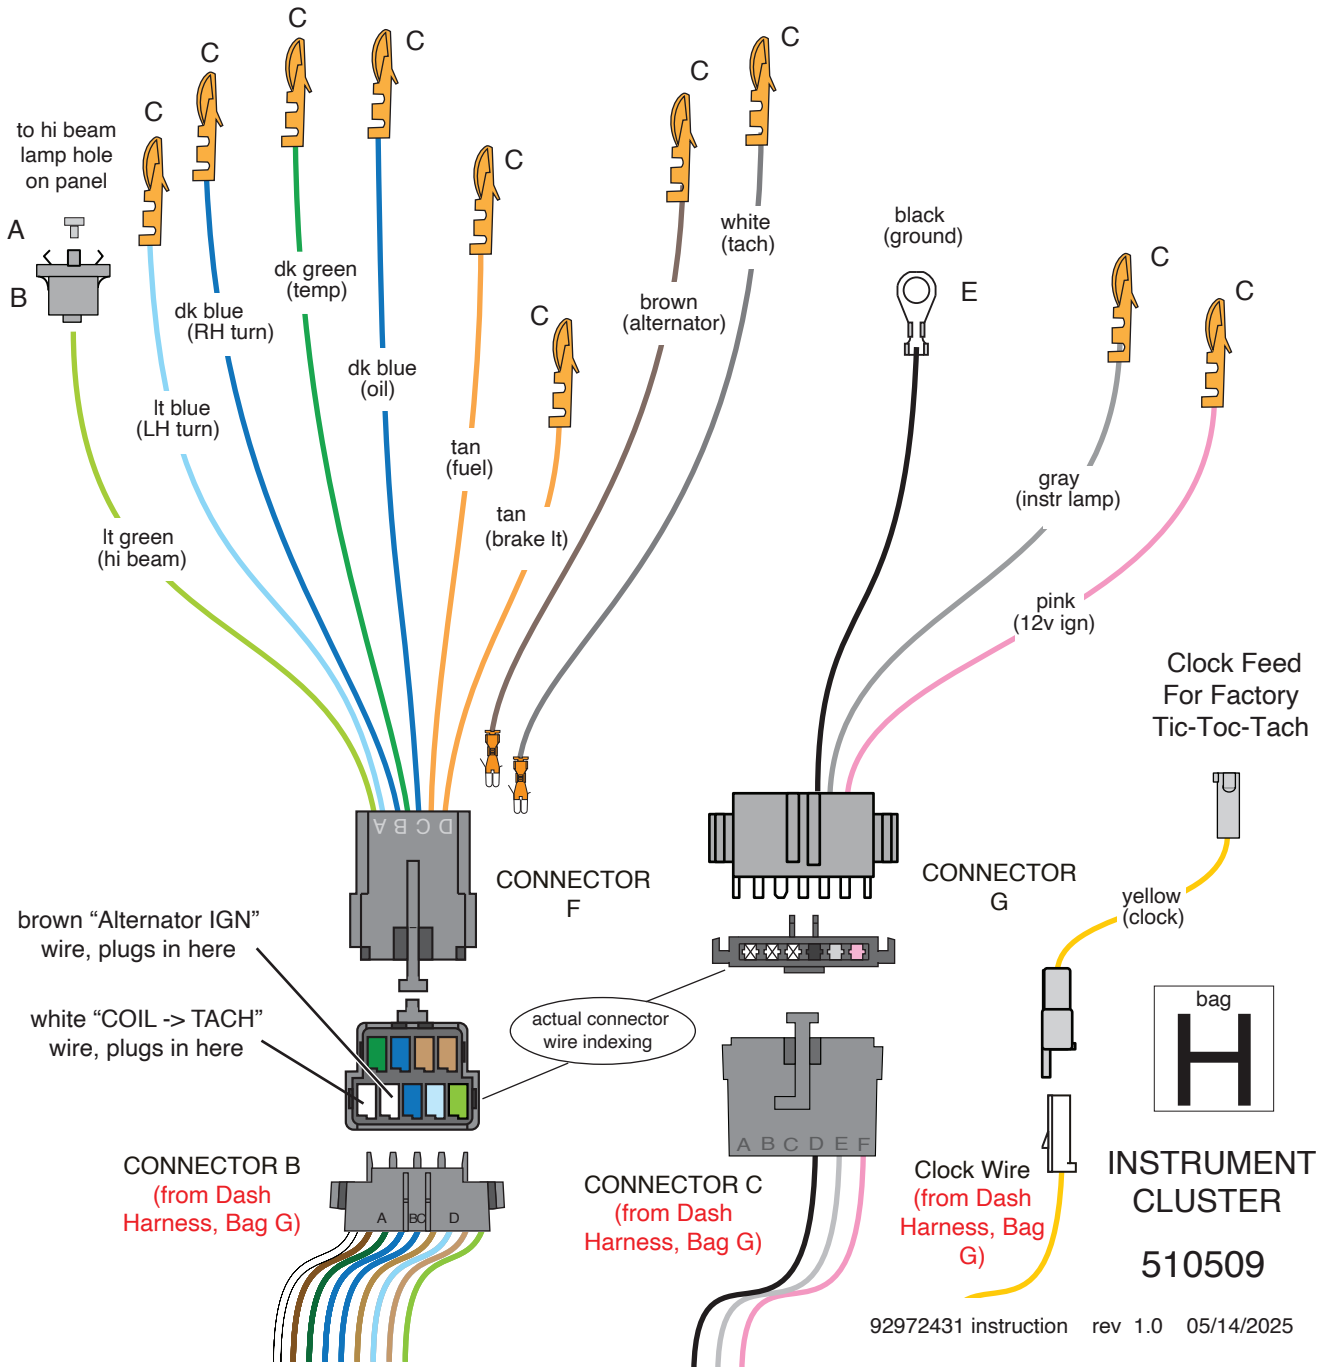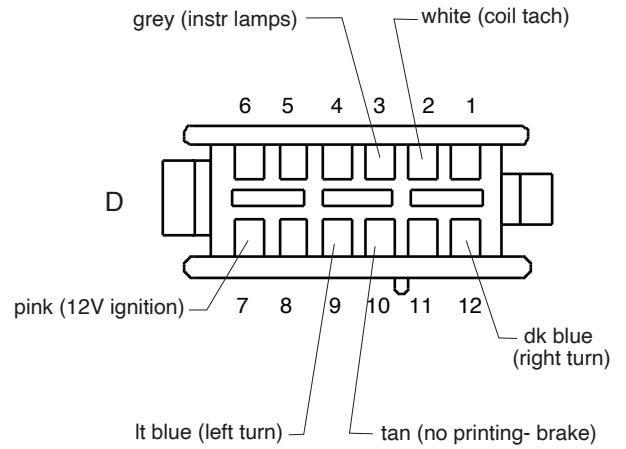



USE THIS SHEET TO CONNECT TO AN ORIGINAL 1968 and 1969-72 NOVA
FACTORY INSTRUMENT CLUSTER WITH A CIRCUIT BOARD CONNECTION

NOTE: This kit will not support the use of a factory installed ammeter

CIRCUIT BOARD CONNECTOR
WITHOUT CONSOLE GAUGES

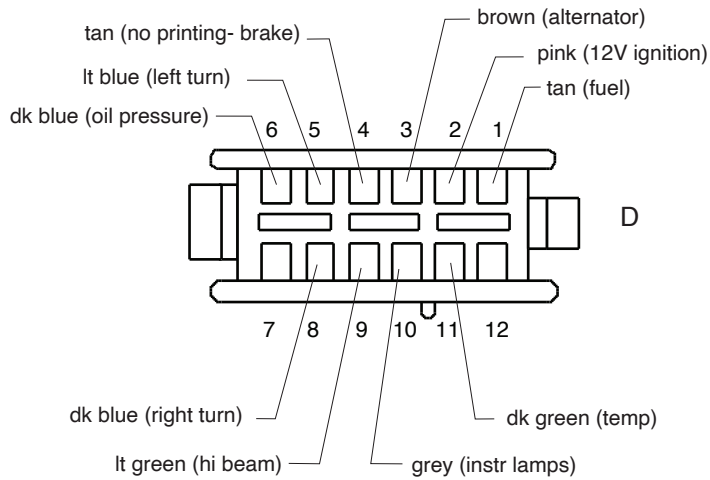

CIRCUIT BOARD CONNECTOR
WITH CONSOLE GAUGES

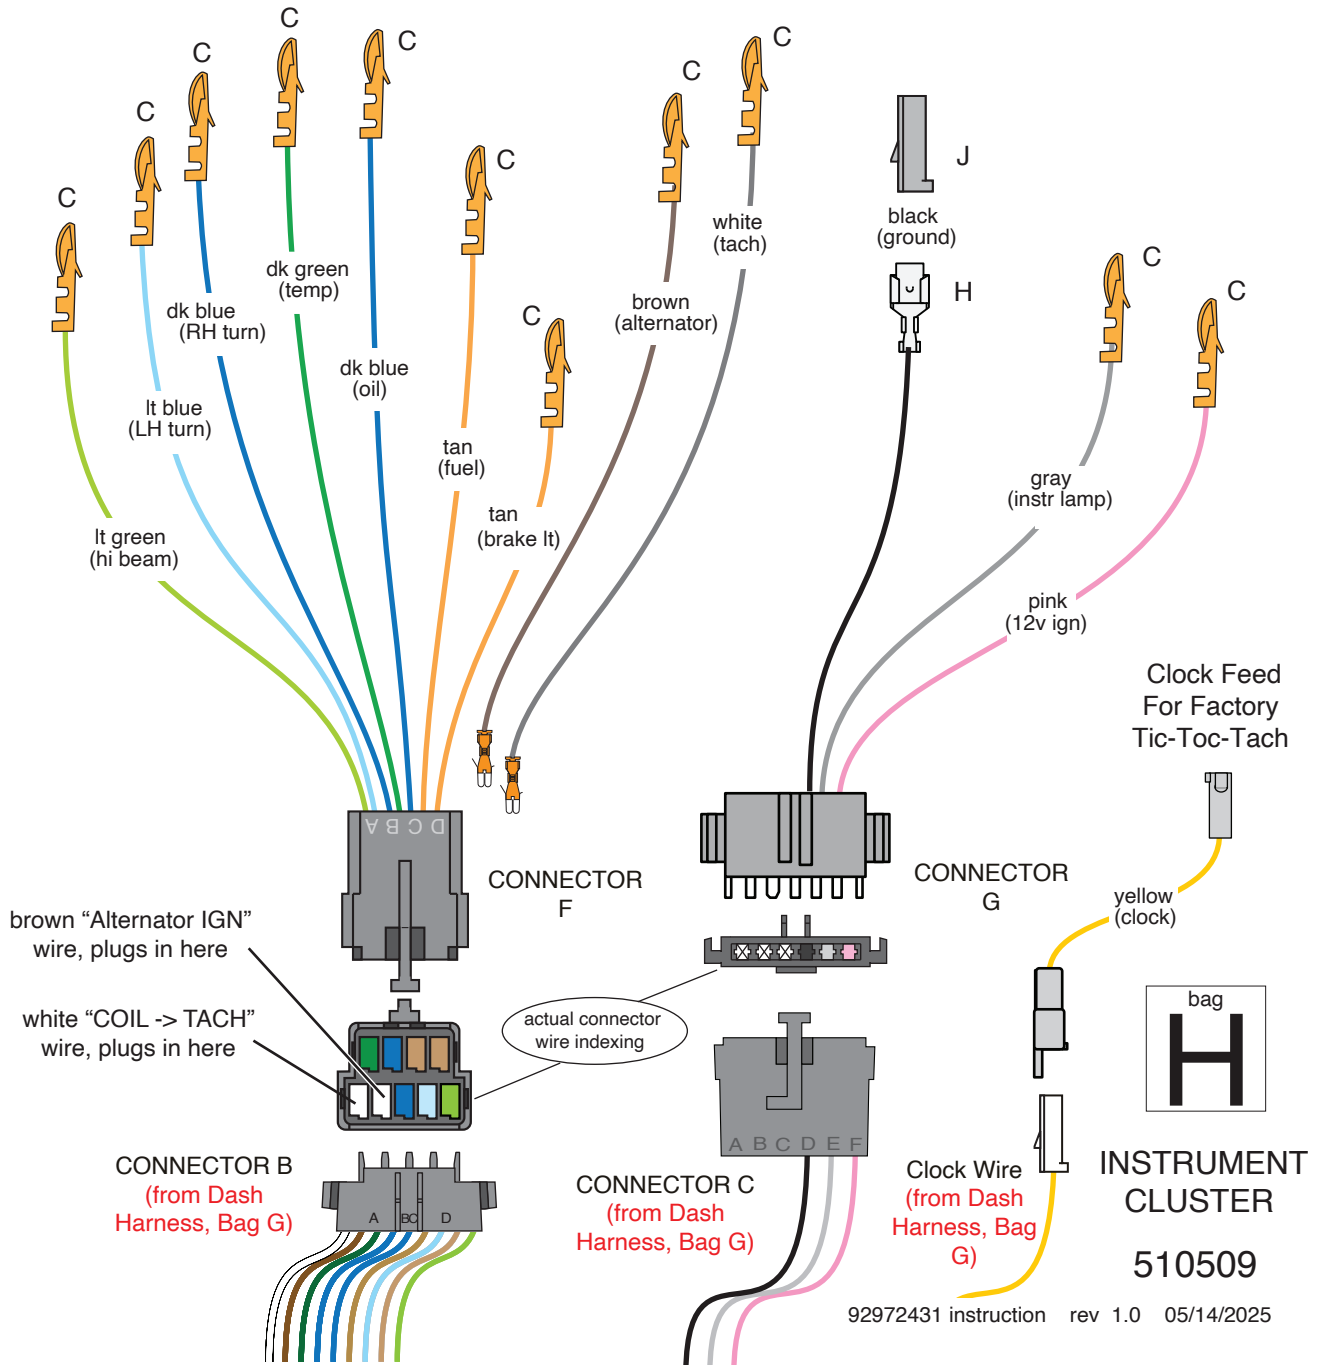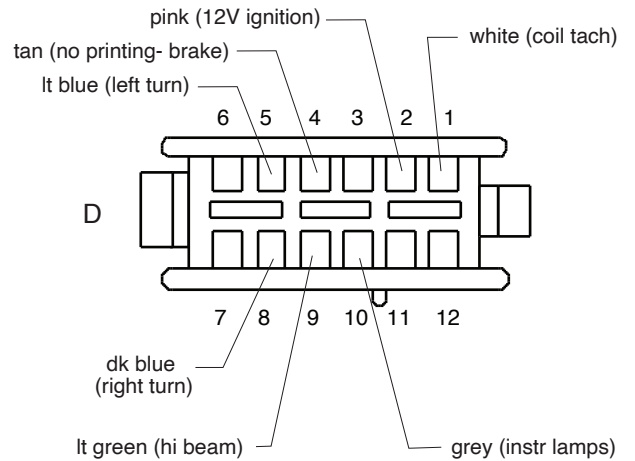


Classic Update Series



USE THIS SHEET TO CONNECT TO AN ORIGINAL 1967-68 **FIREBIRD**
FACTORY INSTRUMENT CLUSTER WITH A CIRCUIT BOARD CONNECTION

NOTE: This kit will not support the use of a factory installed ammeter


CIRCUIT BOARD CONNECTOR
WITHOUT GAUGES

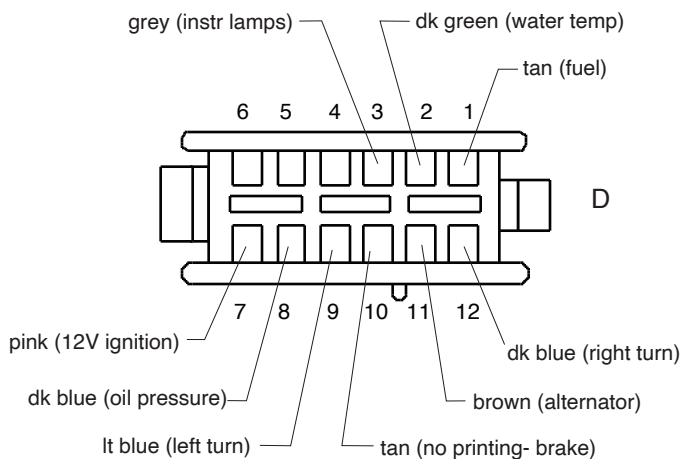

CIRCUIT BOARD CONNECTOR
WITH GAUGES

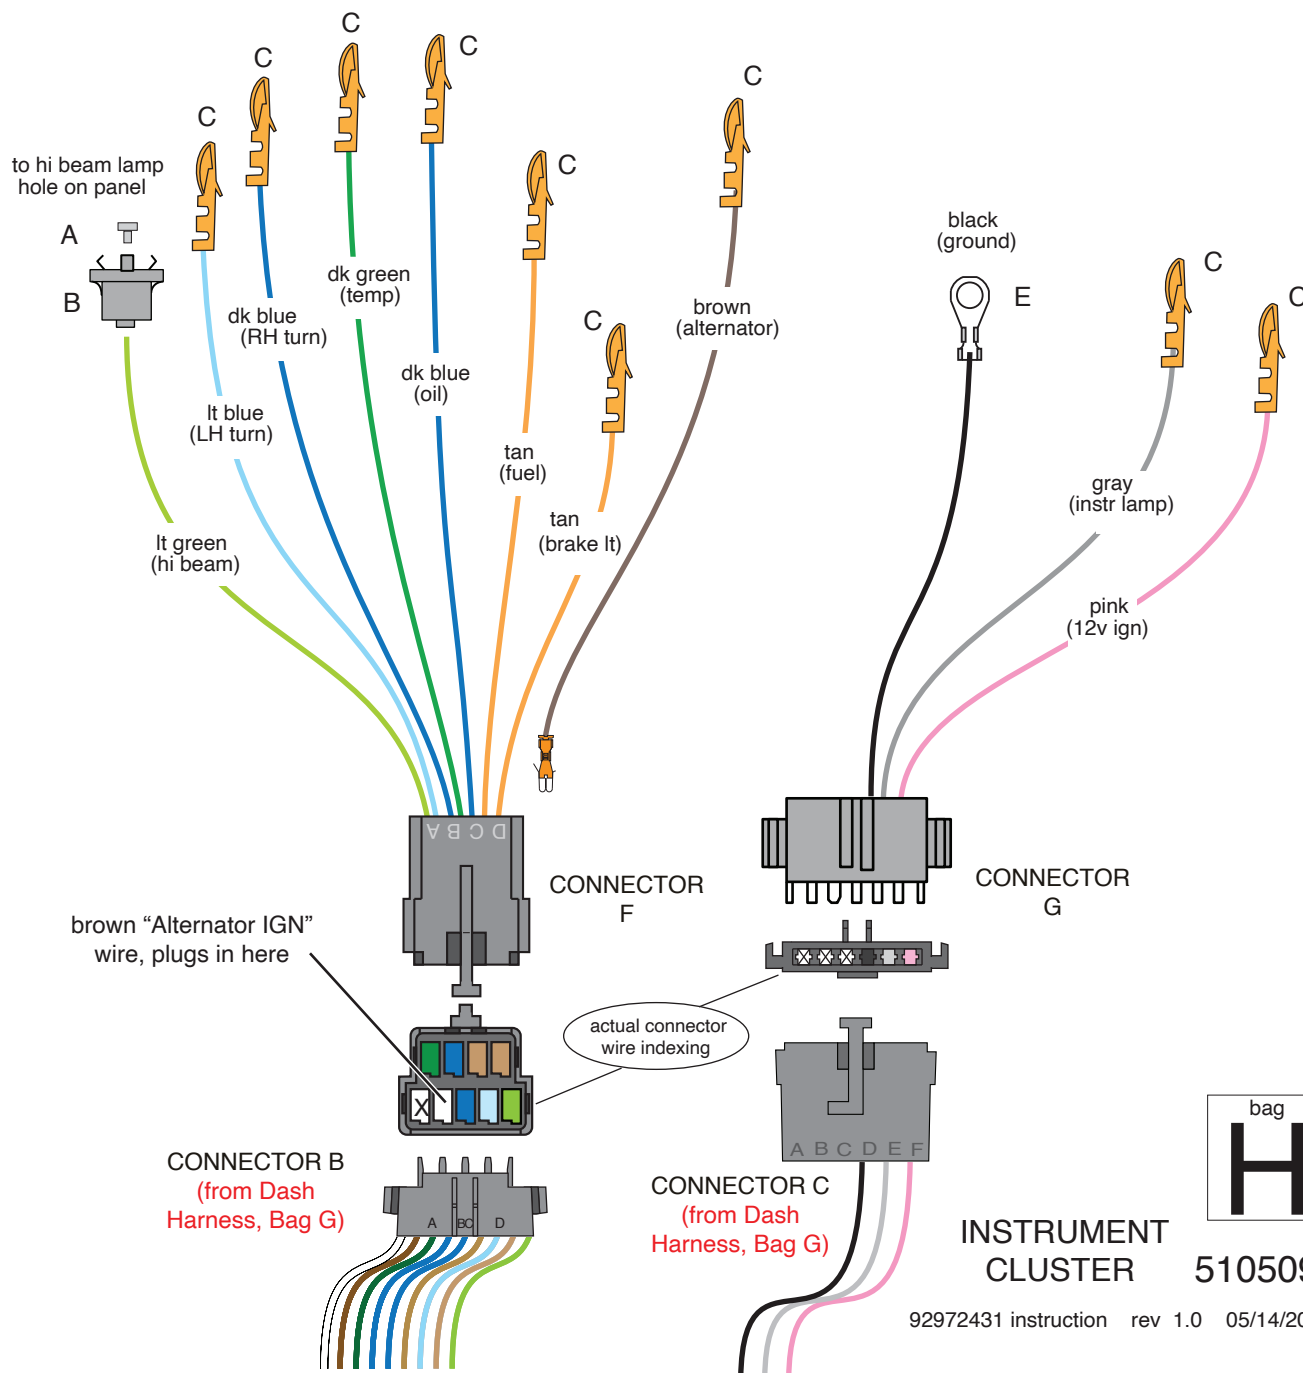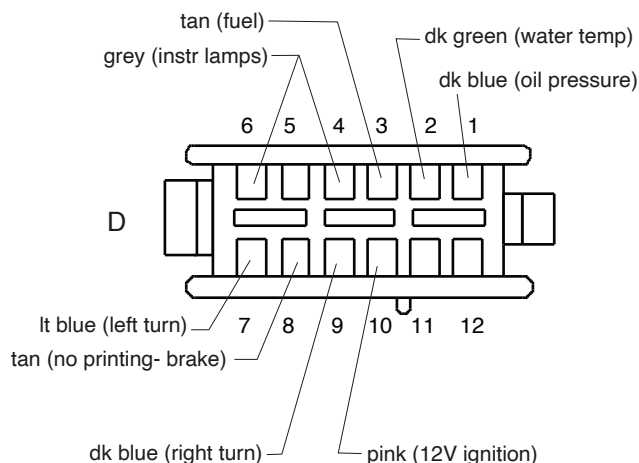

Gauge Cluster harness (aftermarket gauges) installation instructions:

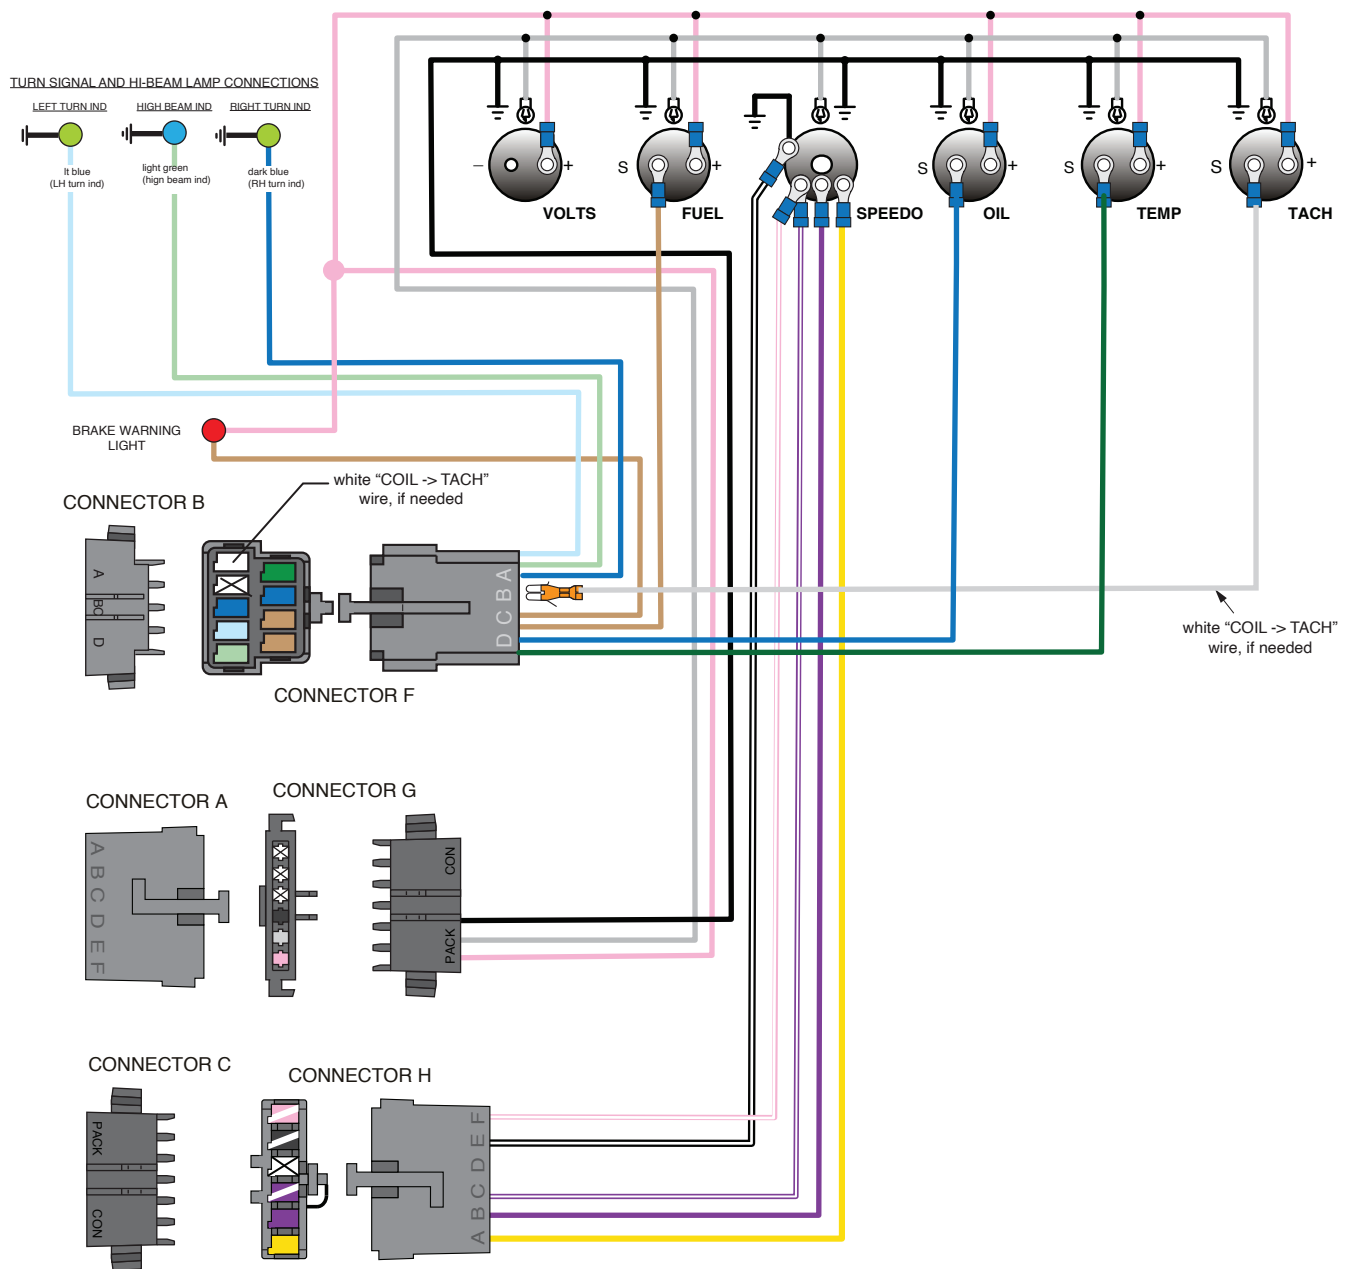

Connectors A,
B and C
(from Dash
Harness,
Bag G)

NOTE:

These are general instructions for hooking up aftermarket gauges with an electric speedometer. Connector (H) and the instructions in Connector H will ONLY be used in the event that you are utilizing an aftermarket electric speedometer. If your car does NOT have an electric speedometer, the Connector H will NOT be used and should not be plugged onto your dash harness. It is best to consult the speedometer manufacturer's instructions if you have any questions.

Yellow VSS Ground Connect to VSS neg. "-" on speedometer.

Purple VSS Signal Connect to VSS input on speedometer.

Purple/White VSS Power Connect to 12V power on speedometer.

Black/White Speedo Ground Connect to ground on speedometer.

Pink/White Speedo Power Connect to 12v power on speedometer.

NOTE: This wire will double onto the same stud as the purple/white VSS power wire from above.



510509


page 6

92972431 instruction rev 1.0 5/14/2025

510509

Classic Update Series

Electric Speedo VSS extension connection:

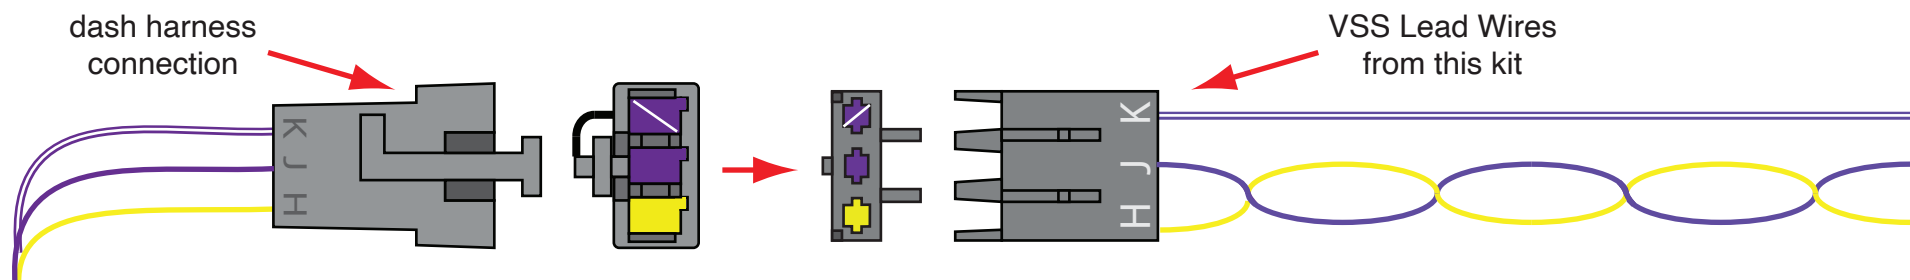

If you are using an aftermarket electric speedometer in your vehicle, you will need to connect the vehicle speed sensor (VSS) Lead Wires from this kit to the dash side connection of your dash harness. The yellow and solid purple wires must remain twisted together as shown above. These three wires will need to pass through the firewall or floor of your vehicle down to the vehicle speed sensor unit in the transmission. Generally, the solid purple wire connects to the “signal” lead, the yellow wire connects to the “ground” lead, and the purple/white stripe wire connects to the “12 volt power” lead on the vehicle speed sensor assembly. However, you should consult the directions that came with your gauges, and connect your vehicle speed sensor per the manufacturer’s instructions.



www.americanautowire.com 856-933-0801

VSS LEAD WIRES
Various Applications
Classic Update Series

510730

92972371 Rev 0.0 4/9/2019



520001 Digital Gauge System Dim Wire Kit:

ALL GM Classic Update Kits (See page 2 for 510298 Mopar Cuda & Challenger Kit)

Use this kit when installing an aftermarket digital gauge system that requires a 12-volt signal to dim the display when the parking lamps or headlights are turned on.

1. Locate the Headlight Switch Connector:

Locate the headlight switch connector in the dash harness section of the Classic Update Kit being installed, and remove the brown “REAR RUNNING LIGHTS” Wire. **DO NOT** cut the terminal off this wire, as it will be required later in the install.

For guidance, refer to American Autowire’s instructional video on how to remove a terminal from a connector:

https://www.youtube.com/watch?v=_3GoK3xE1gs

2. Insert the Dimmer Jumper Wire:


Take the pre-terminated end of the dim wire jumper, which includes two wires in one terminal, and insert it into the now vacant cavity of the headlight switch connector (where the rear running lamps wire was originally removed).

3. Reconnect the Rear Running Lights Wire:

Insert the now loose “REAR RUNNING LIGHTS” wire terminal into the provided 56Fx1 connector (Item “A”). Plug this connector into the short pigtail section of the dim wire jumper as illustrated below.

4. Connect to the Digital Gauge System:

Route the long loose end of the dim wire jumper to the digital gauge control module. Cut the wire to the appropriate length and connect it to the dimmer input on the controller, following the manufacturer's instructions, to complete the installation.

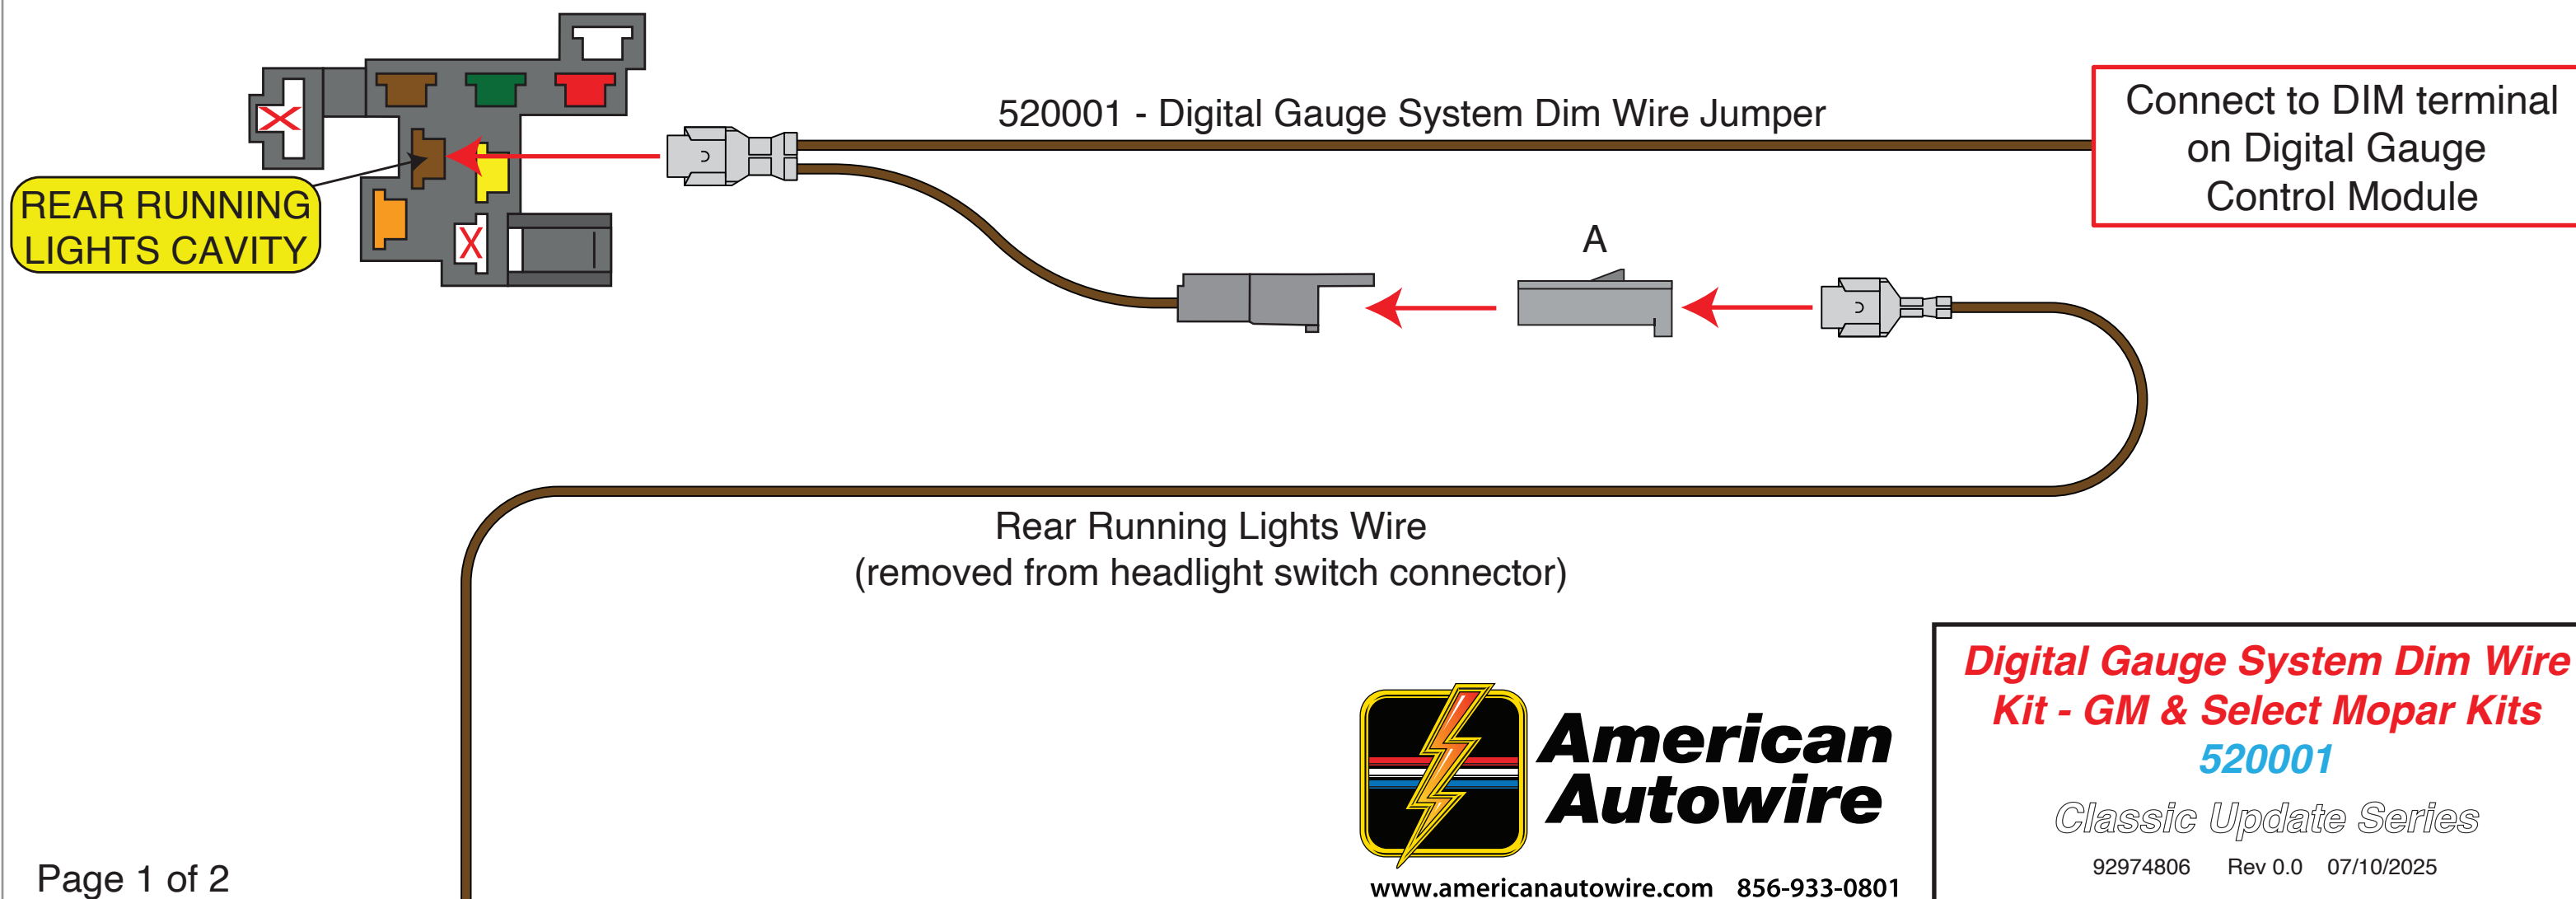

520001 Digital Gauge System Dim Wire Kit:

510298 Mopar Cuda & Challenger Classic Update Kit (ONLY)

Use this kit when installing an aftermarket digital gauge system that requires a 12-volt signal to dim the display when the parking lamps or headlights are turned on.

1. Locate the Headlight Switch Connector:

Locate the Park/Tail Lights connector in the headlight connection section of the 510291 Dash Harness, and remove the brown "PARK LIGHTS" / "REAR RUNNING LIGHTS" Wires from the single cavity connector. **DO NOT** cut the terminal off these wires, as it will be required later in the install.

For guidance, refer to American Autowire's instructional video on how to remove a terminal from a connector:

https://www.youtube.com/watch?v=_3GoK3xE1gs

2. Insert the Dimmer Jumper Wire:


Take the pre-terminated end of the dim wire jumper, which includes two wires in one terminal, and insert it into the single cavity connector that was removed from the dash harness.

3. Reconnect the Rear Running Lights Wire:

Insert the now loose "PARK LIGHTS" / "REAR RUNNING LIGHTS" wires previously removed from the single cavity connector on the dash harness into the provided 56Fx1 connector (**Item "A"**). Plug this connector into the short pigtail section of the dim wire jumper as illustrated below.

4. Connect to the Digital Gauge System:

Route the long loose end of the dim wire jumper to the digital gauge control module. Cut the wire to the appropriate length and connect it to the dimmer input on the controller, following the manufacturer's instructions, to complete the installation.

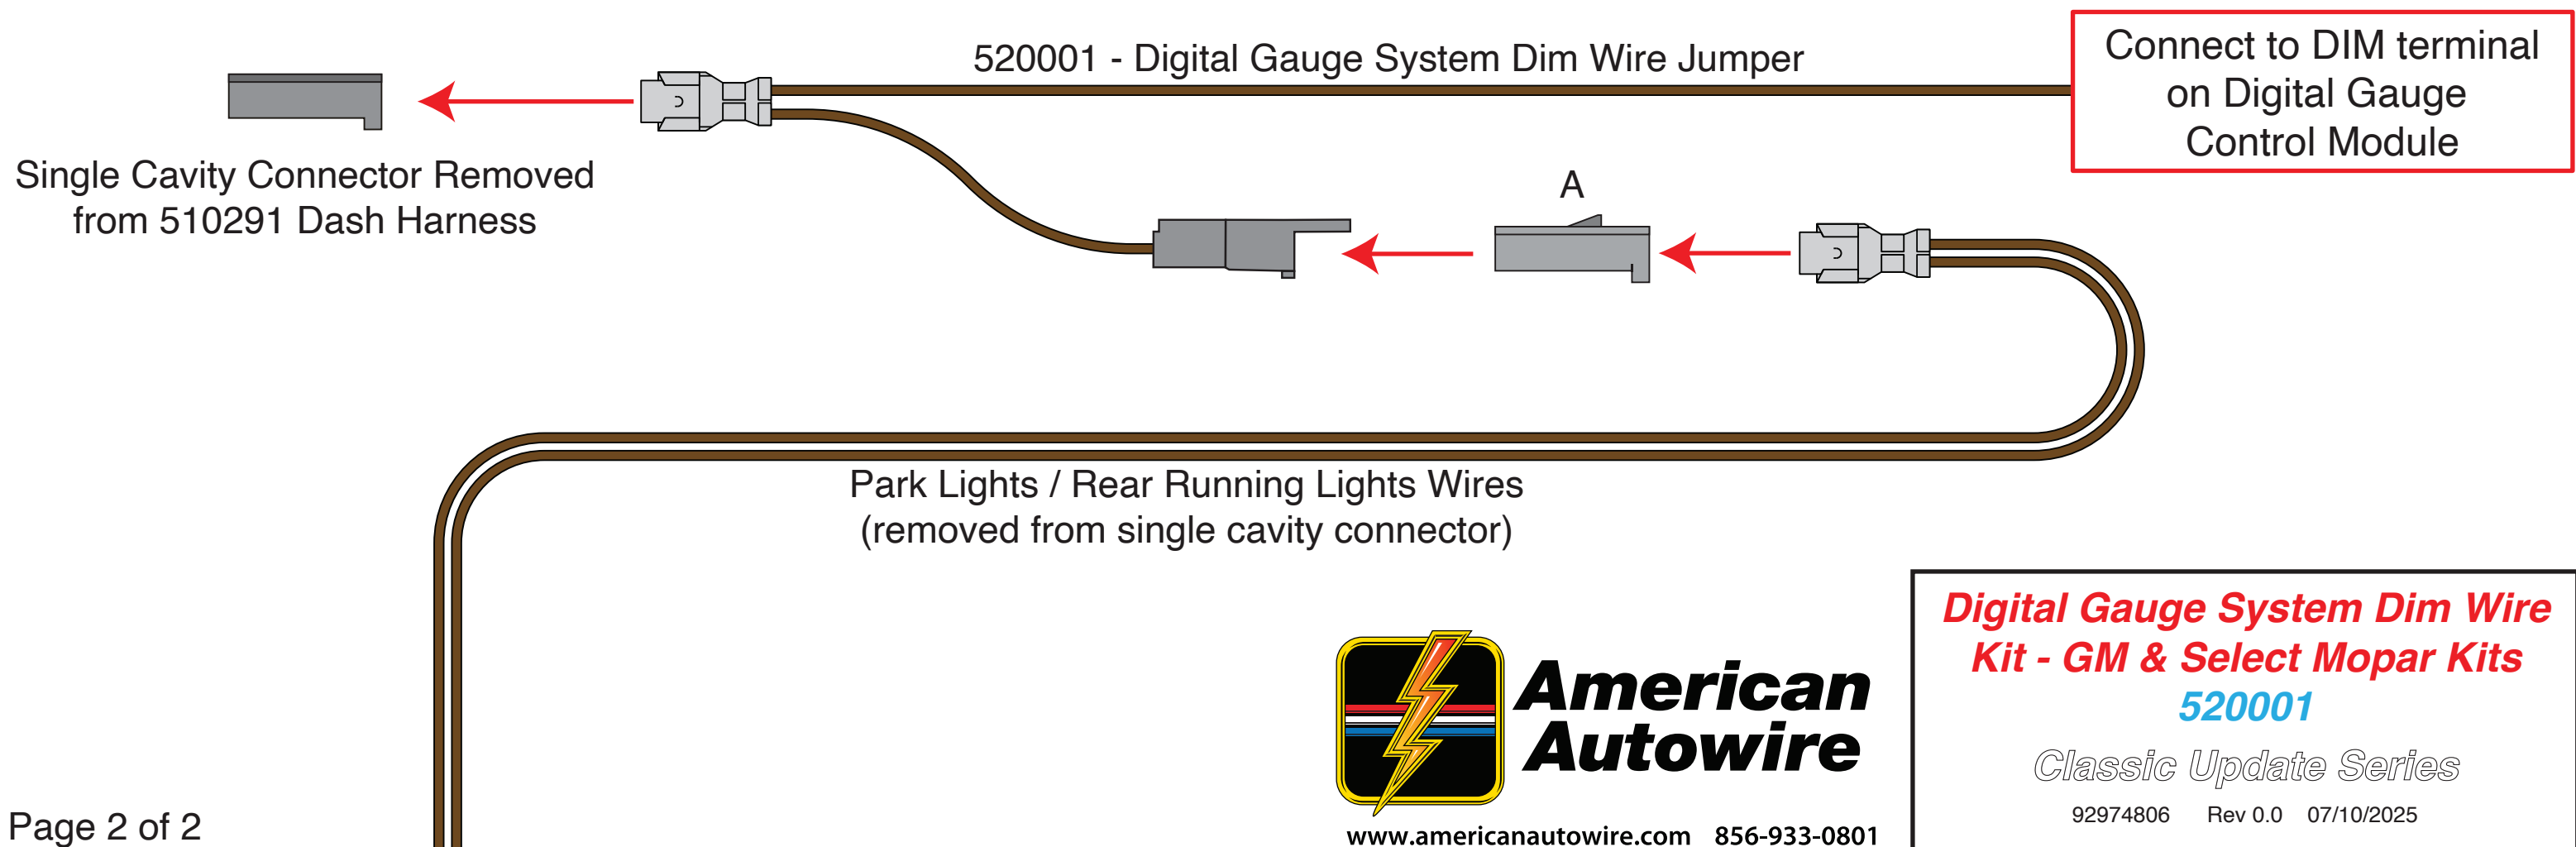

REFER TO SHEETS 3 AND 4 FOR CONNECTING TO STOCK FACTORY CONSOLE GAUGES.
IF YOU ARE USING AFTERMARKET GAUGES, USE THE AFTERMARKET GAUGE CONNECTION TERMINALS (SEE 500663 BAG H).



1967 FACTORY CONSOLE GAUGE PACKAGE

For safety purposes, American Autowire does not support or encourage the use of a factory ammeter in an after-market application. A voltmeter is a much safer choice to monitor the charging system in a car equipped with a higher amperage alternator. American Auto manufactures factory type replacement voltmeters that are direct replacements for the stock ammeters for both the 1968-69 Camaro (510121) and the 1969-72 Nova (510122) console gauge packages. Contact our Sales Group or your favorite retailer today to purchase one of these gauges to complete your project.




1968-69 Camaro 1969-72 Nova FACTORY CONSOLE GAUGE PACKAGE



**American
Autowire**

www.americanautowire.com 856-933-0801

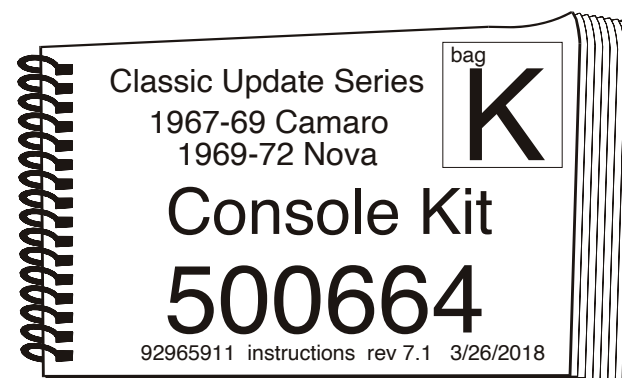

REFER TO SHEETS 3 AND 4 FOR CONNECTING TO STOCK FACTORY CONSOLE GAUGES.
IF YOU ARE USING AFTERMARKET GAUGES, USE THE AFTERMARKET GAUGE CONNECTION TERMINALS (SEE 500663 BAG H).

CONNECTOR A

ORANGE 12v Ignition

Connect this wire to the courtesy lamp in the rear of the console (either location).

Connect the shorter bare end wire to the console clock (if factory equipped).

Note: If a console clock is not being used, this wire must be terminated and taped back against the harness to prevent and short to ground.

WHITE Courtesy Ground

Connect this wire to the courtesy lamp in the rear of the console (either location).

If you are using a console shift manual transmission, without gauges on the console, then only the orange and white wires will be used. All other applications, continue to the next wire.

CONNECTOR P

BLACK Ground

Route this wire to the console gauge plates and cut to length. Double this wire with the cut off portion, install terminal D.

Connect the ring terminal to the gauge plate, as shown on sheet 3 for 1967 console gauges and sheet 4 for 1968-69 console gauges.

For 1967 console gauges, connect the remaining black wire to the floor under the console using terminal as shown on sheet 3.

For the 1968-69 console gauges, there are two gauge mounting plates that are mounted in a plastic tray. Both of these plates need to be grounded.

In the stock configuration the second plate ground was on the inside of the tray connecting the two plates with a small ground jumper wire.

If this wire is not on your gauge plates, you will need to create an additional ground wire to the second plate as shown on sheet 4. Then

the remaining black wire is attached to the floor under the console using terminal D as shown on sheet 4.

Using the butt splice connectors C, route the wires to each lamp location as shown on sheet 2. Install lamps socket G and

rivets J and plug into the lamp holes on the gauge plates.

Note: If you have an automatic transmission, you will need to install the shift indicator lamps, as shown on sheet 2, using terminals F, J, springs H, and lamp sockets E.

LOOSE WIRES

PINK 12V Ignition

Plug this wire into connector B, maintaining color continuity with the mating connector on the dash harness.

Route the other end to the temperature gauge, and cut to length. Double this wire with the cut off portion, and

install terminal B. Route the remaining end to the fuel gauge, install terminal B, and plug into the fuel gauge

in the location shown on sheet 2. (if using an electric oil pressure gauge, then double this wire and route to the oil gauge also)

Plug this wire into connector B. Route this wire to the fuel gauge and cut to length. Install terminal B and connect to fuel gauge,

as shown on sheet 2.

TAN Fuel Sender


This wire is only used on an electric oil pressure gauge (not used on a factory mechanical pressure gauge).

DK BLUE Oil Pressure Sender


Plug this wire into connector B. Route this wire to the temperature gauge and cut to length. Install terminal B and connect to the

DK GREEN Temperature Sender



sender (-) terminal.



A.B & C are part of gauge terminal kit 92965220 found in bag H

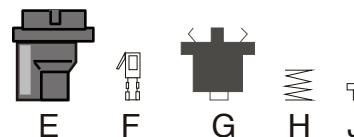


Look!

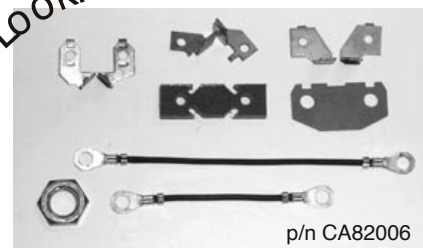

American Autowire manufactures OEM gauge terminals and
OEM gauge plates for the 1968 & 1969 Camaros!

Classic Update Series

CONNECTING TO 1968-69 Camaro or 69-72 Nova FACTORY CONSOLE GAUGES

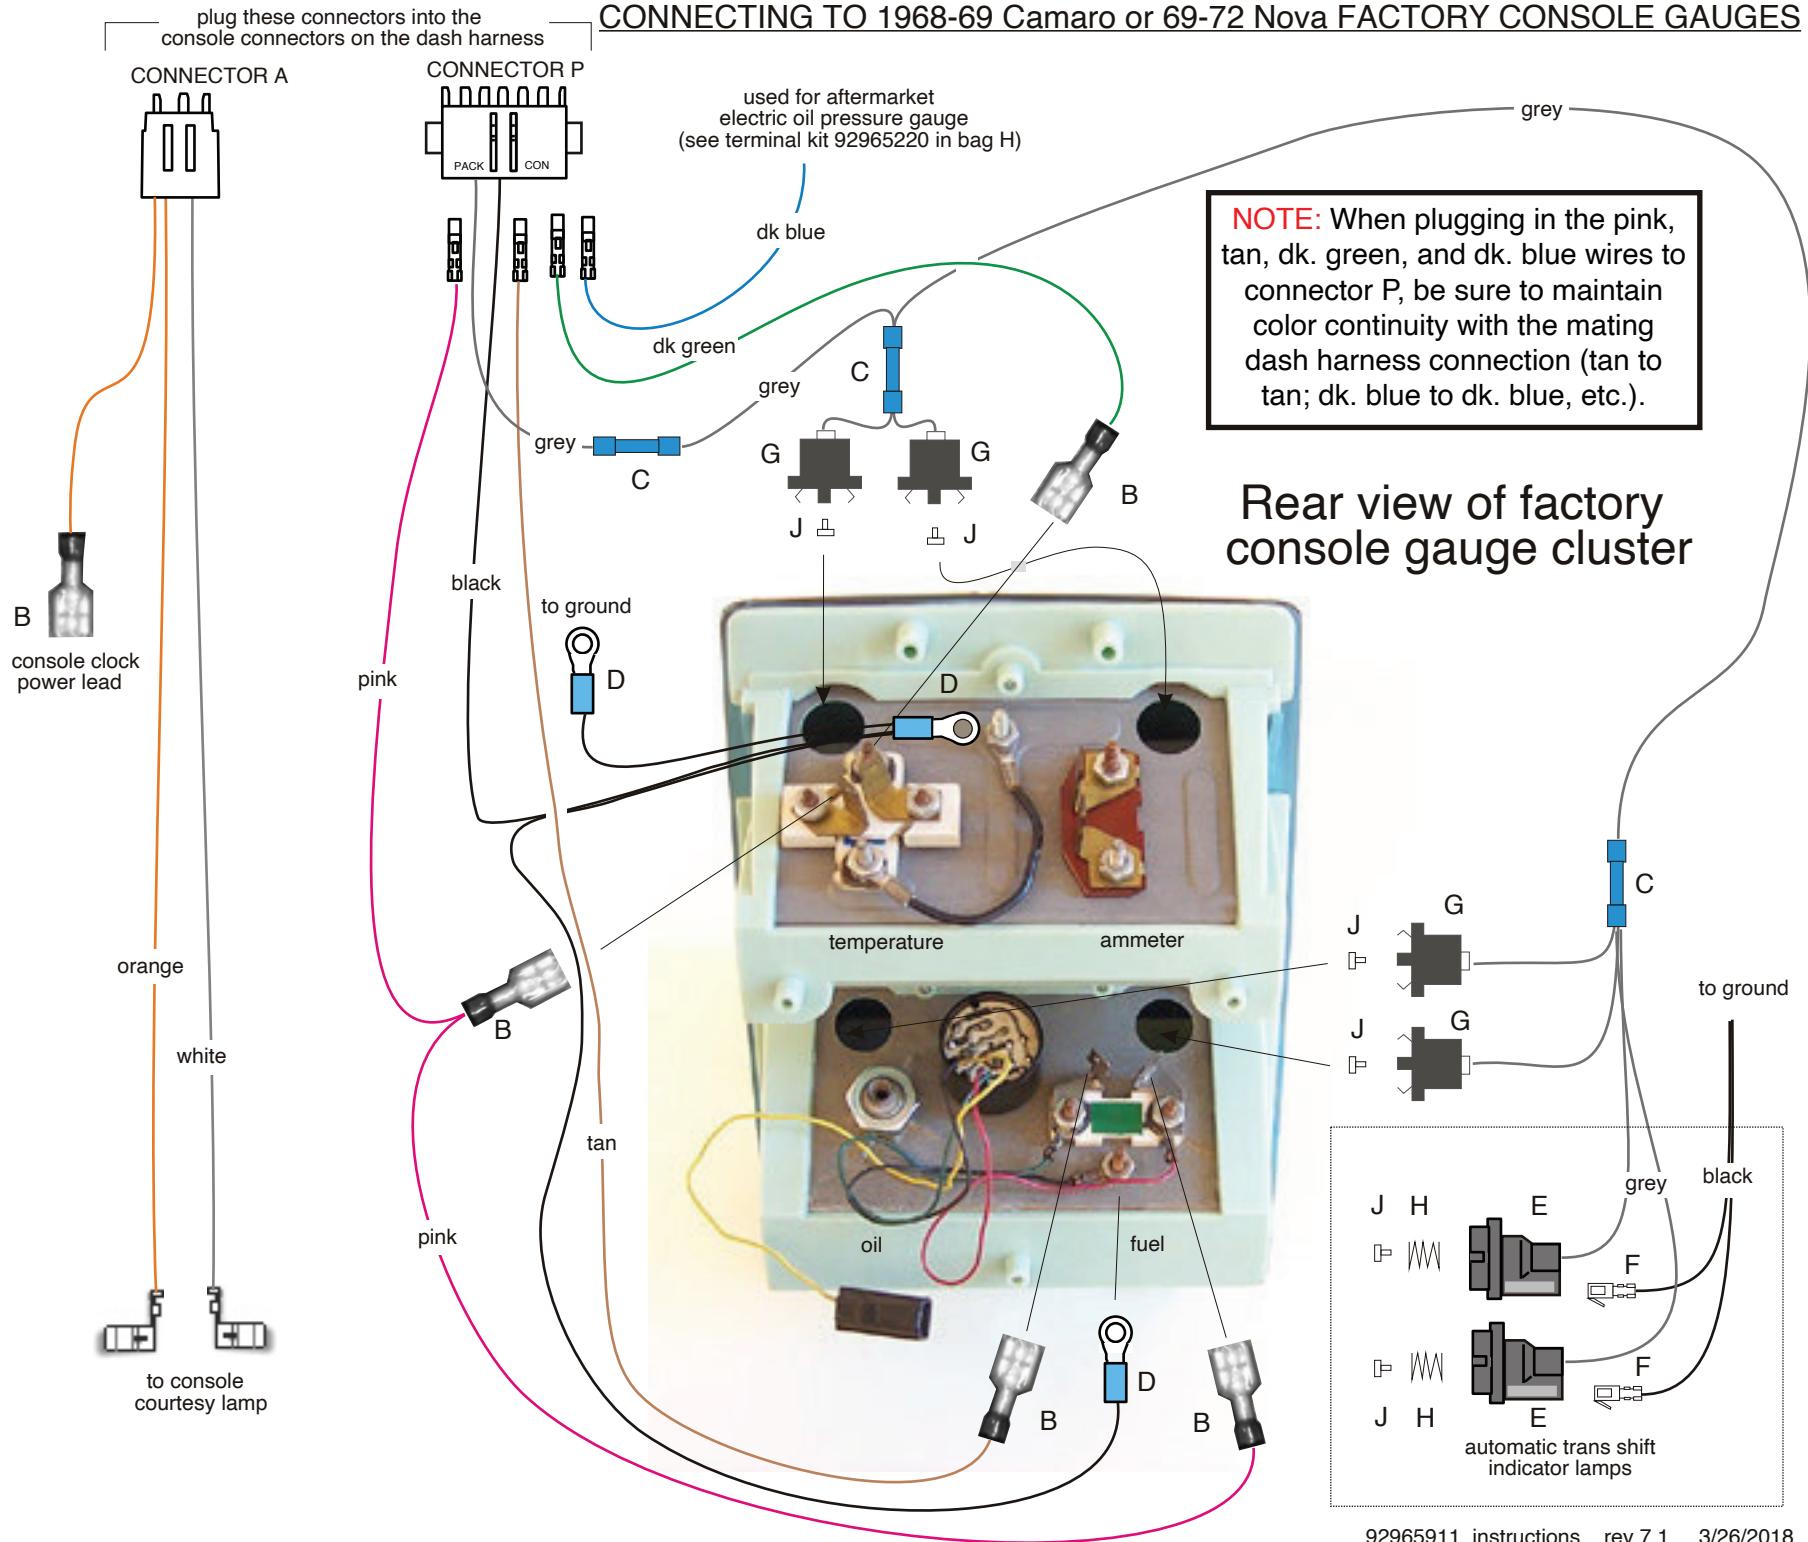

Before you begin:

Read the entire instruction sheet before starting. Ensure all components are present. If anything is missing, stop and contact American Autowire at 856-933-0801. Always disconnect the negative battery cable before beginning installation.

Fuse Block Mounting and Assembly:

- Choose a mounting location close to the battery power source, under the hood, and secure the fuse block using mounting screws (not included) of your choice.
 - Ensure both the 12 ft. 6Ga. charging wire and the 10Ga. main power feed can reach this location. The 6Ga. charging wire will need to connect to the alternator, the megafuse block, and the starter/battery junction.
- Detach the fuse block cover and remove the factory-installed nuts and lock washers from the studs.
- Place the busbar jumper (Item “D”) across the designated studs.
 - Important: The jumper must be installed on the side that connects to your main power source (starter solenoid or battery junction).
- Install one 175A megafuse (Item “C”) onto each fuse position in the block.
- Reinstall the nuts and lock washers loose over the jumper and fuses.

Battery Feed Wiring:

Route the 6Ga. Charge Wire (Item “A”) from the mounted Megafuse Block (Item “B”) to the battery stud on the starter solenoid, or a similar battery junction, under the hood and cut to length. Cut the 3/8” Shrink Tubing into 1 inch lengths. Slide one of these smaller lengths over each end of the charge wire.

- At the starter end:** Crimp and solder a 6Ga. Starter Ring Terminal (Item “G”) and then insulate the crimp with the previously installed shrink tube. Secure the newly crimped end to the battery stud on the starter solenoid or battery junction.
- At the megafuse block end:** Crimp and solder a 6Ga. Megafuse Ring Terminal (Item “H”) and then insulate the crimp with the previously installed shrink tube. Attach the crimped end to the megafuse block on the **busbar** side of the fuses. Tighten securely.

Alternator Feed Wiring:

Route the remaining length of the 6Ga. Charge Wire (Item “A”) from the mounted Megafuse Block (Item “B”) to the battery stud on the alternator and cut to length. Slide one of the cut, 1 inch lengths of shrink tube (Item “F”) over the end of the charge wire closest to the megafuse block.

- At the alternator end:** Slide the Alternator Boot (Item “E”) on the end of the wire. Crimp and solder a 6Ga. Alternator Ring Terminal (Item “J”) and secure the newly crimped end to the battery stud on the alternator.
- At the megafuse block end:** Crimp and solder a 6Ga. Megafuse Ring Terminal (Item “H”) and then insulate the crimp with the previously installed shrink tube. Attach the crimped end to a fuse stud on the **side opposite the busbar**. Tighten securely.

Panel Feed Wiring:


Locate the 10Ga. “12V Battery Feed” wire from the engine or panel subkit, route it to the Megafuse block, cut to length, and slide a piece of the cut shrink tubing (Item “F”) over the cut end. Crimp and solder a 10 GA. megafuse ring terminal (Item “K”) on the end and insulate the crimp with the shrink tubing. Attach to the remaining open fuse stud on the side **opposite the busbar**. Tighten securely.

Parts Legend:


A




B

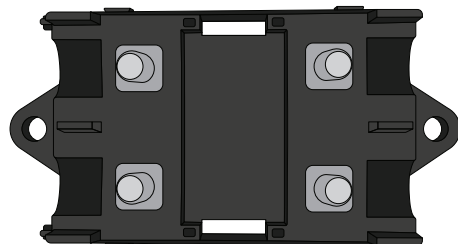

C



D




E




F



G



H



J



K



bag

Z

6 Gauge Charge Wire - QTY (1)
(144.0" Length)

Megafuse Block - QTY (1)
(Lid not shown)

175A Megafuse - QTY (2)

Megafuse Block Busbar - QTY (1)

Alternator Boot - QTY (1)

3/8" Shrink Tubing - QTY (1)
(8.0" Length)

6Ga. Starter Ring Terminal - QTY (2)
Fits 3/8" Stud

6Ga. Megafuse Ring Terminal - QTY (3)
Fits 5/16" Stud

6Ga. Alternator Ring Terminal - QTY (2)
Fits 1/4" Stud

10Ga. Megafuse Ring Terminal - QTY (2)
Fits 5/16" Stud



American

Autowire

www.americanautowire.com

856-933-0801

Alternator and Main Power
Connection Kit


510476

Classic Update Series

92974822 Rev 0.0 05/05/2026


Page 1

Typical GM or MOPAR Connections

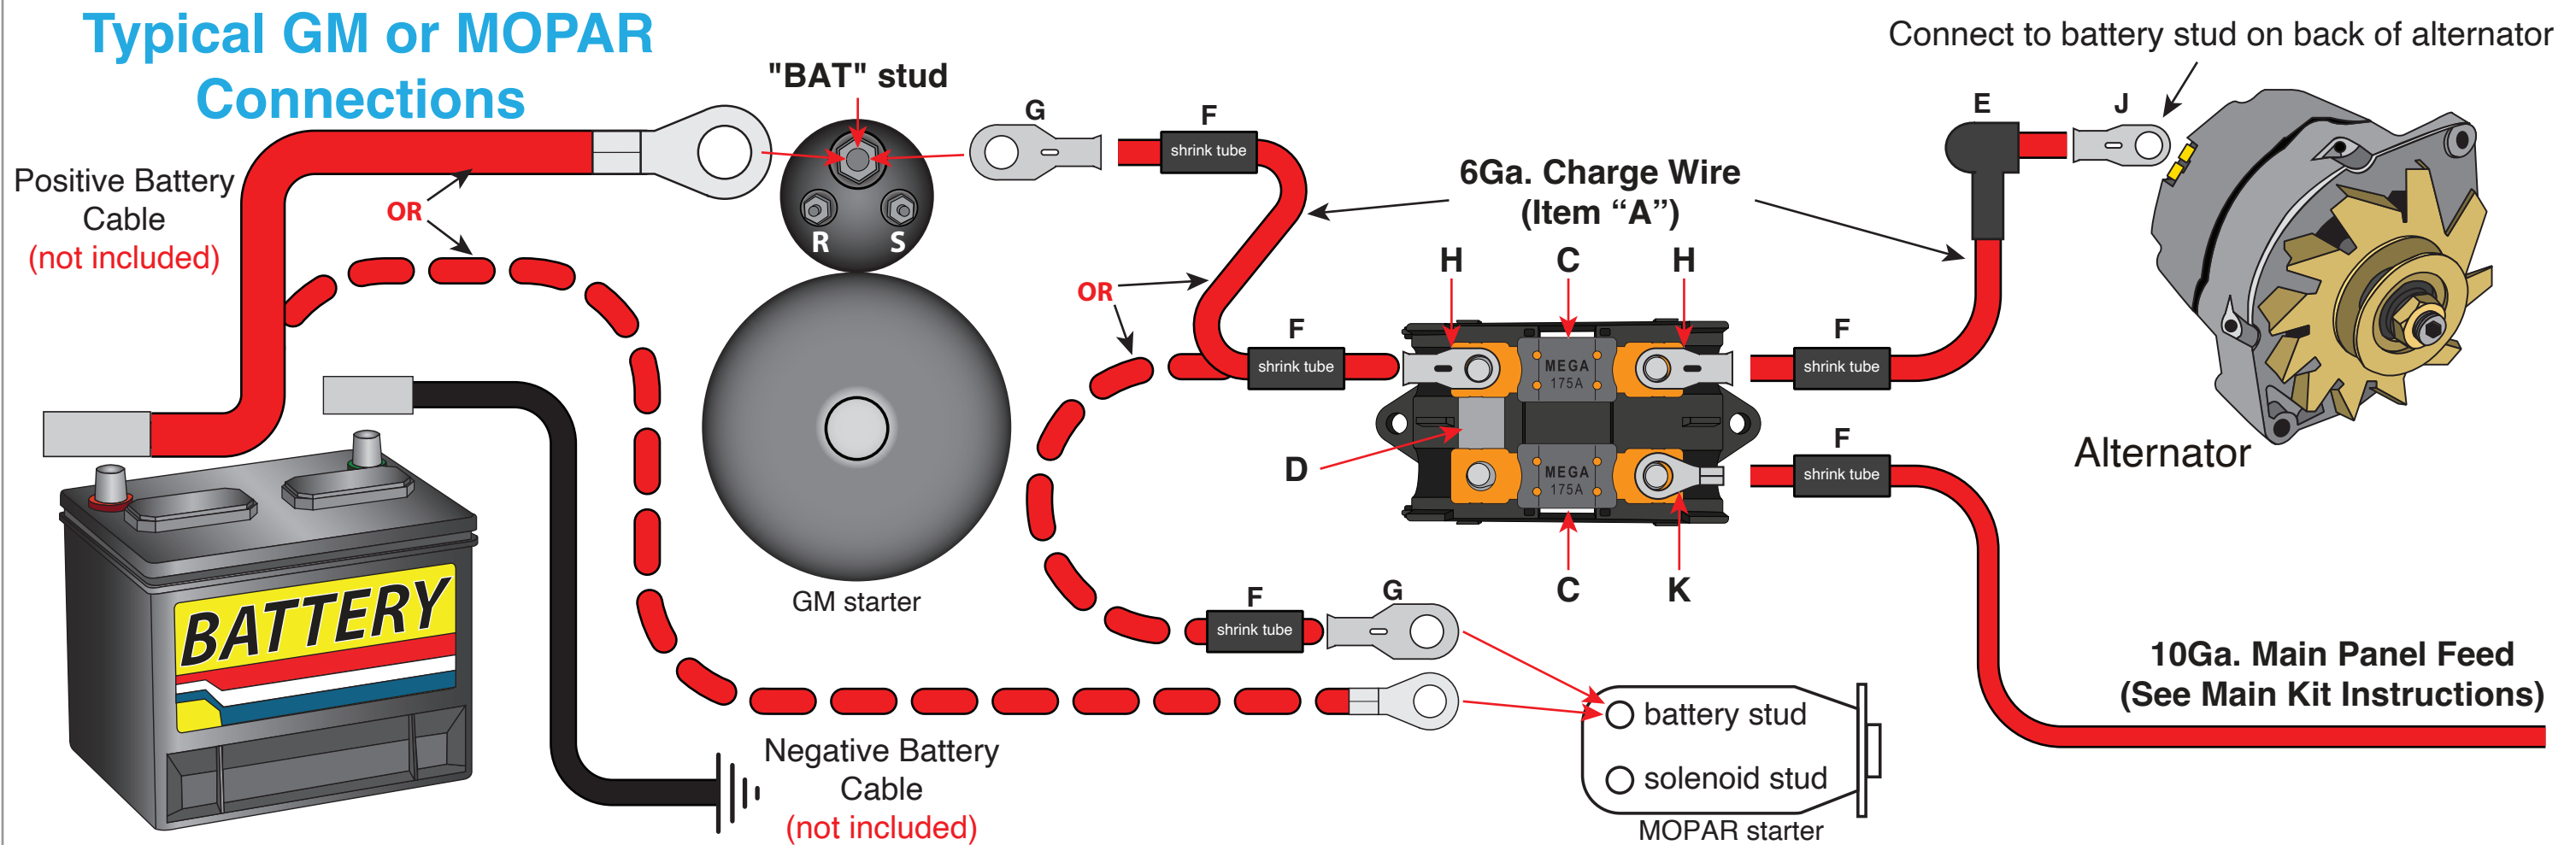

bag
Z

Typical Ford Connections

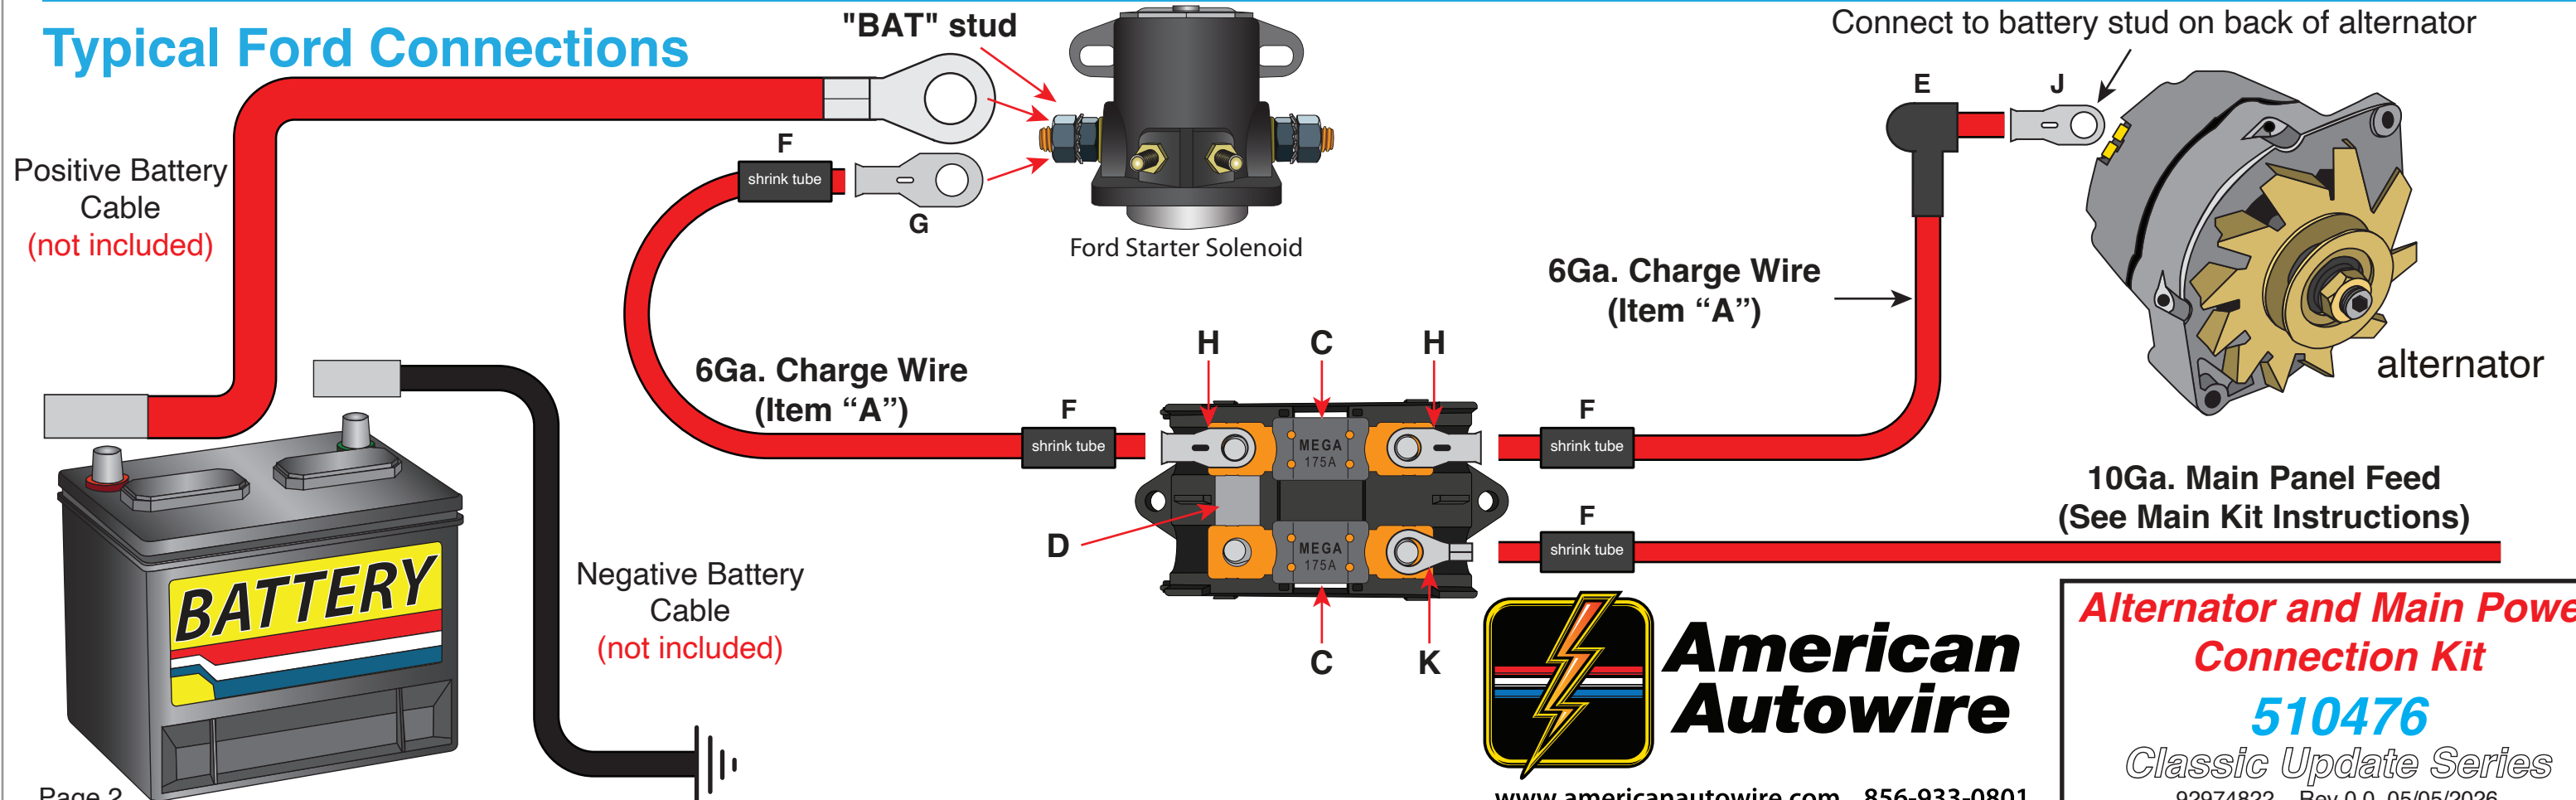

**American
Autowire**

www.americanautowire.com 856-933-0801



**Alternator and Main Power
Connection Kit**

510476

Classic Update Series

92974822 Rev 0.0 05/05/2026

Classic Update Series

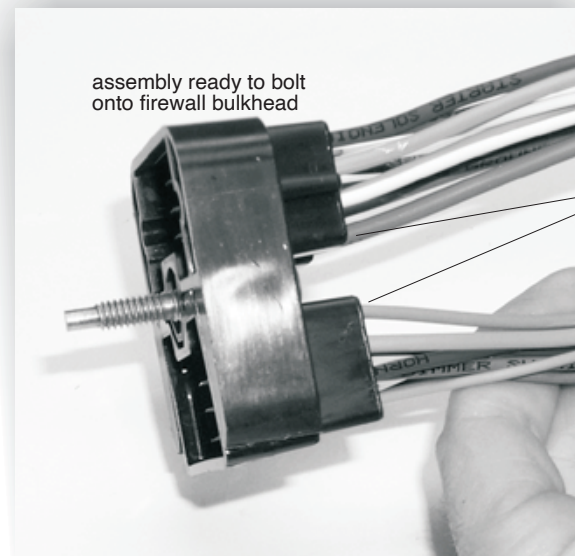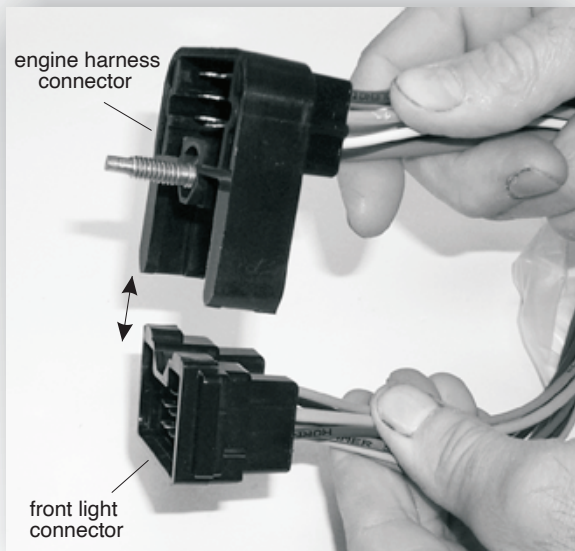

apply silicone sealant to back side of connector after installing terminals

The bulkhead connector from this Engine kit must snap into the mating engine connector (bag L), as shown. After snapping together, then bolt the assembly into the dash harness firewall connector using the attached bolt.

Look!




American Autowire also sells factory OEM style harness wrap. This is the same stuff used on original engine harnesses! If you want that OEM look with your Classic Update wiring system, then give us a call and order p/n R0067108!




**American
Autowire**

www.americanautowire.com 856-933-0801

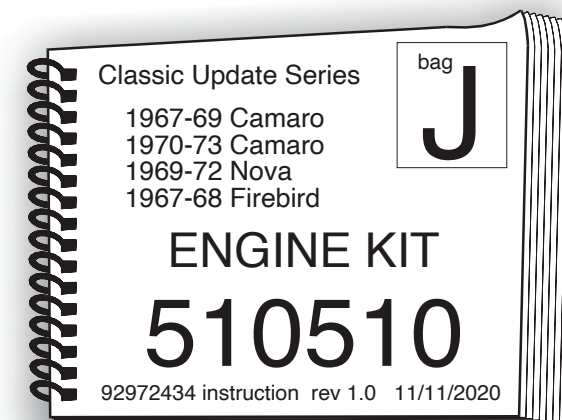

Terminals used in this installation.

This kit contains loose piece terminals and connectors necessary to complete a connection to a specific component. Each connection on the instruction sheet identifies specific parts by a letter code that corresponds to the letter code on a part picture identified below. The parts below are shown in actual size to help in identification. This kit will only contain those parts required for the connections in the specific sub-kit you are working on. Just match the part to the picture below to identify the part letter code you will see on the instruction sheet for the sub-kit harness you are working on. We have supplied additional terminals in the event that extra terminals are necessary.

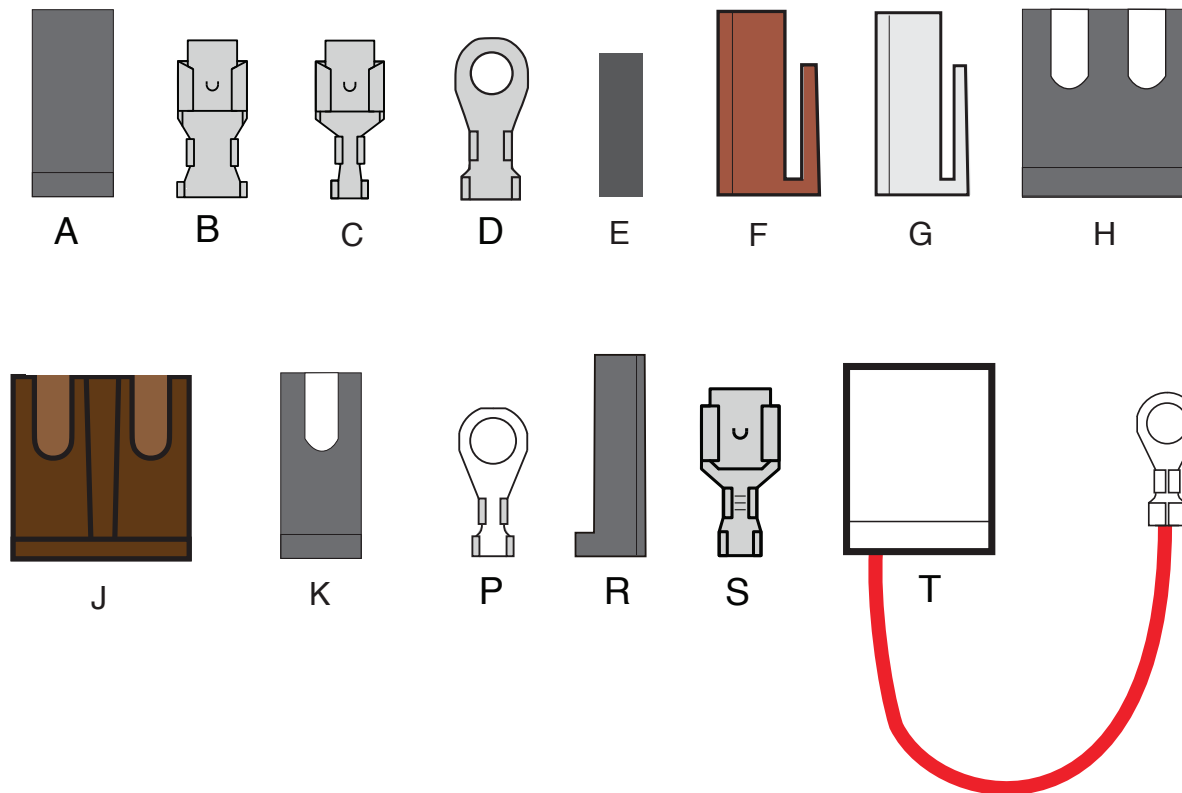

**American
Autowire**

www.americanautowire.com 856-933-0801

ENGINE KIT

510510

92972434 instruction rev 1.0 11/11/2020

TEMPORARILY, PLUG THE MAIN BULKHEAD CONNECTOR FROM THIS KIT INTO THE MATING CONNECTOR ON THE DASH BULKHEAD CONNECTOR (LOCATED UNDER THE MASTER CYLINDER) Note: This will be unbolted to install the front light harness later.

BULKHEAD CONNECTOR WIRES:

RED 12V BATTERY
PURPLE STARTER SOLENOID
DK BLUE OIL PRESSURE SENDER
ORANGE HEAT / AIR

Route this wire to the Megafuse and cut to length. Use ring terminal, shrink tubing from 510476 kit. Connect as shown on sheet 3.
Route to the starter solenoid and cut to length. Install rubber sleeve E and ring D. Connect to the 'S' terminal on solenoid.
Connect this wire to the oil pressure sending unit. Using terminal P, terminal C with connector A, or terminal S with connector R.
If using after-market air conditioning, this wire will not be used. If using a stock heater only system, route this wire to the heater blower, cut to length. Install terminal C and connector A and plug into the blower unit. Plug the other end into the engine bulkhead connector as shown on sheet 3.

DK GREEN WATER TEMP SENDER

Connect this wire to the temperature sending unit using terminal P or terminal C with connector K (depending on your sending unit).

PINK 12V IGNITION

If using an HEI distributor, or after-market ignition system which requires a 12V feed:
Route the PINK wire to the coil and trim to length. Install terminal C and connector G, and plug into distributor cap BAT location.

PINK 12V IGNITION
YELLOW STARTER SOLENOID-R

If using a points type ignition system which required reduced voltage:
Route the PINK wire to the ignition feed side of the ballast resistor (not included in this kit). Connect the loose piece YELLOW (STARTER SOLENOID-R) wire to the R terminal on the starter and connect the other end to the coil side of the ballast resistor (not included in this kit). Connect a piece of the left over PINK wire to the coil side of the ballast resistor and route the to the distributor coil + side. Connect the distributor input lead wire to the coil negative (-) side.

WHITE COIL-TACH

Route this wire to the coil and trim to length. If using an HEI distributor, terminal B and connector F are included for connection. Plug into the TACH location on the HEI distributor, or attach to the negative side of coil in a points type system.

TAN ELECTRIC CHOKE

If you are using a carburetor with an electric choke, connect this wire to the electric choke connection. If you are not using an electric choke or a turbo 400 transmission, remove this wire from the engine bulkhead connector

The following wires are for use on a stock wiper system. If using an after-market wiper system, follow the manufacturer's instructions (see sheets 3 and 5 for details).

BLACK WIPER LOW SPEED

Route to the wiper motor and trim to length. Install terminal C, plug into connector K, and plug into the low speed terminal of the wiper motor as shown on sheet 5.

DK BLUE WIPER WASHER

Route this wire to the washer pump and trim to length. Install terminal C and plug into BROWN connector J in the location shown on sheet 3.

LT BLUE WIPER HI SPEED

Route this wire to the wiper motor and trim to length. Install terminal C and plug into BLACK connector H in the location shown on sheet 3.

WHITE WIPER ACC

Route this wire to the wiper motor and trim to length. Double it with the cut off portion, install terminal B and plug into the open cavity of connector H as shown on sheet 3. Route the loose end of this wire to the washer pump, install terminal C and plug into open cavity of connector J as shown on sheet 3. Plug connector H onto the high speed terminals of the wiper motor as shown on sheet 5. Plug connector J onto the washer pump terminals of the wiper motor as shown on sheet 5.

ALTERNATOR WIRES:

HEAVY RED

Use the 6ga red wire, boot and ring terminal from the 510476, route from alternator to the Megafuse and cut to length. Connect as shown on sheet 3.

SMALL RED

Send the ring terminal end of pigtail T through the boot (as shown on sheet 3) and connect to the battery stud on alternator. Do not plug the connector into the alternator yet as the exciter wire (Brown) needs to be added before the connector is plugged in.

BROWN ALTERNATOR IGN


Route this wire to the alternator and cut to length. Install terminal C and plug into the regulator connector as shown on sheet 3.

Once the main connector has all of it's wires plugged in, the connector cavities should be sealed with di-electric grease on the terminals. Also, to assure a moisture resistant seal, silicone can be applied to seal the outside of the connector.

ENGINE KIT

510510

92972434 instruction rev 1.0 11/11/2020

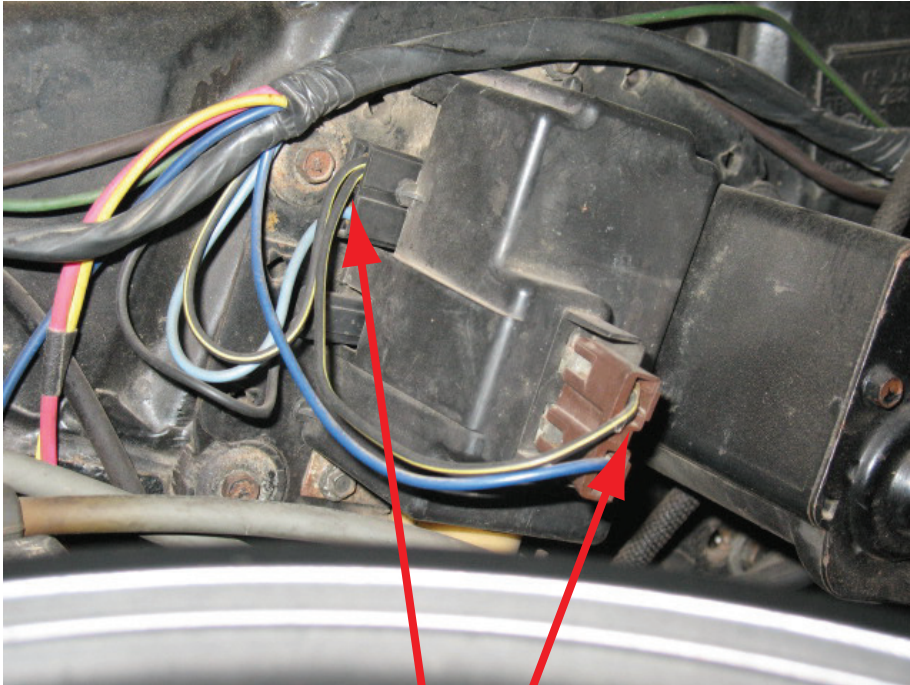

The photo above depicts the typical stock 1967-1969 Camaro (all), 1968-1972 Nova (all), 1967-1968 Firebird (all), and 1970-73 Camaro “without depressed park” wiper motor and washer pump connections. Where you see the black wire with the yellow strip in the photo, that would be equivalent to the AAW white “wiper feed” power wire.





The photo above depicts the typical stock 1970-73 Camaro “with depressed park” wiper motor and washer pump connections. Where you see the black wire with the yellow strip in the photo, that would be equivalent to the AAW white “wiper feed” power wire.



This page intentionally left blank

Classic Update Series

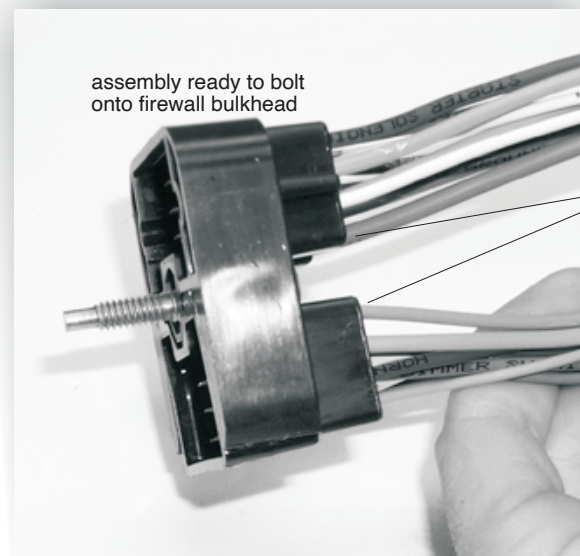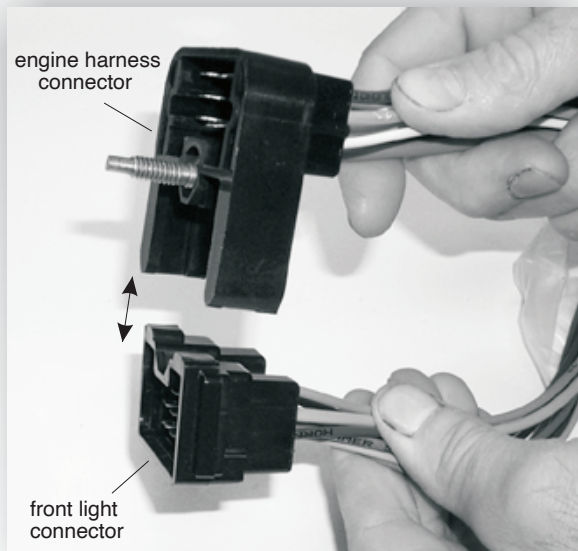

apply silicone sealant to back side of connector after installing terminals

The bulkhead connector from this front light kit must snap into the mating engine connector (bag J), as shown. After snapping together, then bolt the assembly into the dash harness firewall connector using the attached bolt.

Look!



American Autowire also sells factory OEM style harness wrap. this is the same stuff used on original Camaro harnesses! If you want that OEM look with your Classic Update wiring system, then give us a call and order p/n R0067108 !










**American
Autowire**

www.americanautowire.com 856-933-0801




Terminals used in this installation.






This kit contains loose piece terminals and connectors necessary to complete a connection to a specific component. Each connection on the instruction page identifies specific parts by a letter code that corresponds to the letter code on a part picture identified below. The parts below are shown in actual size to help in identification. This kit will only contain those parts required for the connections in the specific sub-kit you are working on. Just match the part to the picture below to identify the part letter code you will see on the instruction page for the sub-kit harness you are working on. We have supplied a few additional terminals in the event that extra ones are necessary.




U

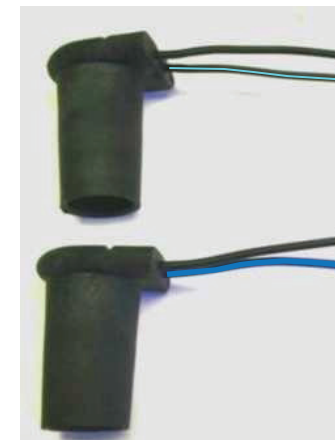

REF: These extensions
can be found in 500887



V

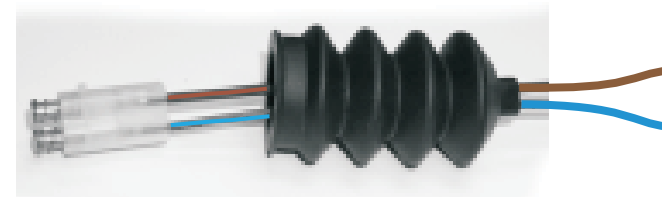

REF: These extensions
can be found in 500737



**American
Autowire**


www.americanautowire.com 856-933-0801

FRONT LIGHT KIT

510511

92972437 instruction rev 2.0 5/18/2025

Classic Update Series

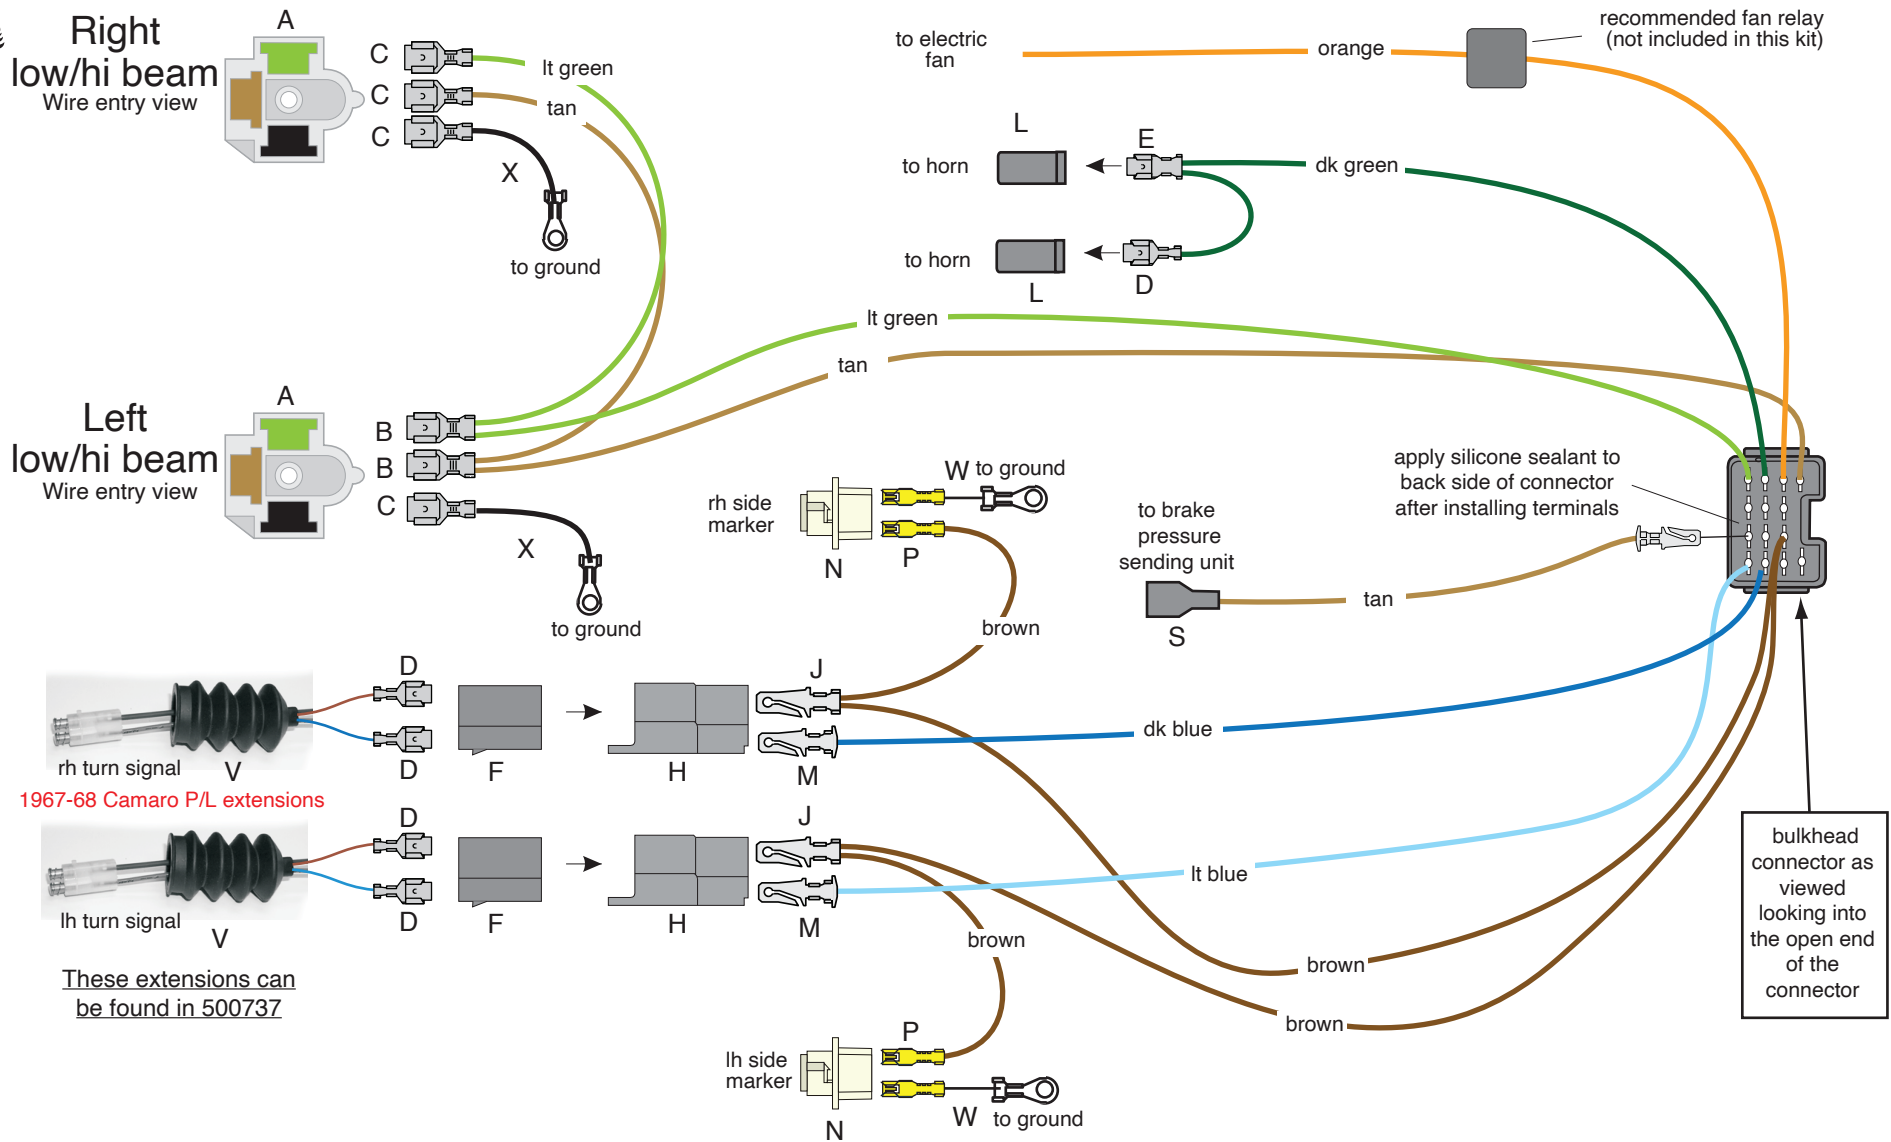

1967-68 Camaro
Standard Front Light



**American
Autowire**

www.americanautowire.com 856-933-0801

FRONT LIGHT KIT

510511

92972437 instruction rev 2.0 5/18/2025

1967-68 Camaro Standard Front Lighting


Connect the bulkhead connector from this kit onto the bulkhead connector from the engine kit (bag J), and bolt to the firewall dash bulkhead.

LIGHT BLUE	LEFT FRONT TURN	Route this wire to the LH turn signal lamp install terminal M, and plug into connector H as shown on page 3.
DARK BLUE	RIGHT FRONT TURN	Route this wire to the RH turn signal lamp install terminal M, and plug into connector H as shown on page 3.
BROWN	PARK LIGHTS	Route one of the brown wires from the bulkhead connector to the LH (driver side) turn signal lamp and cut to length. Double this wire with the cut off portion, install terminal J, and plug into connector H with the light blue wire from above as shown on page 3. Route the other end of this brown wire connection to the LH side marker lamp, cut to length, install terminal P, and plug this connection into the LH side marker lamp socket N as shown on page 3. (Also plug the pre-assembled black ground wire W, into lamp socket N, as shown on page 3.) Route the other brown wire from the bulkhead connector to the RH turn signal lamp and cut to length. Double this wire with the cut off portion, install terminal J, and plug into connector H with the dark blue wire from above as shown on page 3. Route the other end of this brown wire connection to the RH side marker lamp, cut to length, install terminal P, and plug this connection into the RH side marker lamp socket N as shown on page 3. (Also plug the pre-assembled black ground W, wire into lamp socket N, as shown on page 3.)

NOTE: We have provided parking lamp assemblies V (500737) for you to install into your **standard Camaro** parking lamp housings. Install terminals D and connectors F onto each pigtail assembly, as shown on page 3, (maintaining color continuity with connector H from above), then plug into connector H to complete your parking lamp circuits.

TAN	HEADLIGHT LOW BEAM	Route this wire to the LH (driver side) headlight and trim to length. Double this wire with the cut off portion, and install terminal B. Plug this terminal into connector A, in the location shown on page 3. Route the remaining portion of this tan wire to the RH (passenger side) headlight and trim to length. Install terminal C and connector A, in the location shown on page 3.
LIGHT GREEN	HEADLIGHT HIGH BEAM	Route this wire to the LH (driver side) headlight and trim to length. Double this wire with the cut off portion, and install terminal B. Plug this terminal into connector A, in the location shown on page 3. Route the remaining portion of this light green wire to the RH (passenger side) headlight and trim to length. Install terminal C and connector A, in location shown on page 3.
BLACK	GROUND	Using the pre assembled ground wires X, to to lengths, install terminal C and plug into connector A, in the location shown on page 3. Connect the ring terminal to a good chassis ground. Complete for each headlight.
DARK GREEN	HORN	Route to horns and install terminals D & E, as shown on page 3, Plug into connectors L.
ORANGE	ELECTRIC FAN	Route to the electric fan, and connect per manufacturer's instructions. NOTE: This wire must only be used as the trigger wire for the electric fan relay. American Autowire manufactures relay kits for this application.
TAN	BRAKE LIGHT SWITCH	Plug wire pigtail S into the front light connector in the location shown on page 3. Plug the other end onto the stock brake sender switch as shown on page 3.

Classic Update Series

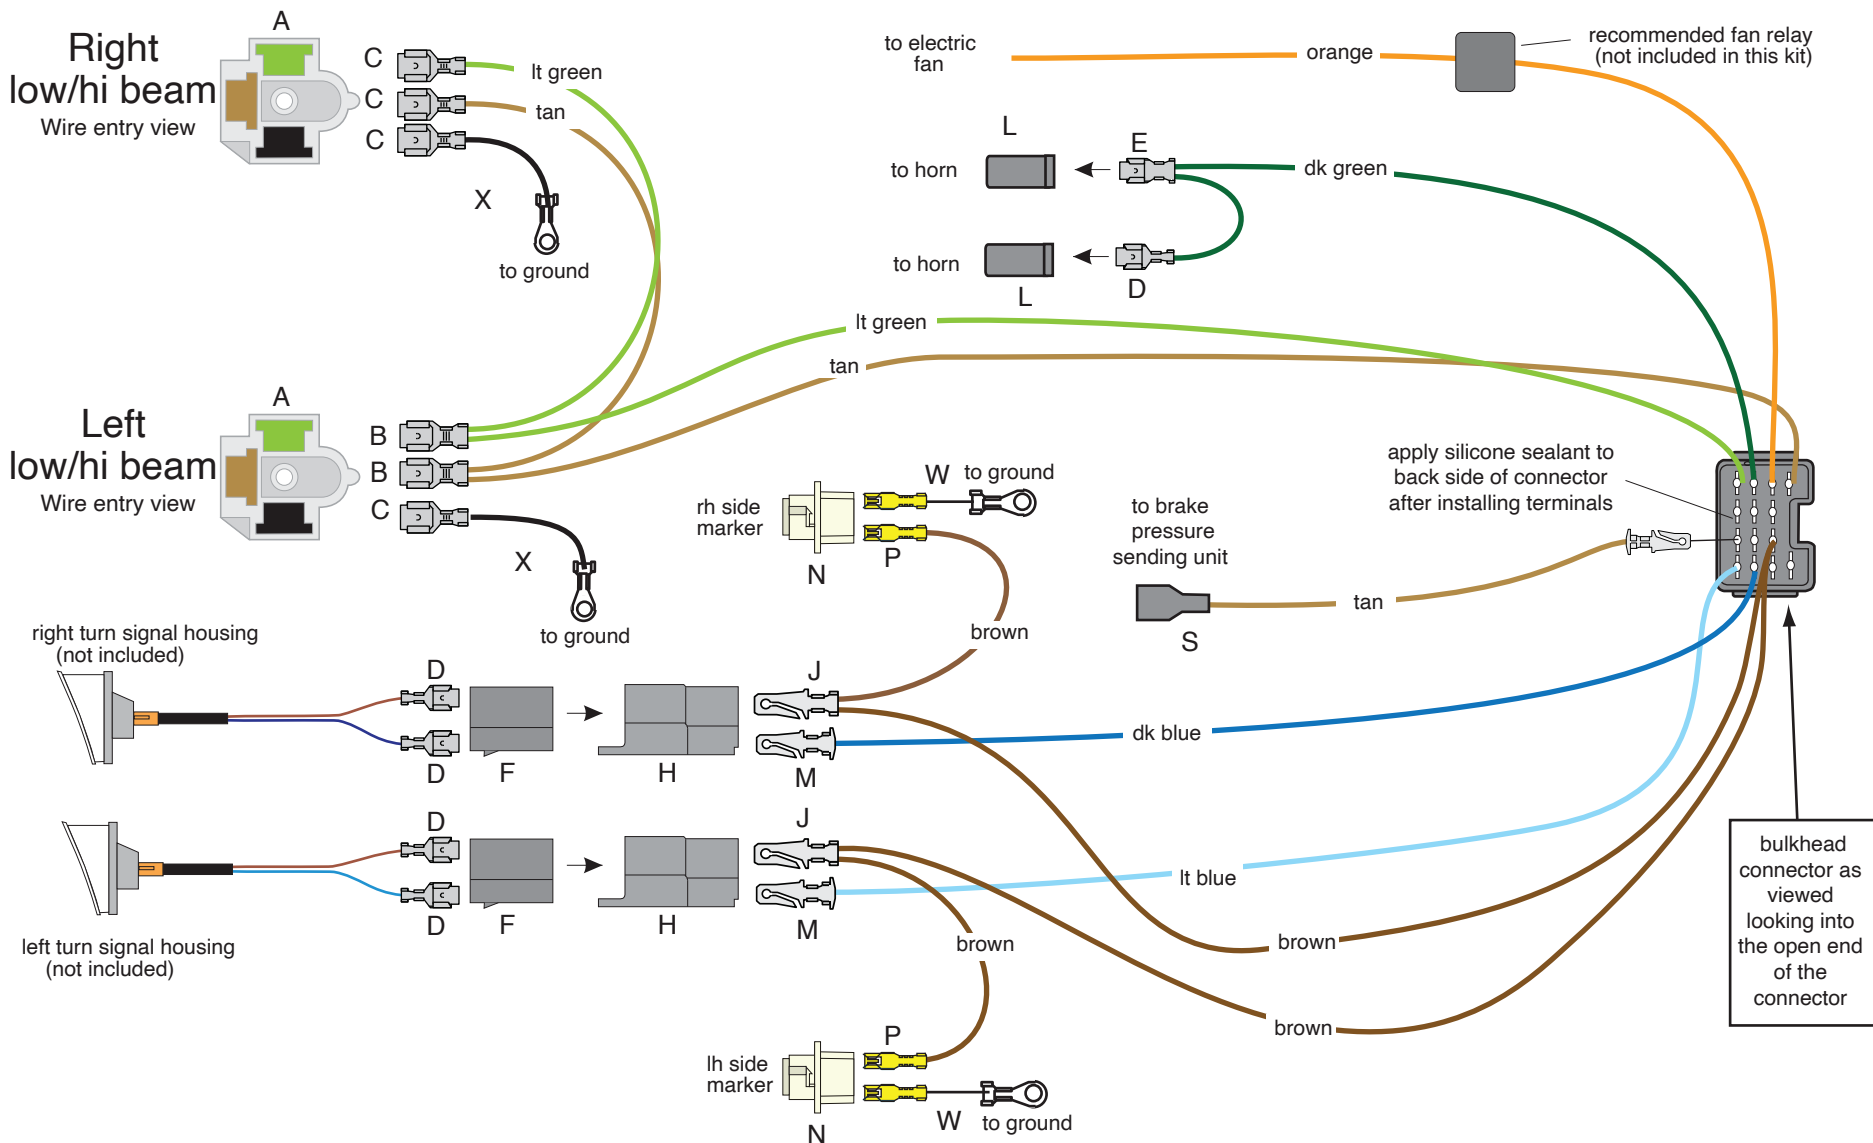

1968-72 Nova, All
 1967-68 Camaro, Rally Sport Front Light
 1969 Camaro, Standard and Rally Sport Front Light
 1970-73 Camaro, Standard and Rally Sport Front Light



**American
Autowire**

www.americanautowire.com 856-933-0801

FRONT LIGHT KIT

510511

92972437 instruction rev 2.0 5/18/2025

1967-68 Camaro Rally Sport Front Lighting, 1969 Camaro Standard and Rally Sport Front Lighting 1965-72 Nova Front Lighting, 1970-73 Camaro Standard and Rally Sport Front Lighting


Connect the bulkhead connector from this kit onto the bulkhead connector from the engine kit (bag J), and bolt to the firewall dash bulkhead.

LIGHT BLUE	LEFT FRONT TURN	Route this wire to the LH turn signal lamp install terminal M, and plug into connector H as shown on page 5.
DARK BLUE	RIGHT FRONT TURN	Route this wire to the RH turn signal lamp install terminal M, and plug into connector H as shown on page 5.
BROWN	PARK LIGHTS	Route one of the brown wires from the bulkhead connector to the LH (driver side) turn signal lamp and cut to length. Double this wire with the cut off portion, install terminal J, and plug into connector H with the light blue wire from above as shown on page 5. Route the other end of this brown wire connection to the LH side marker lamp, cut to length, install terminal P, and plug this connection into the LH side marker lamp socket N as shown on page 5. (Also plug the pre-assembled black ground wire W, into lamp socket N, as shown on page 5.) Route the other brown wire from the bulkhead connector to the RH turn signal lamp and cut to length. Double this wire with the cut off portion, install terminal J, and plug into connector H with the dark blue wire from above as shown on page 5. Route the other end of this brown wire connection to the RH side marker lamp, cut to length, install terminal P, and plug this connection into the RH side marker lamp socket N as shown on page 5. (Also plug the pre-assembled black ground wire W, into lamp socket N, as shown on page 5.)

NOTE: The running and directional light assemblies use factory parking lamp housing assemblies that are not serviceable. To connect them, plug completed connector H (on the wires above) onto the factory parking lamp housing assemblies as shown on page 5. New terminals D and connectors F have been provided in the event that your originals are damaged or are missing.

TAN	HEADLIGHT LOW BEAM	Route this wire to the LH (driver side) headlight and trim to length. Double this wire with the cut off portion, and install terminal B. Plug this terminal into connector A, in the location shown on page 5. Route the remaining portion of this tan wire to the RH (passenger side) headlight and trim to length. Install terminal C and connector A, in the location shown on page 5.
LIGHT GREEN	HEADLIGHT HIGH BEAM	Route this wire to the LH (driver side) headlight and trim to length. Double this wire with the cut off portion, and install terminal B. Plug this terminal into connector A, in the location shown on page 5. Route the remaining portion of this light green wire to the RH (passenger side) headlight and trim to length. Install terminal C and connector A, in the location shown on page 5.
BLACK	GROUND	Using the pre assembled ground wires X, to to lengths, install terminal C and plug into connector A, in the location shown on page 3. Connect the ring terminal to a good chassis ground. Complete for each headlight.
DARK GREEN	HORN	Route to horns and install terminals D & E, as shown on page 5, Plug into connectors L.
ORANGE	ELECTRIC FAN	Route to the electric fan, and connect per manufacturer's instructions. NOTE: This wire must only be used as the trigger wire for the electric fan relay. American Autowire manufactures relay kits for this application.
TAN	BRAKE LIGHT SWITCH	Plug wire pigtail S into the front light connector in the location shown on page 5. Plug the other end onto the stock brake sender switch as shown on page 5.

1967-68 Firebird Front Light

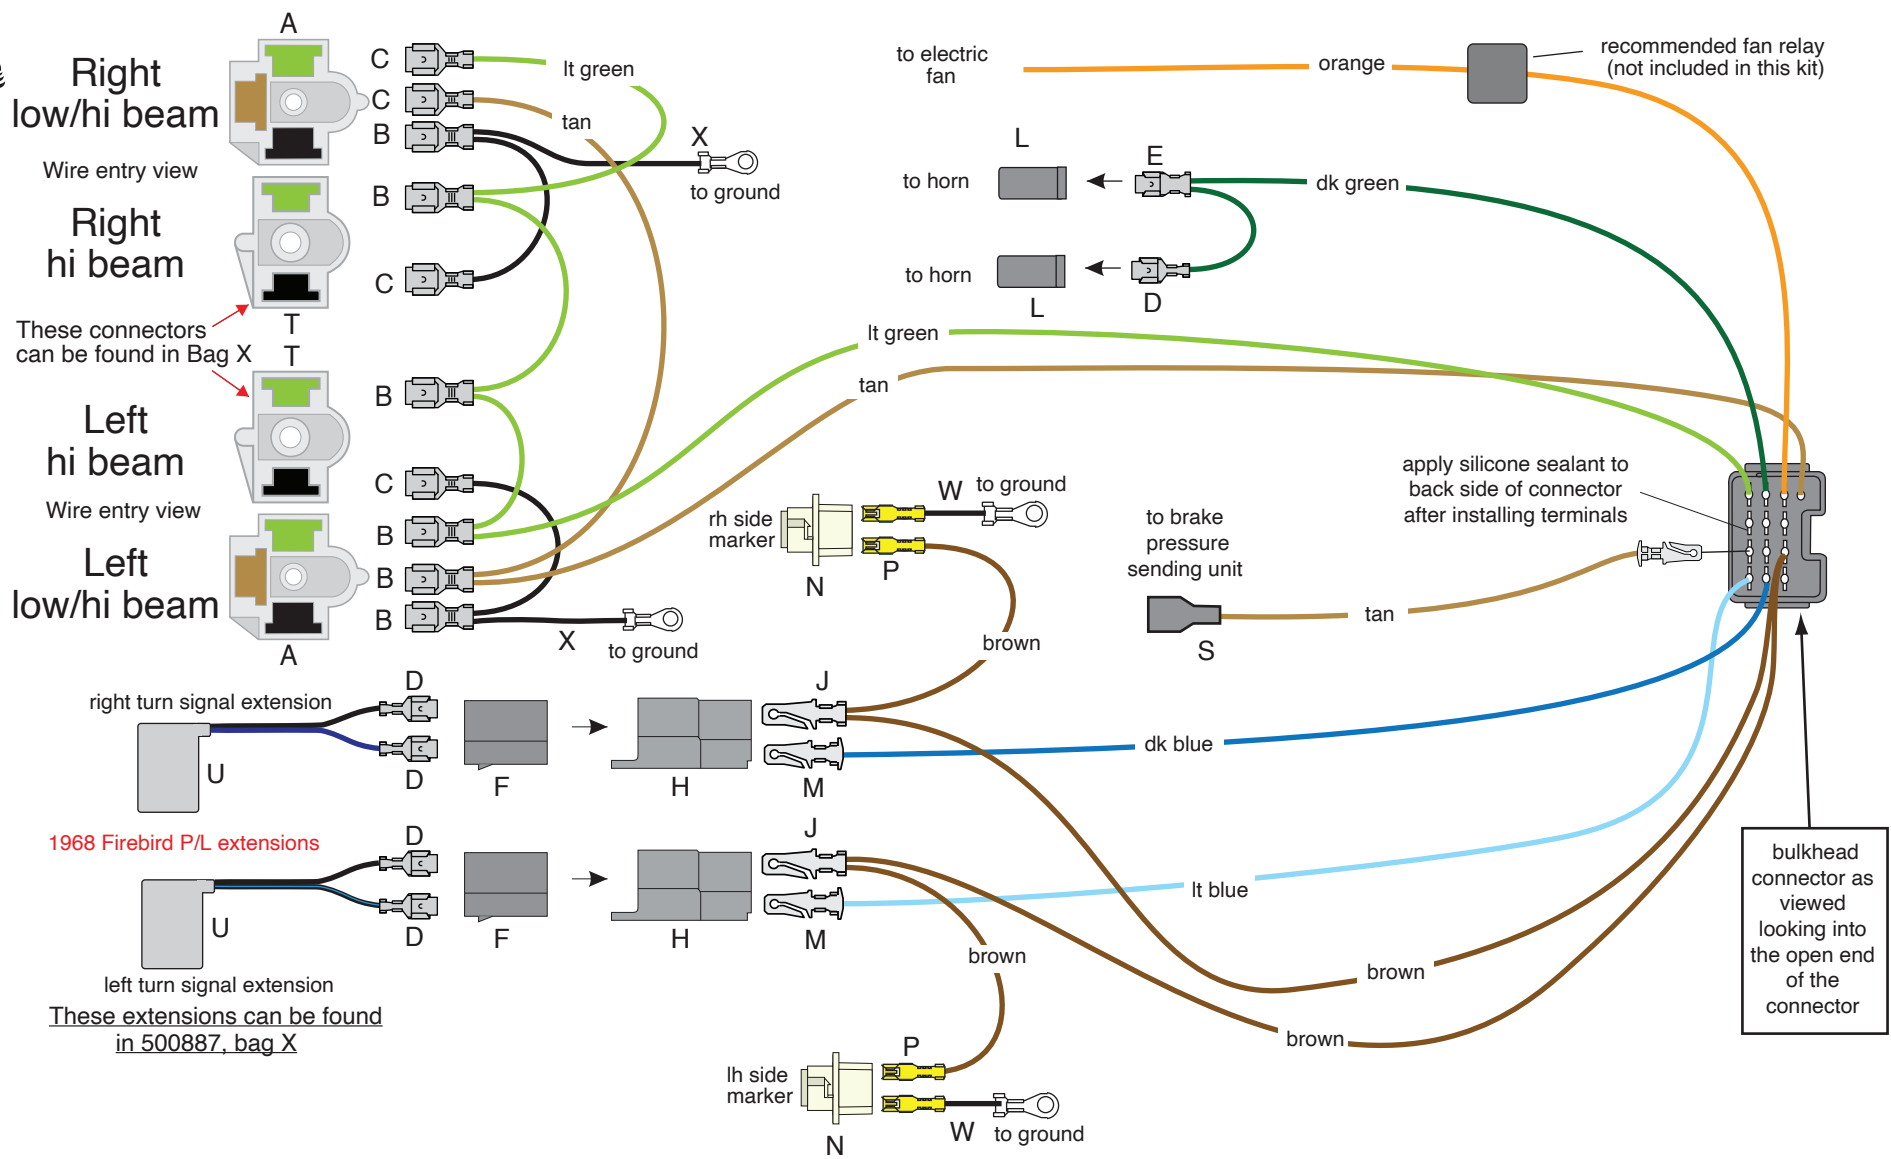

1967-68 Firebird Front Lighting

Connect the bulkhead connector from this kit onto the bulkhead connector from the engine kit (bag J), and bolt to the firewall dash bulkhead.

LIGHT BLUE	LEFT FRONT TURN	Route this wire to the LH turn signal lamp install terminal M, and plug into connector H as shown on page 7.
DARK BLUE	RIGHT FRONT TURN	Route this wire to the RH turn signal lamp install terminal M, and plug into connector H as shown on page 7.
BROWN	PARK LIGHTS	Route one of the brown wires from the bulkhead connector to the LH (driver side) turn signal lamp and cut to length. Double this wire with the cut off portion, install terminal J, and plug into connector H with the light blue wire from above as shown on page 7. Route the other end of this brown wire connection to the LH side marker lamp, cut to length, install terminal P, and plug this connection into the LH side marker lamp socket N as shown on page 7. (Also plug the pre-assembled black ground wire, W, into lamp socket N, as shown on page 7.) Route the other brown wire from the bulkhead connector to the RH turn signal lamp and cut to length. Double this wire with the cut off portion, install terminal J, and plug into connector H with the dark blue wire from above as shown on page 7. Route the other end of this brown wire connection to the RH side marker lamp, cut to length, install terminal P, and plug this connection into the RH side marker lamp socket N as shown on page 7. (Also plug the pre-assembled black ground wire W, into lamp socket N, as shown on page 7.)

NOTE: The running and directional light housings on all **1968 Firebirds** utilized a unique connection assembly. We have provided you with two pigtails U (500887, bag X) to plug into your factory housings. The black-black/light blue is for your LH (driver side) lamp, and the black/dark blue is for the RH (passenger side) lamp. Plug these pigtails onto your lamp housings, trim the wires to length, install terminals D and plug into connectors F as shown on page 7. Plug completed pigtail assemblies U, with connector F installed on them, into connectors H (as shown on page 7) to complete your front parking lamp circuits. The running and directional light assemblies on all **1967 Firebirds** will simply plug into the completed connectors H from above.

TAN	HEADLIGHT LOW BEAM	Route this wire to the driver side outer headlight and trim to length. Double this wire with the cut off portion and install terminal B. Plug this terminal into connector A, in the location shown on page 7. Route the remaining portion of this tan wire to the passenger side outer headlight and trim to length. Install terminal C and plug into connector A, in the location shown on page 7.
LIGHT GREEN	HEADLIGHT HIGH BEAM	Route this wire to the driver side outer headlight and trim to length. Double this wire with the cut off portion and install terminal B. Plug this terminal into connector A, make a short jumper over to the driver side inner headlight, cut to length, double it with the cutoff portion, install terminal B, and plug it into connector T in the location shown on page 7. Route the remaining portion of this light green wire to the passenger side inner headlight and trim to length. Double this wire with the cutoff portion, install terminal B and plug into connector T as shown on page 7. Make a short jumper over to the passenger side outer headlight, cut to length, double it with the cutoff portion, install terminal C, and plug it into connector A in the location shown on page 7.
BLACK	GROUND	Route one wire pigtail X, to the driver side outer headlight and trim to length. Double this wire with the cutoff portion, and install terminal B. Plug this terminal into connector A, take the short jumper over to the driver side inner headlight, cut to length, install terminal C, and plug it into connector T in the location shown on page 7. Repeat this process for the passenger side.
DARK GREEN	HORN	Route to horns and install terminals D & E, as shown on page 7, Plug into connectors L.
ORANGE	ELECTRIC FAN	Route to the electric fan, and connect per manufacturer's instructions. NOTE: This wire must only be used as the trigger wire for the electric fan relay. American Autowire manufactures relay kits for this application.
TAN	BRAKE LIGHT SWITCH	Plug wire pigtail S into the front light connector in the location shown on page 7. Plug the other end onto the stock brake sender switch as shown on page 7.

USE THIS SHEET FOR A NON-RALLY SPORT CAMARO OR NOVA



Connect the main connector to the mating connector on the dash harness 500662 bag G. Route this harness along door sill and into the trunk.

LIGHT BLUE
TAN

Third brake light
Fuel signal

Connect to the third brake lamp, if equipped.

Route this wire to the rear panel of the trunk (near fuel tank filler) and trim to length. Install terminal J and plug into connector M, as shown on sheet 1.

TAN

Fuel Tank lead
(with rubber end)

Plug the rubber end of this wire R onto the sending unit on fuel tank. Route the wire to the stock feed thru hole under fuel tank filler and install rubber grommet Q for a Camaro or U for a Nova in the direction shown on sheet 1. Secure this wire into hole with the attached grommet. In the trunk area, trim this wire to reach connector M from wire above. Attach terminal C and plug into connector K. Plug connector K into mating connector M. This should match the tan wire from above. Your existing license plate lamp wire will also plug into connector M. (Note: Terminal C and connector L are provided if you need to attach to your lamp wire.)

BROWN

Parking lamps

Route this wire to the left side marker and trim to length. Double this wire with the cut off portion, install terminal T and plug into lamp socket O. Route the loose end to the LH tail lamp, cut to length, double this wire with the cut off portion, install terminal N, and plug this terminal into connector F in the location shown on sheet 1. Route the loose end to connector M (from the tan wire above), and cut to length. Double this wire with the cut off portion, install terminal N and plug this terminal into connector M, in location shown on sheet 1. Route the loose end to the RH Tail lamp and cut to length. Double this wire with the cut off portion, install terminal N and plug this terminal into connector F, in the location shown on sheet 1. Route the loose end to the right side marker, trim to length, install terminal P, and plug into lamp socket O.

BLACK

Side Marker Ground

There are two loose black wires in this kit. Plug each into the rear side markers (connector O). Route the black wires to the rear panel support (near fuel tank filler) and attach to ground.

YELLOW

LH Stop / Tail

Route this wire to the LH tail lamp and cut to length and install terminal J. Plug this wire into connector F from above. Install terminal C and connector E on the tail lamp pigtail A, maintaining color continuity with connector F. Plug connector E into connector F.

DK GREEN

RH Stop / Tail

Route this wire to the RH tail lamp and cut to length and install terminal J. Plug this wire into connector F from above. Install terminal C and connector E on the tail lamp pigtail A, maintaining color continuity with connector F. Plug connector E into connector F.

LIGHT GREEN

Back up lamp feed

Route this wire to the LH back up lamp, trim to length and install terminal N and connector H. Route the loose end of the lt green wire to the right side back up lamp. Repeat this procedure with terminal J. Install terminals C on each of the back up pigtails B, and plug into connectors H.

WHITE

Courtesy ground

At the driver's side kick panel area, cut this wire, double it with the cut off portion using terminal D, and plug into connector E maintaining color continuity with the mating connector in the courtesy lamp kit (bag N). If you are using a dome lamp, route the loose end of this wire to the rear pillar area of the trunk, install terminal J and connector F. (Note: a factory dome lamp harness will also plug into this connector if you are not replacing the headliner at this time.) For a roof mounted single dome lamp, install the loose white wire S (supplied with terminal installed) into the dome lamp. Route this wire to connector F (on orange wire) location and trim to length. Install terminal C and connector E, maintaining color continuity with the white wire in connector F. If you are using dual sail panel dome lamps on a Camaro with Deluxe Interior, we have included a long loose white wire in this kit. Install terminal V onto one end of that wire, plug that terminal into one of the dual sail panel lamps and route that wire to connector F (on white wire) location and trim to length. Install terminal V onto the remainder of the cut off portion of the white wire, plug that terminal into the other dual sail panel lamp and route that wire to connector F (on white wire) location and trim to length. Double these wires together using terminal D and plug into connector E maintaining color continuity with connector F at the rear pillar area. Plug connector E into connector F to complete the dome lamp circuit.

ORANGE


Courtesy Lamp

At the driver's side kick panel area, cut this wire, double it with the cut off portion using terminal D, and plug into connector E maintaining color continuity with the mating connector in the courtesy lamp kit (bag N). If you are using a dome lamp, route the loose end of this wire to the rear pillar area of the trunk, install terminal J and connector F. (Note: a factory dome lamp harness will also plug into this connector if you are not replacing the headliner at this time.) For a roof mounted single dome lamp, install the loose orange wire S (supplied with terminal installed) into the dome lamp. Route this wire to connector F (on orange wire) location and trim to length. Install terminal C and connector E, maintaining color continuity with the orange wire in connector F. If you are using dual sail panel dome lamps on a Camaro with Deluxe Interior, we have included a long loose orange wire in this kit. Install terminal X onto one end of that wire, plug that terminal into one of the dual sail panel lamps and route that wire to connector F (on orange wire) location and trim to length. Install terminal X onto the remainder of the cut off portion of the orange wire, plug that terminal into the other dual sail panel lamp and route that wire to connector F (on orange wire) location and trim to length. Double these wires together using terminal D and plug into connector E maintaining color continuity with connector F at the rear pillar area. Plug connector E into connector F to complete the dome lamp circuit.

DK BLUE

Fuel Pump

This wire can be used if you are using an electric fuel pump. Plug the terminated end into the 6 way power disconnect on the dash harness, maintaining color continuity with the dk blue wire in the mating connector. Route the other end to a fuel pump relay (not included in this kit, but available from American Autowire).

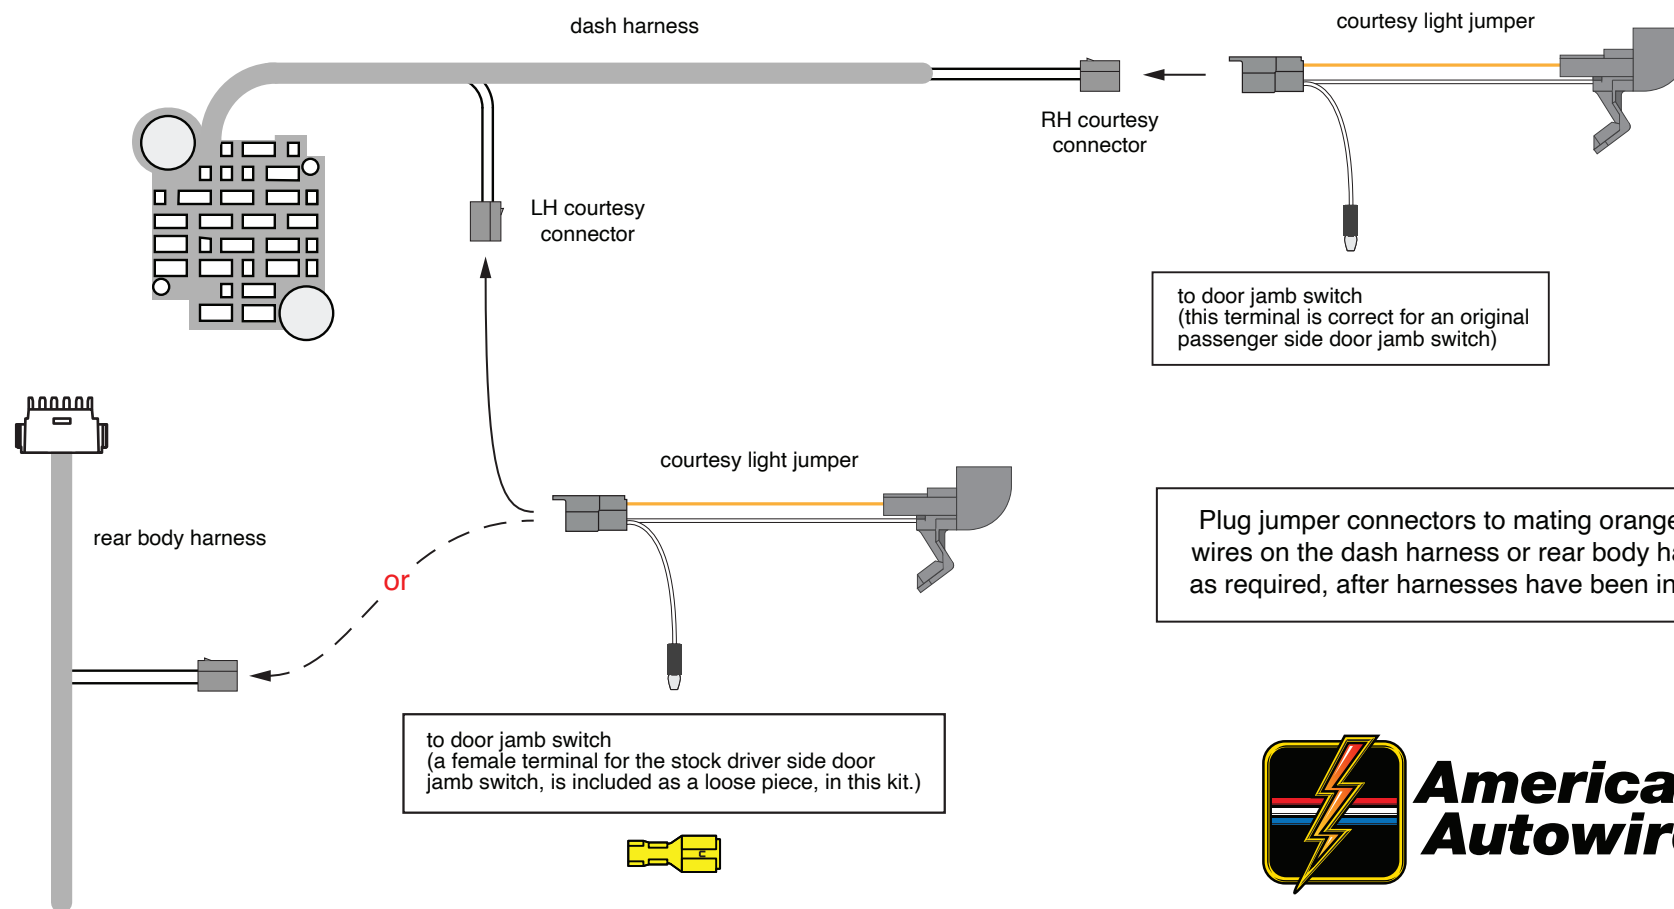

Plug jumper connectors to mating orange/white wires on the dash harness or rear body harness, as required, after harnesses have been installed.



**American
Autowire**

www.americanautowire.com 856-933-0801

NOTE: Your new underdash courtesy light kit uses # 631 bulbs (not included with this kit). They may be purchased at any auto parts store.

PART #

500708

N

DESCRIPTION:

Courtesy Light Kit

92966085


Rev 1.1

6/27/2016

Most switches supplied with Classic Update and Universal Kits ship with the shaft pre-installed. In many instances, the switch can be installed without removing the shaft, but in some cases the switch shaft may need to be trimmed to fit your specific dash. In this situation, reference Trim to Fit instructions on the back of this page for details.

To install your new headlight switch:

1. Install the switch from behind the dash, and align the switch body with the mounting hole. The switch body has an alignment tab that must line up with the notch in the dashboard mounting hole.

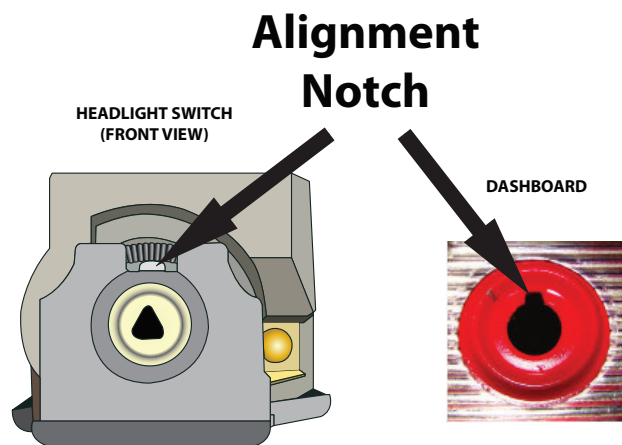


2. Install the switch mounting nut and tighten.

3. Gently press shaft into switch until it stops, then press firmly until it “clicks.” Pull shaft back out to confirm it is seated correctly. The shaft should be locked into place inside switch.

4. If the shaft does not lock, reinsert applying moderate pressure and slowly move shaft side to side for lock to engage. Make sure switch body is still supported to prevent flexing. Press shaft firmly until it clicks into place.

5. Ensure the shaft is fully seated and in the off position.

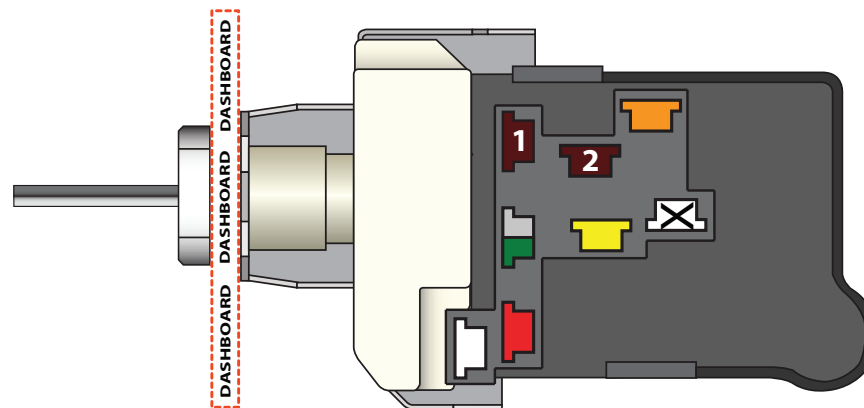

1	Parking Lights - Stay on with headlights
2	Tail Lights - On in the park and headlight positions
Orange	Fused Battery Feed - For park, tail and dash lamps
Yellow	Headlight Feed - Power to the headlight dimmer switch
Red	12V Battery Feed - Unfused power to the switch for headlights
White	Courtesy Ground - Ground feed to the dome and courtesy lights
⊗	Part-Time Parking Lights - Turns off when the headlights are on (Not supported by all kits)
OR	
Green	Dash Lights - Output to the dash light fuse or lights



www.americanautowire.com 856-933-0801

PART #

500332

DESCRIPTION:

Headlight Switch

92964649

Rev 3.0


1/3/2020

To Trim Shaft to Fit or Remove Shaft:


The headlight switch knob should extend from the face of the mounting nut, and must allow enough clearance for the switch to turn off. If the shaft is longer than necessary for your specific dash it can be trimmed to fit. Always trim the knob end of the shaft only and follow the guidelines below for best results.

1. With the headlight switch installed, loosen the set screw and remove the knob. Make sure the switch is in the "off" position by pushing the shaft toward the back of the switch.





Switch in OFF position
(shaft pushed all the way in)

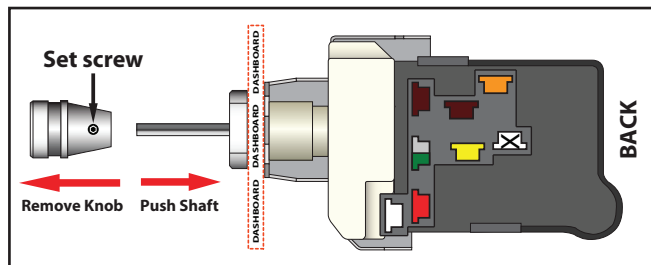


2. Set knob alongside shaft and mark the desired location for cutting on the shaft.

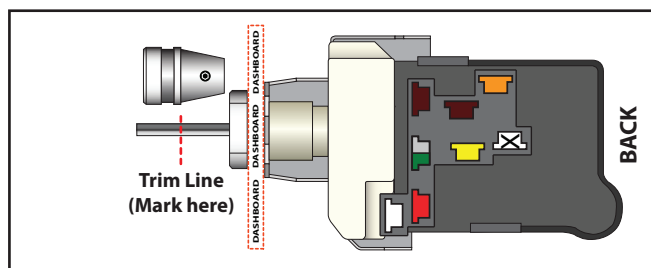

3. Remove the shaft and trim at mark. The shaft can be released from the switch by pulling it outward (toward the rear of the vehicle). Once fully in the "On" position, press and hold the release button on the base of the switch body. Once button is pressed, continue to pull the shaft outward. New switches may be tight, and it might be necessary to move the shaft side to side slightly while pulling to release.

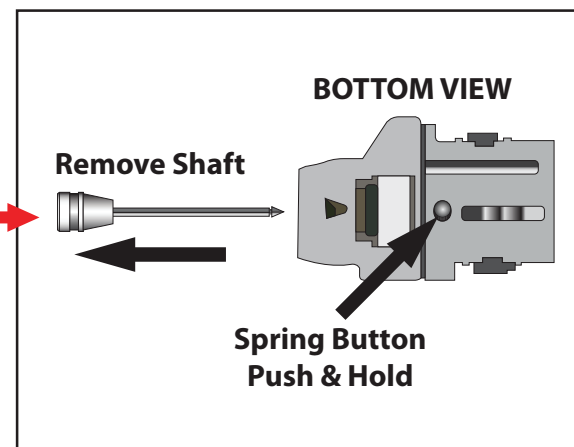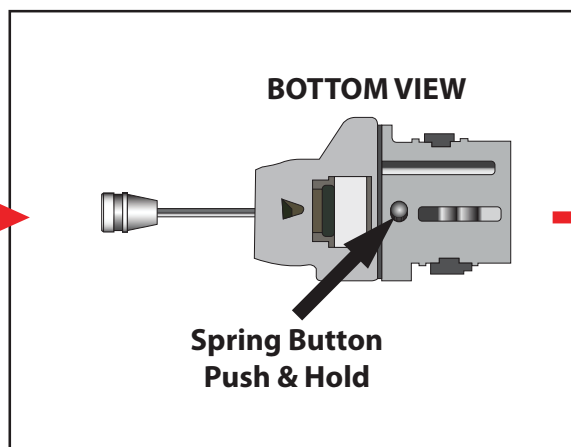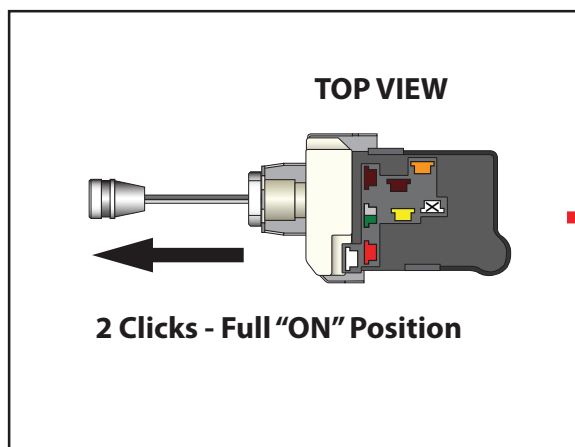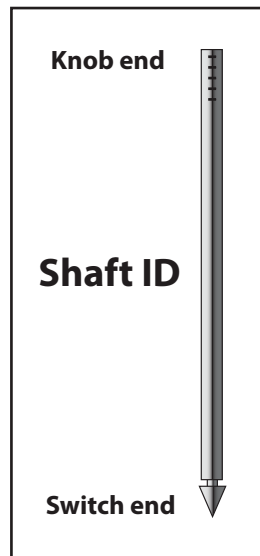

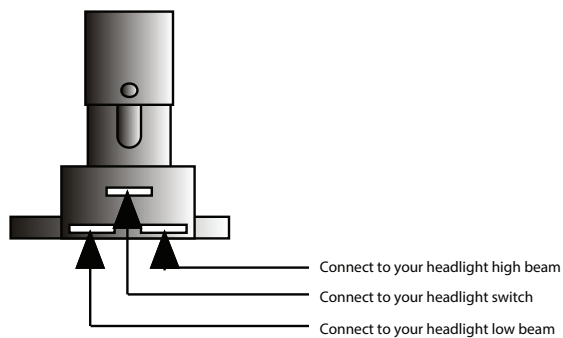

Connect the Dimmer Switch wires as shown above.

1. The top center terminal of the Dimmer Switch is connected to the Headlight switch.
2. The terminal on the right side is connected to your headlight high beam terminal.
3. The terminal on the left side is connected to your headlight low beam terminal.

another wiring product by...



150 Heller Pl #17 W Bellmawr, NJ 08031 856-933-0801


PART #

500042

DESCRIPTION:

DIMMER SWITCH

92964573 instruction sheet Rev 3.0 6/29/99

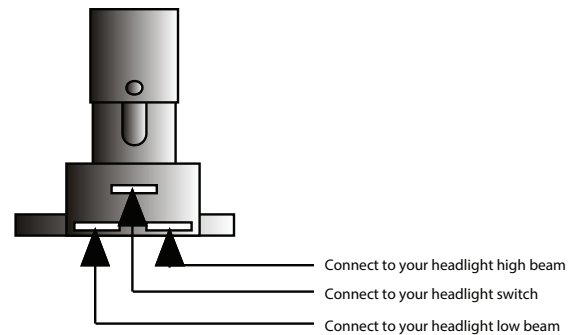

Connect the Dimmer Switch wires as shown above.

1. The top center terminal of the Dimmer Switch is connected to the Headlight switch.
2. The terminal on the right side is connected to your headlight high beam terminal.
3. The terminal on the left side is connected to your headlight low beam terminal.

another wiring product by...



150 Heller Pl #17 W Bellmawr, NJ 08031 856-933-0801

PART #

500042

DESCRIPTION:

DIMMER SWITCH

92964573 instruction sheet Rev 3.0 6/29/99